

PCA Door Series Sizing Information

√ = Available size

! = Available but not recommended

X = Not available

A Series													
	Width												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	√	√	√	√	√	√	√	√	√	√	√	√
	90	√	√	√	√	√	√	√	√	√	√	√	√
	84	√	√	√	√	√	√	√	√	√	√	√	√
	80	√	√	√	√	√	√	√	√	√	√	√	√

B Series													
	Width												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	√	√	√	√	√	√	√	√	√	√	√	√
	90	√	√	√	√	√	√	√	√	√	√	√	√
	84	√	√	√	√	√	√	√	√	√	√	√	√
	80	√	√	√	√	√	√	√	√	√	√	√	√

C-500 Series													
	Width												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	X	X	X	√	√	√	√	√	!	!	!	
	90	X	X	X	√	√	√	√	√	!	!	!	
	84	X	X	X	√	√	√	√	√	!	!	!	
	80	X	X	X	√	√	√	√	√	!	!	!	

C-510 Series													
	Width												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	√	√	√	√	√	√	√	√	!	!	!	
	90	√	√	√	√	√	√	√	√	!	!	!	
	84	√	√	√	√	√	√	√	√	!	!	!	
	80	√	√	√	√	√	√	√	√	!	!	!	

I-750 Series													
	Width												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	√	√	√	√	√	√	√	√	!	!	!	
	90	√	√	√	√	√	√	√	√	!	!	!	
	84	√	√	√	√	√	√	√	√	!	!	!	
	80	√	√	√	√	√	√	√	√	!	!	!	

N-10xx Series													
	Width												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	X	X	√	√	√	√	√	√	!	!	!	
	90	X	X	√	√	√	√	√	√	!	!	!	
	84	X	X	√	√	√	√	√	√	!	!	!	
	80	X	X	√	√	√	√	√	√	!	!	!	

N-20xx (Nature) Series													
	Width												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	X	X	X	√	√	√	√	!	X	X	X	
	90	X	X	X	√	√	√	√	!	X	X	X	
	84	X	X	√	√	√	√	√	!	X	X	X	
	80	X	X	√	√	√	√	√	!	X	X	X	

O Series (O-280 min width = 35")													
	Width (40" & wider add vertical pickets)												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	X	X	X	!	√	√	√	√	!	!	!	
	90	X	X	X	!	√	√	√	√	!	!	!	
	84	X	X	X	!	√	√	√	√	!	!	!	
	80	X	X	X	!	√	√	√	√	!	!	!	

P Series													
	Width (40" & wider add vertical pickets)												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	X	X	√	√	√	√	√	√	!	!	!	
	90	X	X	√	√	√	√	√	√	!	!	!	
	84	X	X	√	√	√	√	√	√	!	!	!	
	80	X	X	√	√	√	√	√	√	!	!	!	

Q-1500,1510, 1520, 1530, 1540, 1550, 1600 Series													
	Width												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	√	√	√	√	√	√	√	√	√	√	√	
	90	√	√	√	√	√	√	√	√	√	√	√	
	84	√	√	√	√	√	√	√	√	√	√	√	
	80	√	√	√	√	√	√	√	√	√	√	√	

Q-1515 Series													
	Width												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	X	X	X	√	√	√	√	X	X	X	X	
	90	X	X	X	√	√	√	√	X	X	X	X	
	84	X	X	X	√	√	√	√	X	X	X	X	
	80	X	X	X	√	√	√	√	X	X	X	X	

T Series													
	Width												
	26	28	30	32	34	36	38	40	42	44	46	48	
Height	96	X	X	X	√	√	√	√	√	!	!	!	
	90	X	X	X	√	√	√	√	√	!	!	!	
	84	X	X	X	√	√	√	√	√	!	!	!	
	80	X	X	X	√	√	√	√	√	!	!	!	

Tasman Ordering Information

Upon ordering, it is important to specify the hinge placement viewing the door from the outside looking in. See examples below.

Standard placement of lock on most door designs is at 39-3/4" from the bottom of the door to the center of the handle.

Exception: Certain door designs dictate the position of the lock placement.

Tasman lock can be placed at a special height on the door as per your request.

Left Hinge (LH)
(From outside looking in)



Please Note:
All doors illustrated
depict grille work
to outside of screen
placement.

Center of Handle

39-3/4"



Right Hinge (RH)
(From outside looking in)

PCA Side-Lite Sizing & Suggested Door Series Compatibility Chart

Side-Lite Series	**MINIMUM Width REQUIRED	A-100	A-300	A-500	B-300	B-500	C-500	C-510	I-750	N-1020	N-1030	N-1035	N-1040	N-1050	O-250	O-260	O-270	O-280	O-290	O-300	P-100	P-110	P-120	P-130	P-140	P-150
SL_10-05	4"	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
SL_40-05	8"						X	X																		
SL_40-10	10"						X																			
SL_40-15	12"						X	X																		
SL_40-20	16"						X	X																		
SL_40-25	18"						X																			
SL_50-05	8"								X																	
SL_50-10	18"								X																	
SL_60-05	10"									X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
SL_60-10	12"									X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
SL_60-15	16"									X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
SL_60-20	8"									X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
SL_60-25	12"									X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
SL_60-30	16"									X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
SL_70-05	10"														X	X	X	X	X	X						
SL_70-10	10"														X	X	X	X	X	X						
SL_70-15	10"														X	X	X	X	X	X						
SL_70-20	18"														X	X	X	X	X	X						
SL_70-25	18"														X	X	X	X	X	X						
SL_70-30	18"														X	X	X	X	X	X						

Legend: X = Suggested Side Lite for Screen Door Series

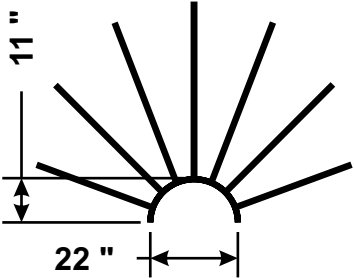
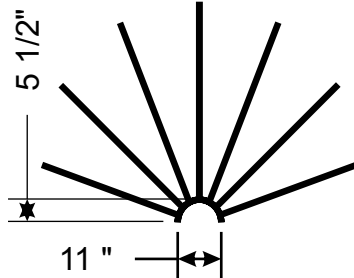

****Minimum width required to ensure proper fit of Side-Lite. Dimension is from inside of the door post to inside of extrusion at wall.**

PCA Side-Lite Sizing & Suggested Door Series Compatibility Chart

Side-Lite Series	**MINIMUM Width REQUIRED	Q-1500	Q-1510	Q-1515	Q-1520	Q-1530	Q-1540	Q-1550	Q-1600	T-1250	T-1260	T-1270	T-1280	T-1290	T-1300	T-1310
SL_10-05	4"	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
SL_80-05	6"	x	x	x												
SL_80-10	12"	x	x	x												
SL_80-15	12"	x	x	x												
SL_80-20	6"				x	x										
SL_80-25	12"				x	x										
SL_80-30	12"				x	x										
SL_80-35	6"						x	x								
SL_80-40	12"						x	x								
SL_80-45	12"						x	x								
SL_80-50	12"								x							
SL_90-05	8"									x	x	x	x	x	x	x
SL_90-10	10"											x	x	x		x
SL_90-15	10"											x	x	x		x
SL_90-20	10"									x						x
SL_90-25	10"										x					x
SL_90-30	10"											x	x	x		x
SL_90-35	12"									x	x	x	x	x	x	x
SL_90-40	16"									x	x	x	x	x	x	x
SL_90-45	18"											x	x	x		x
SL_90-50	18"											x	x	x		x
SL_90-55	18"									x						x
SL_90-60	18"										x					x
SL_90-65	18"											x	x	x		x

Legend: X = Suggested Side Lite for Screen Door Series

**Minimum width required to ensure proper fit of Side-Lite. Dimension is from inside of the door post to inside of extrusion at wall.

Ring Dimensions		Transom Size Range Sunburst can Accomodate	
		Width	Height
B-Series		48" - 144"	24" - 96"
	C-Series 	36" - 144"	18" - 96"
	D-Series 	48" - NA	24" - NA
Material: All PCA Sunburst kits are constructed of 3/4" square aluminum picket.			