



SE500 NDB Transmitter - Rack Mount

Part Number: SLF34002

SPECIFICATION SHEET

5055 Belmont, Beaumont, TX 77707
 Phone +409.842.1717/1.800.648.6158 (Toll Free in the US)
 Fax +409.842.2987
 sales@southernavionics.com



Application:


The SE Series NDB Transmitter uses state of the art technology including a powerful Renesas© Microcontrollers and Analog Devices© Direct Digital Synthesizers to provide accurate beacon signals in power levels ranging from 50 Watts to 500 Watts carrier power.

The SE unit provides simplified set-up & maintenance procedures, comprehensive BITE, and full Ethernet capability accessible by both internal and external RJ45 connections. Connect directly from the transmitter to PC or through any of our other connection options (see page 2).

The SE500 comes with built in Webwatch software. Webwatch enables the user to control and monitor the transmitter on a laptop or PC. SAC provides the user with an IP address to access Webwatch using any Internet connection.

FEATURE	SPECIFICATION
Frequency	190-535 kHz synthesized (Optionally 190-650)
Frequency Tolerance	5 ppm TCXO Oscillator standard (Optional 1ppm TCXO)
Power Output	50 - 500 Watts
Noise and Hum Levels	More than 40 dB below the carrier level
Spurious Emission	More than 70 dB below the carrier level
Type of Emission	NON, A2A, A3E
Modulation	Switching modulator/regulator, 0-95%, internal 400 or 1020 Hz, eight baud Keyer, 8 character Identifier max length
Input Power	230 VAC +/- 15%, 47-63 Hz, or 144 VDC
Antenna Connection	Type-N female output
Display	40 character by 4 line LCD
Metering	Power output, reflected power, percent modulation PA voltage, PA current
Monitoring	Automatic transfer to secondary transmitter if tone, modulation, power or VSWR drift beyond a user adjustable level
Interface	RS485 Barrier block connector for Remote Control Unit
Working Conditions	-40°C - +55°C, 0 - 95% Humidity
Height	41 in. (104cm)
Depth	25 in. (62cm)
Width	21 in. (54cm)
Weight	267 lbs. (121kg)

*Information provided is subject to change without notice

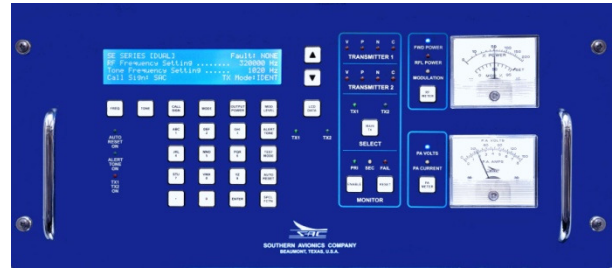

Ethernet Monitoring and Control Options Include (All Ethernet options utilize the Webwatch Software):

- Ethernet Copper Extender: extend up to 1 mile (1.6km) (P/N SLF83301)
- Ethernet Fiber Extension: Up to 1.2 miles (1.9km) for multi-mode (P/N SLF83308) and 12.4 miles (20km) in single mode (P/N SLF83303)
- Ethernet Radio Link: utilizes IP67 transceiver and 5.8 GHz planar antenna to allow Webwatch monitoring up to 7 miles (11km) away. (P/N SLF83304)
- Ethernet Land Line Dial-Up: allows access of Ethernet network from any remote location over standard telephone lines. (P/N SLF83314)
- Ethernet Extender: allows extension of Ethernet communication network via a RJ-11 terminate TELCO Network cable (P/N SLF83315)

Remote Control Unit Options Include:


- Remote Control Unit: Up to 4000 ft. via RS-485 for full monitoring with basic controls. (P/N SLF33090)
- Remote Control Over Ethernet Radio Link: Combines both RCU and Webwatch Monitoring and Control; Up to 7 miles (11km) away (P/N SLF83323)
- RS485 to ST MM Fiver Converter: connect RCU to unit over Multi Mode Fiber; Up to 1.3 miles (2km) away (P/N SLF83319)
- RS485/RS232 to Ethernet Serial: allows monitoring and partial control via RCU using user's LAN (P/N SLF83322)

The SE500 Rack Mount Transmitter comes standard with an internal 5 Port Switch. There is an access point to the Switch. The RJ45 port is located on the back of the transmitter. All 5 ports can be accessed once inside the unit.

Using the External RJ45 port, a user can connect a laptop or PC directly to the transmitter's switch. This gives access to our built-in Webwatch monitoring and control software. When connected to a network, the user can also directly connect to the unit for Internet access. This can be used to send a receive emails to the SAC tech department with troubleshooting questions or any other web functions.

The 5 Port Switch can be used to connect to a WiFi Network, Land Line Network, or any of our Ethernet Control and Monitoring Options or Remote Control Unit Connection Options.

External RJ45 Port
Connects to Internal Switch

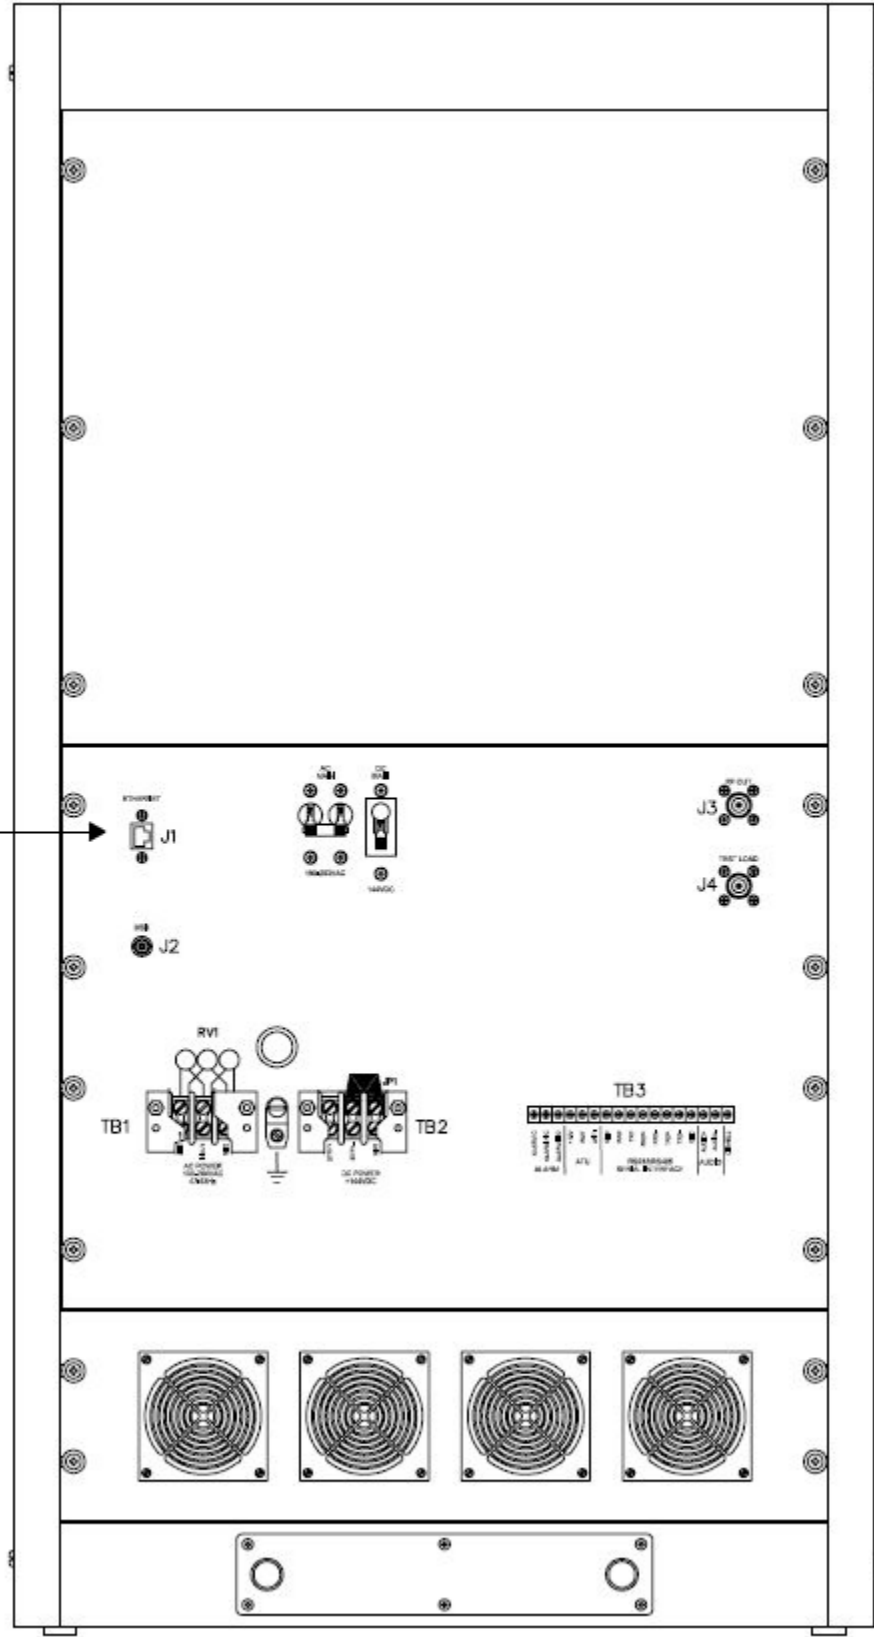

Back View