

Home 4G

SKU: 470101 MAP: \$399.99

FEATURES

- Boosts 4G LTE & 3G signals for a desktop workspace area at home or small office
- Coverage area up to 1,500 sq. ft.
- For multiple devices and users
- Works on ALL cellular devices with ALL carriers simultaneously
- Enhances talk, text, and high-speed 4G LTE internet



- LTE** FASTEST NETWORK SPEEDS
- UP TO 1,500 sq. ft. COVERAGE
- UP TO +60 dB GAIN
- MULTI-USER WIRELESS BOOSTER

About

The **Home 4G** ensures you get better voice and data with fewer dropped calls, improved voice quality, faster uploads and downloads. This premier home signal booster can increase cell signals up to 32x while enhancing 4G LTE and 3G signals for buildings up to 1,500 sq. ft.

weBoost's Home 4G is compatible with all U.S. and Canadian networks including Verizon, AT&T, Sprint, T-Mobile, US Cellular, Straight Talk and more. Each device comes with everything you need for complete installation including an indoor antenna, outdoor antenna, power supply, 30' cable, and trained support staff on call to assist with the DIY installation.

All boosters come with a 2-year warranty.

Kit Includes



Home 4G



Outside Panel Antenna (311155)



Inside Desktop Antenna (301211)



Power Supply (850003)



30' White Low Loss RG6 (75ohm) Coax Cable (x2) (950630)



Flat Window Cable (951152)


Coverage Area

IF YOUR OUTSIDE SIGNAL IS	YOUR BOOSTED SIGNAL MAY BE
●●●● -89 AND LOWER About 5 bars	UP TO 1,500 sq. ft.
●●●● -90 dB About 3 to 4 bars	UP TO 1,000 sq. ft.
●●●● -100 dB About 3 to 4 bars	UP TO 150 sq. ft.
○○○○ No existing	A signal booster likely will not work

Specifications

MODEL NUMBER	470101	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 2	1900 MHz
MAX GAIN	60 dB	
IMPEDANCE	75 Ohm	
POWER	110-240V AC, 50-60 Hz, 8 W	
CONNECTORS	SMA Female / F-Female	
BOOSTER DIMENSIONS	6.5 x 4.25 x 1.25 in	
BOOSTER WEIGHT	0.445 lbs	

Installation

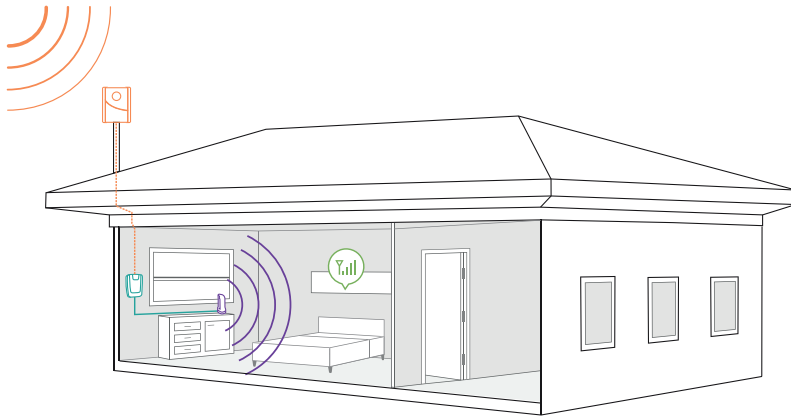

- 1 **Receives signal:** The powerful antenna reaches out to access a voice and 3G, 4G, and LTE data signal, and delivers it to the booster.
- 2 **Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 **Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

Available Accessories

Optional Antenna Kits




Lightning Surge Protector 75 Ohm (859992)



RG-6 F-Male / F-Male, 2ft White Cable (950602)



20 ft. White RG6 Low Loss Coax (950620)




F-Female to F-Female Barrel Connector (971129)




Inside Antenna Upgrade Kit (304447)

Package Dimensions


5.25 L x 14.5 W x 11.25 H



FRONT



SIDE



TOP/BOTTOM



6.55 lbs.

WEIGHT

MASTER CARTON: 25 L x 18 W x 16 H | 43 Lbs.

Support




2 Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660
Monday to Saturday

FOR PARTNER'S USE

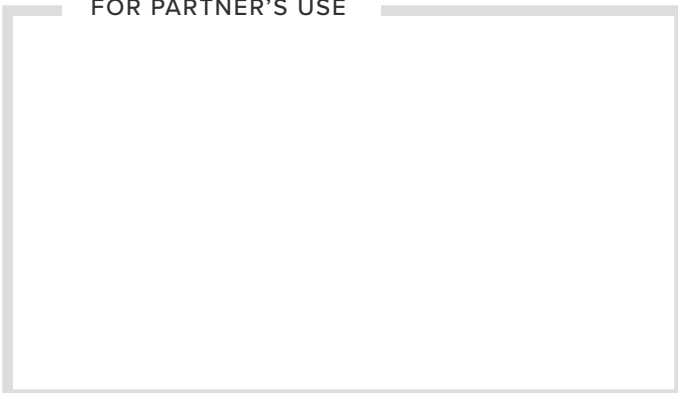

UPC

