

# Connect 4G-X

SKU: 471104    MAP: \$899.99

## FEATURES

- Boosts 4G LTE & 3G signals for small offices and large homes
- Coverage area up to 7,500 sq.
- For multiple devices and users
- Works on ALL cellular devices with ALL carriers simultaneously
- Enhances talk, text, and high-speed 4G LTE internet



- LTE** FASTEST NETWORK SPEEDS
- UP TO 7,500 sq. ft. COVERAGE
- UP TO +70 dB GAIN
- MULTI-USER WIRELESS BOOSTER

## About

The weBoost **Connect 4G-X** cell phone signal booster is our most powerful 4G building booster. weBoost's 4G-X is professional grade, allowing users to get better voice and data with fewer dropped calls, improved voice quality, faster uploads and downloads. This 4G-X Booster increases cell signals up to 32x and enhances 4G LTE and 3G signals for buildings up to 7,500 sq ft. As with all of our boosters, it is compatible with all US and Canadian networks including Verizon, AT&T, Sprint, T-Mobile, US Cellular, Straight Talk and more. Quick and easy installation with easy instructions from our Quick Install Guide.

All parts are included in the weBoost 4G-X kit and friendly trained support staff on call to assist. All boosters come with a 2-year warranty.

## Coverage Area

IF YOUR OUTSIDE SIGNAL IS	YOUR BOOSTED SIGNAL MAY BE
●●●● -89 AND LOWER About 5 bars	UP TO 7,500 sq. ft.
●●●● -90 dB About 3 to 4 bars	UP TO 4,000 sq. ft.
●●○○ -100 dB About 3 to 4 bars	UP TO 2,000 sq. ft.
○○○○ No existing	A signal booster likely will not work


## Kit Includes

- Connect 4G-X
- Outside Directional Antenna (314411)
- Inside Panel Antenna (311135)
- Power Supply (859900)
- 75' + 60' Black Low Loss Wilson 400 Coax Cables (952375) (952360)

## Specifications

MODEL NUMBER	471104	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 2	1900 MHz
MAX GAIN	70 dB	
IMPEDANCE	50 Ohm	
POWER	110-240V AC, 50-60 Hz, 20 W	
CONNECTORS	N-Female	
BOOSTER DIMENSIONS	8.75 x 6.25 x 1.5 in	
BOOSTER WEIGHT	2.575 lbs	

## Installation

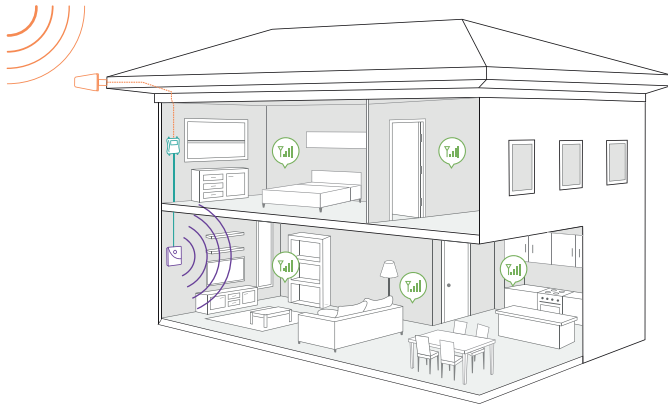

- 1 Receives signal:** The powerful antenna reaches out to access a voice and 3G, 4G, and LTE data signal, and delivers it to the booster.
- 2 Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

## Available Accessories

Optional Antenna Kits



4G Interior Wall Mount Panel Antenna (311135)



Lightning Surge Protector 50 Ohm (859902)



Splitter -3 dB 2 Way (859957)



Wilson 400 Ultra Low-Loss Cable 2ft (952302)



Wilson 400 Ultra Low-Loss Cable 20ft. (952320)




N-Female to N-Female Barrel Connector (971117)

## Package Dimensions


19.5 L x 12.25 W x 12 H



FRONT



SIDE



TOP/BOTTOM



WEIGHT

MASTER CARTON: 25 L x 20 W x 15 H | 17 Lbs.

## Support




2 Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660  
Monday to Saturday

FOR PARTNER'S USE

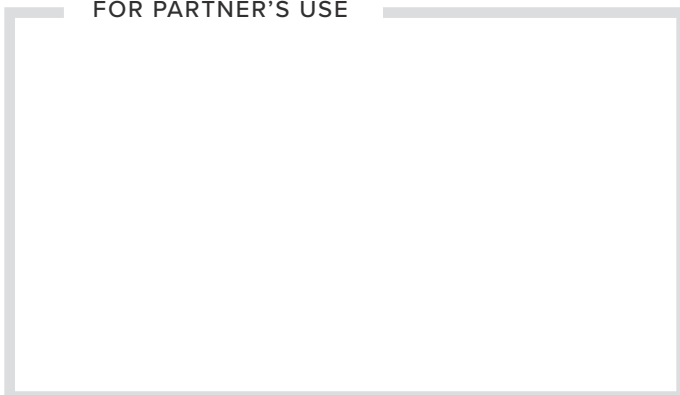

## UPC

