



ClareVue Lighting Appliance and Dimmer Module Integration Notes

Content

Preface...1
Introduction...1
Installing the module...2
Pairing the appliance/dimmer module in ClareHome...2
Pairing and removing the modules in FusionPro...6
Using the module in ClareHome...10
Contact information...11

Last modified: 10/09/20

Preface

For information on Z-Wave and ClareHome, see [Installing Z-Wave with ClareHome.](#)

Notes

- When installing Z-Wave devices, ensure that there is nothing inhibiting their signal. Z-Wave relies on radio signals. Metal or thick walls may limit their signal strength.
- We recommend having 2 or more repeating Z-Wave devices.

Introduction

The ClareVue Lighting Appliance (CL-APS-10) and Dimmer (CL-LDM-10) Modules integrate with ClareHome via the Z-Wave network. Installers only need to pair (add) the unit into ClareHome. The modules provides real time light status indications.

By integrating the ClareVue Lighting Appliance Module or ClareVue Lighting Dimmer Module into the ClareHome control system, your customers can control the associated devices from their Android or iOS devices.

Installing the module

Only qualified installation technicians should install ClareVue lighting devices. Follow the installation and programming instructions that came with your ClareVue lighting devices.


Note: The modules look virtually the same, a user can tell the modules apart by their model numbers. The appliance module has an A in the model number and the dimmer module has a D in the module number.

Pairing the appliance/dimmer module in ClareHome


After installing the appliance/dimmer module, pair it.

To pair the appliance/dimmer module using ClareHome:


1. Tap the ClareHome app's **Devices** page.

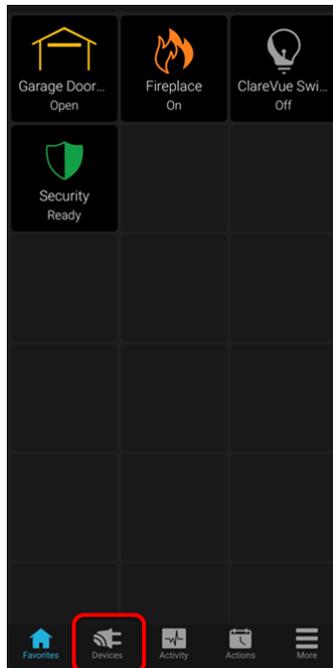


2. Tap **+ Add Device**.

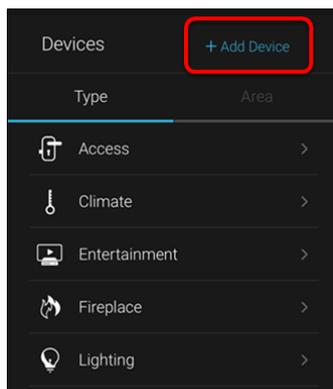


3. Tap **Add Devices**.



4. Select the device category, **Lighting**.

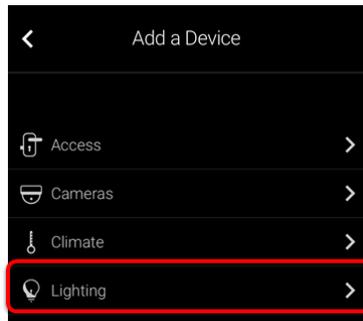


5. Select the device type, **Z-Wave Device - Lighting**.

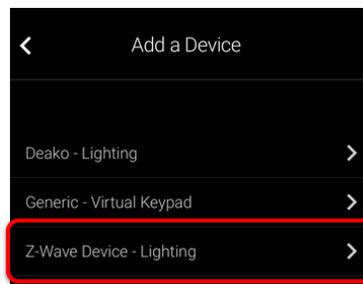

6. Read through the displayed information, and then tap **Add Z-Wave Device**.




7. Read the Z-Wave information, and then tap **Start Discovery Mode**.

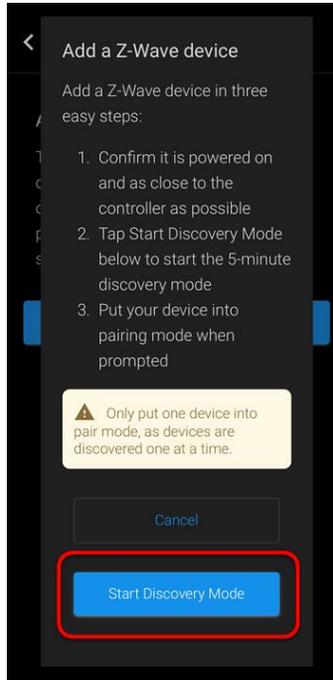

8. When prompted, use the manufacturer's instructions to pair the device.

9. Once paired in, the Edit Device page displays.


Customize the device name and location, tapping **Save** when done.

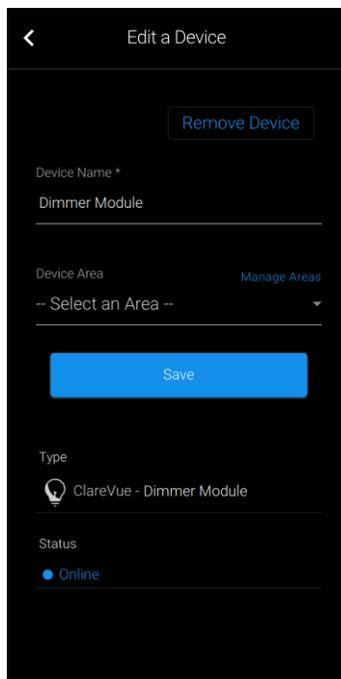


Note: For scenes, notifications, schedules, and automations configuration, see [ClareHome App Guide \(DOC ID 1750\)](#).

To remove the device using ClareHome:


1. Tap the ClareHome app's **Devices** page.

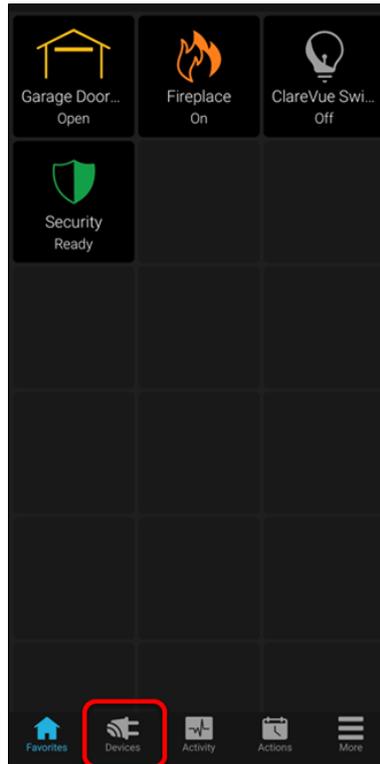

2. Tap **Lighting**.

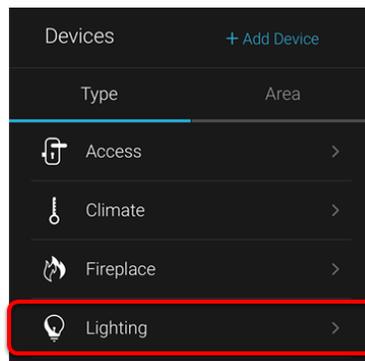

3. Tap the 3 dots next to the dimmer module, and then tap **Remove**.

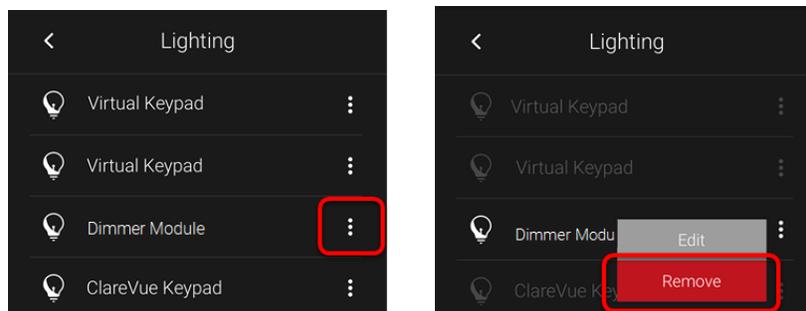

4. Read through the displayed information, and then tap **Start Removal Mode**.



5. Use the manufacturer's instructions for switch removal.


Note: Press and hold the same button used in pairing the device to remove the device.

Pairing and removing the modules in FusionPro


Pair the module to the project.

To add the module in FusionPro:


1. Click **Accounts** in the side menu.

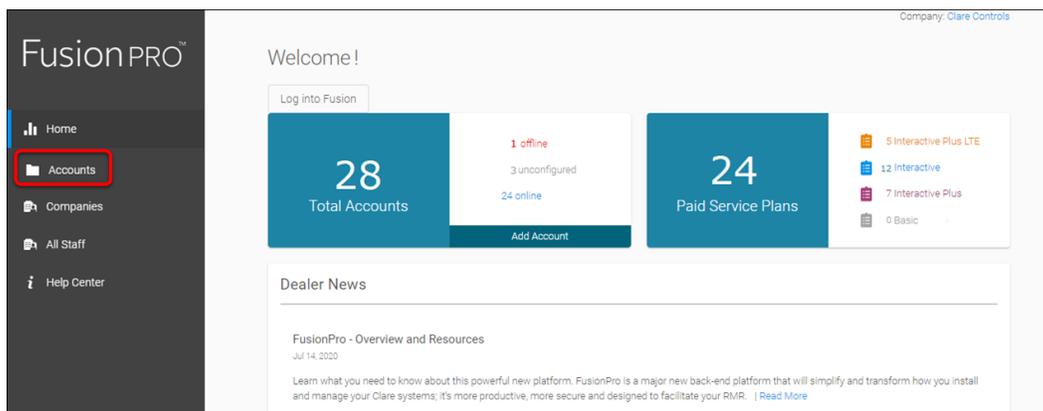


2. Locate the desired account in the list, and then click **View**.
The Account sub-menu is now available.

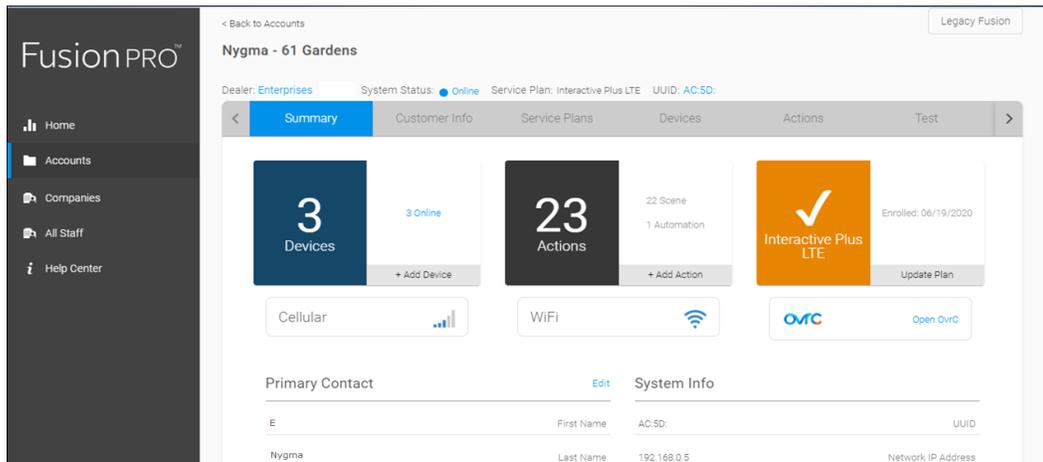


3. Click the **Devices** tab, and then click **Add Devices**.

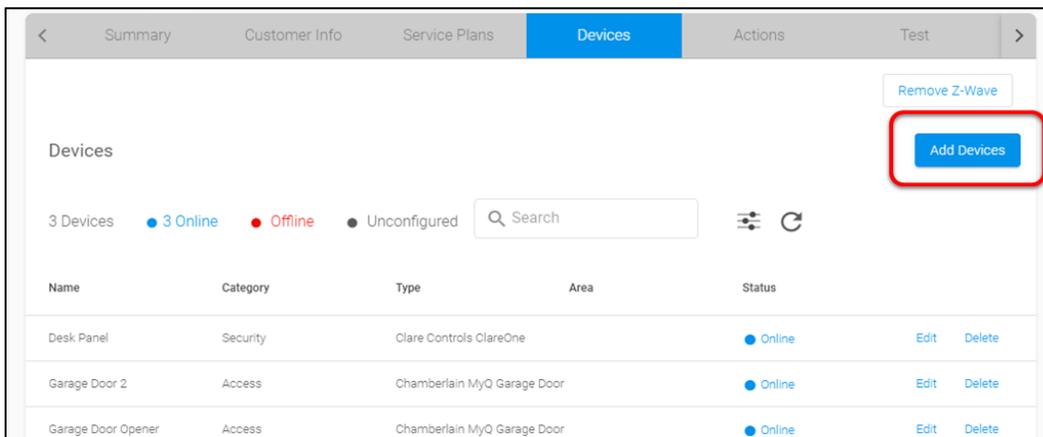


4. Select the device category (**Lighting**) and then the device type (**Z-Wave Device – Lighting**).

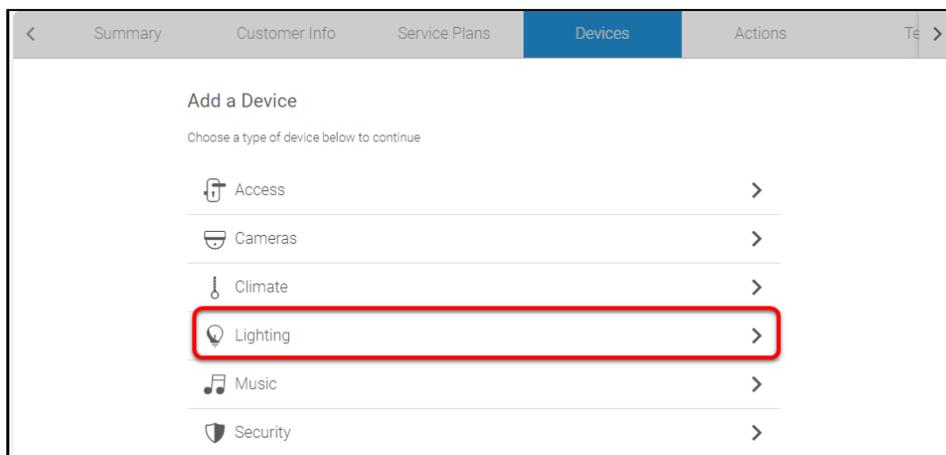


5. Click **Add a Z-Wave Device**, and then click **Start Discovery Mode**.

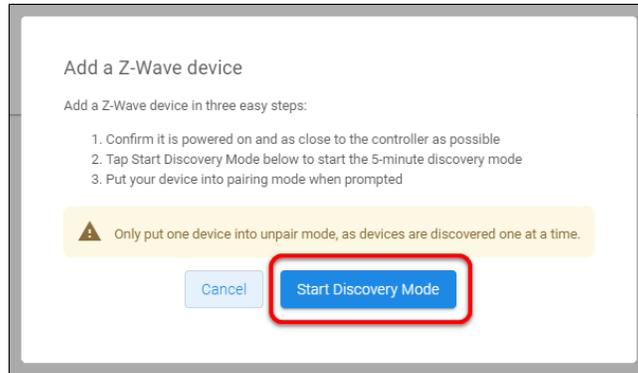

A popup displays waiting for a notification from the device, pair the Z-Wave device according to the manufacturer's instructions for each device.

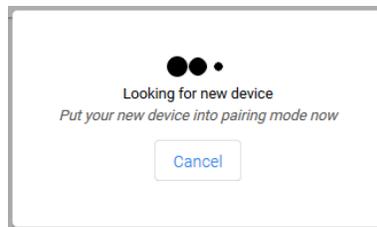


6. Once paired in, the Edit Device page displays.
Customize the device name and location.

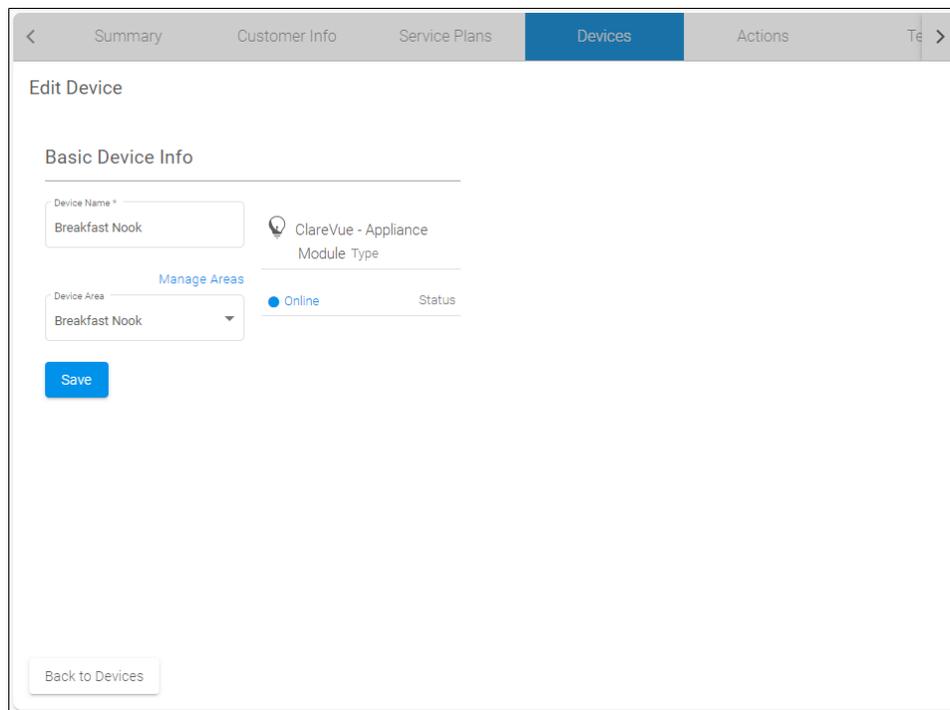

7. Once all desired changes are made, tap **Save**.


To remove the module with FusionPro:

1. Click **Accounts** in the side menu.

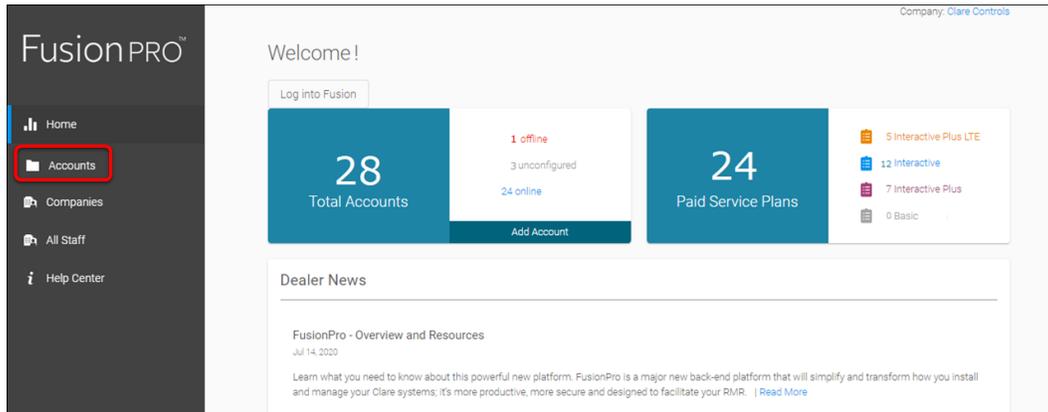


2. Locate the desired account in the list, and then click **View**.


The Account sub-menu is now available.

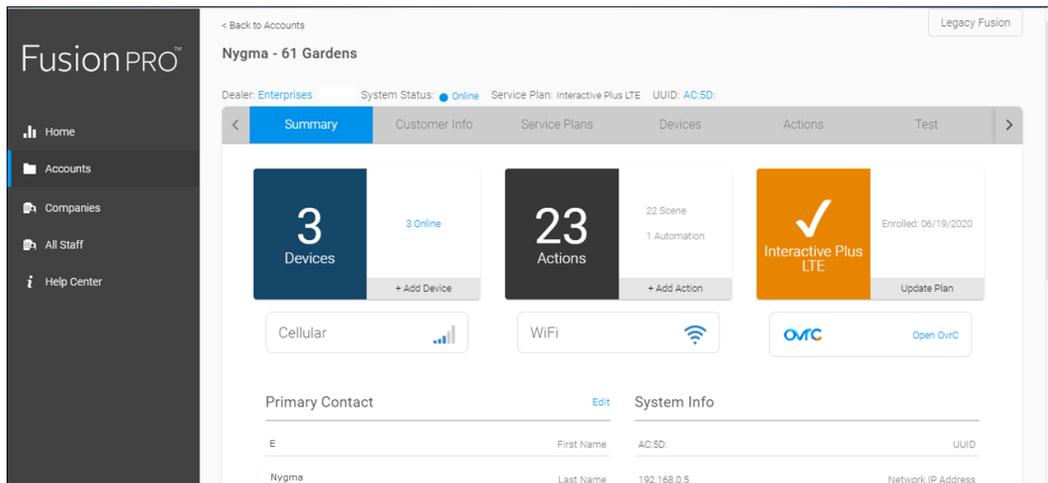

3. Click the **Devices** tab, and then click **Remove Z-Wave**.

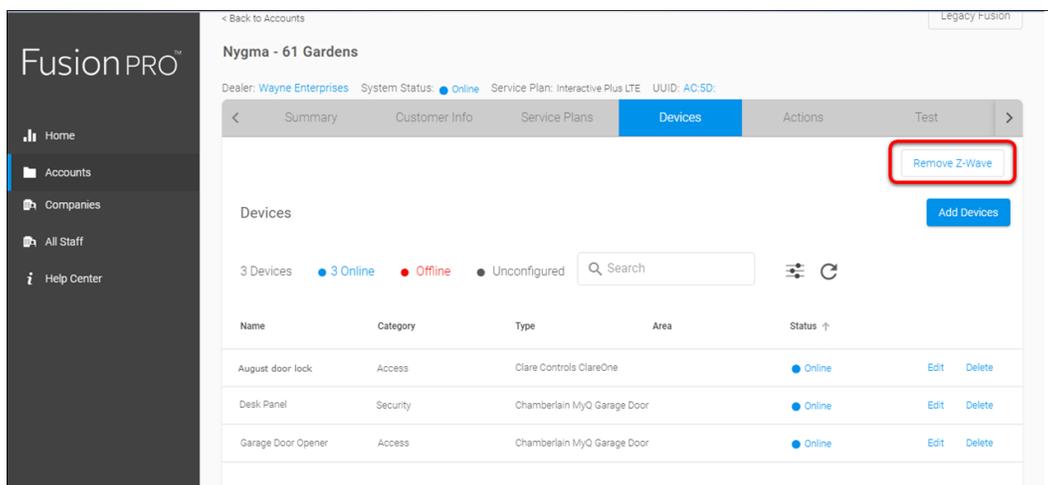

4. Click **Start Removal Mode**.

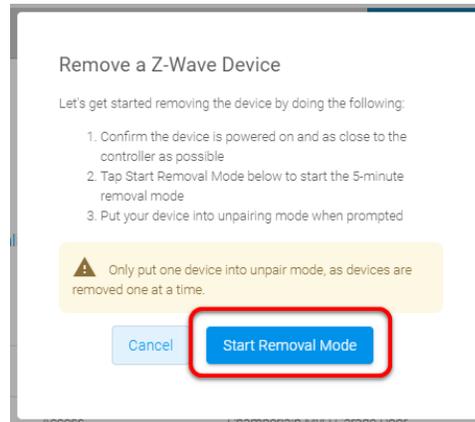

5. Use the manufacturer's instructions for device removal.

Using the module in ClareHome

Once added, the user can add the device to their favorites page.

Figure 1: Appliance module on and off


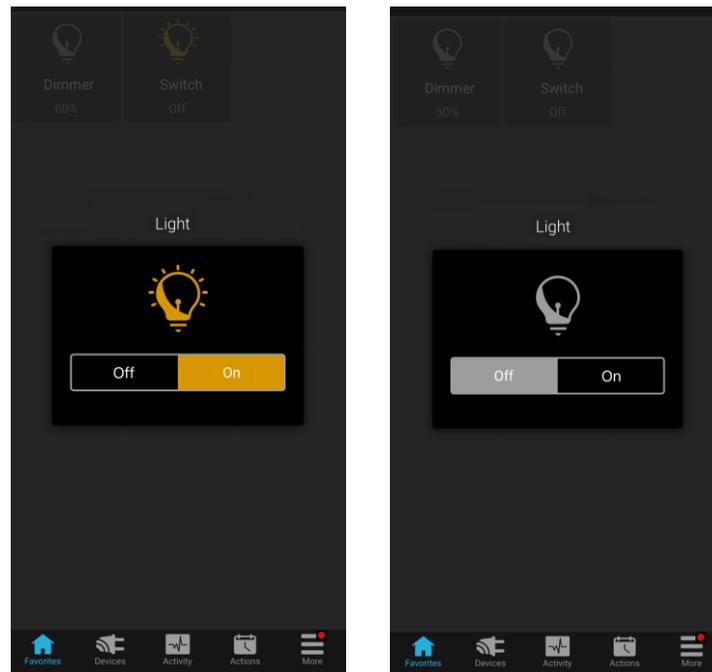


Figure 2: Dimmer module at 60% and off

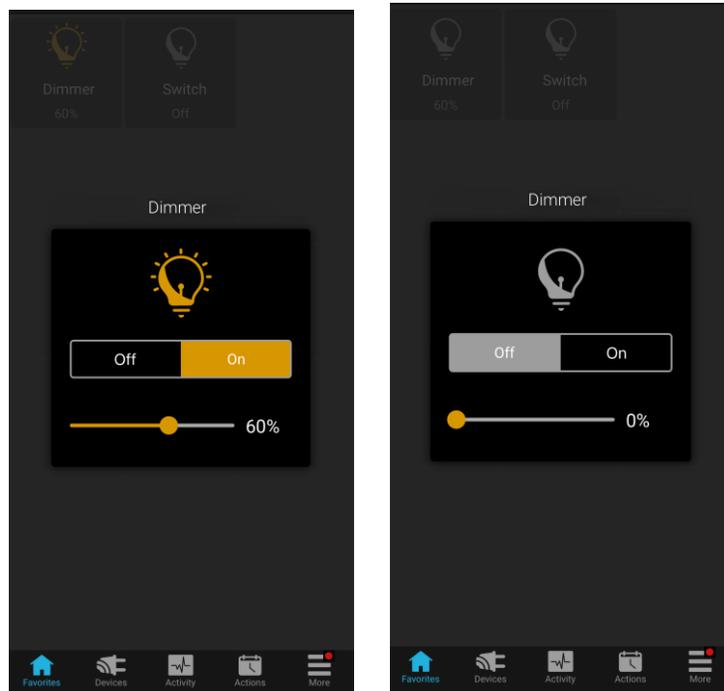

Contact information

Clare Controls, LLC.
7519 Pennsylvania Ave, Suite 104
Sarasota, FL 34243

General: 941.328.3991
Fax: 941.870.9646
www.clarecontrols.com

Integrator/Dealer Support: 941.404.1072
claresupport@clarecontrols.com

Homeowner Support (ClareCare): 941.315.2273 (CARE)
help@clarecontrols.com