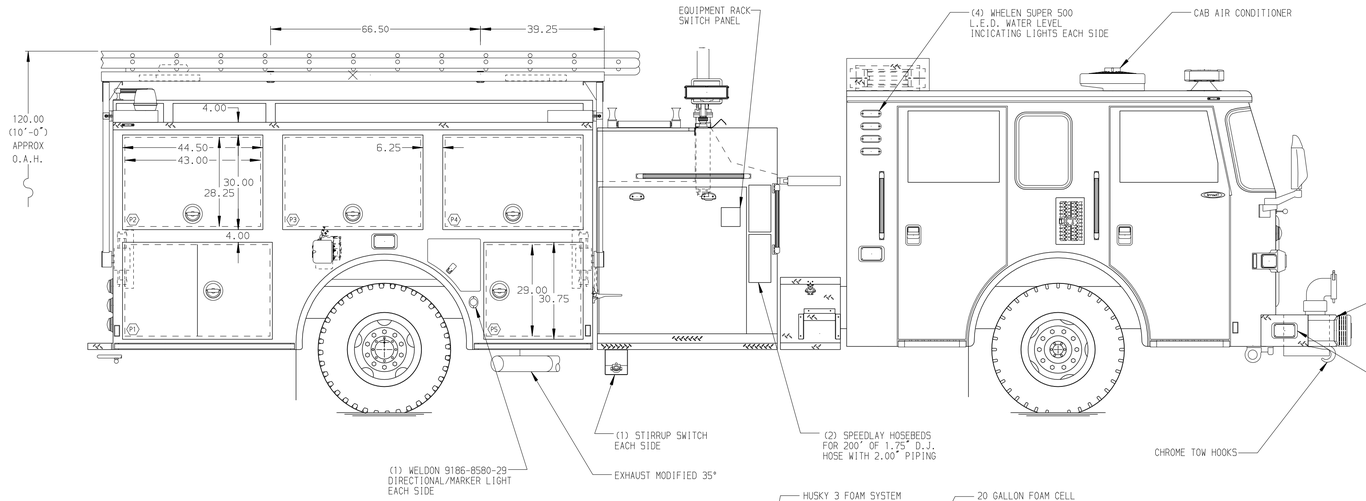

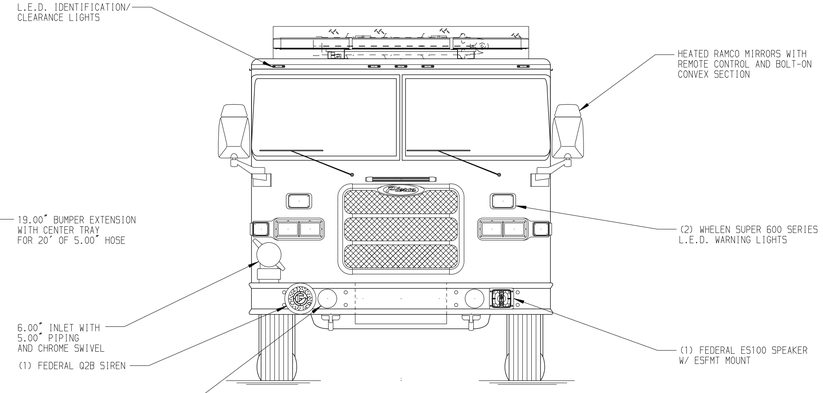

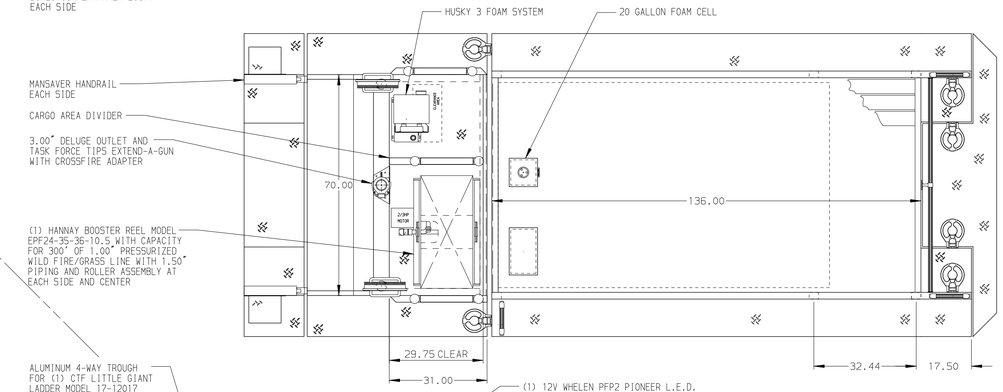

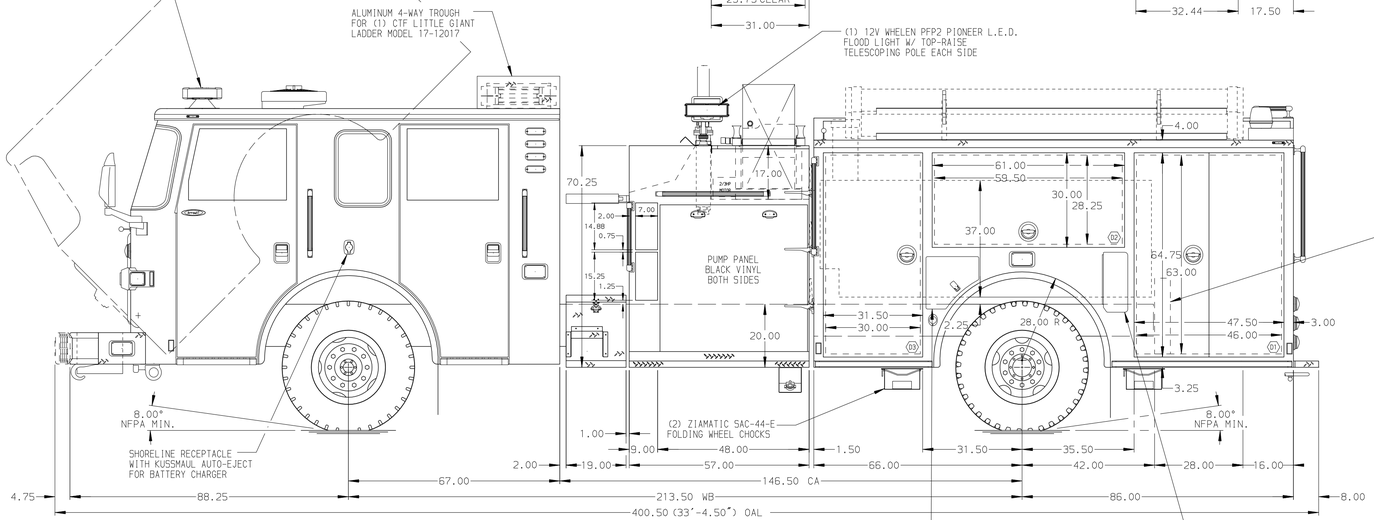

HOSEBED CAPACITIES

1. 200' OF 1.75" D.J. POLYESTER HOSE
2. 1000' OF 2.50" D.J. POLYESTER HOSE
3. 1000' OF 5.00" D.J. POLYESTER HOSE

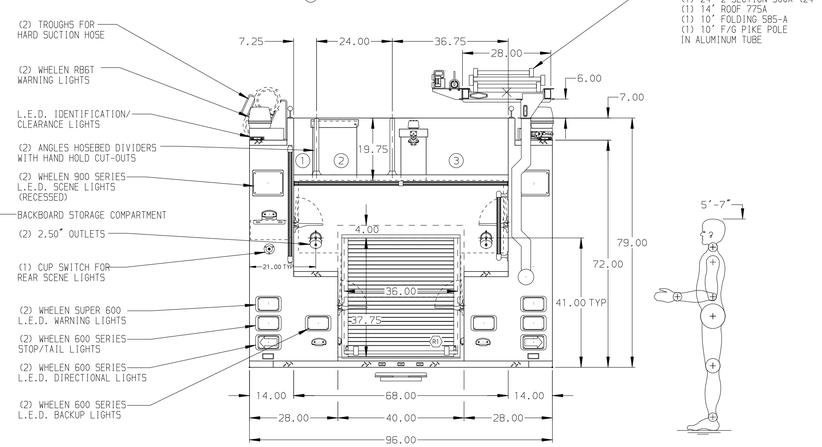

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
2. S/STL SCUFFPLATE ON REAR OUTER CORNERS OF CAB
3. S/STL SCUFFPLATE ON REAR INNER & OUTER CORNER OF BODY
4. S/STL SCUFFPLATE ON BOTTOM EDGE OF DOOR FRAMING OF ALL SIDE BODY COMPARTMENTS
5. BOLT-IN PARTITION WITH CUT-OUT BETWEEN COMPARTMENTS P1 & R1
6. DRI-DECK MATTING LOCATED IN EACH ADJUSTABLE SHELF
7. ONE ADJUSTABLE SHELF IN COMPARTMENTS D1, P1, P5 & R1; TWO IN D3
8. NO VERTICAL PARTITIONS BETWEEN COMPARTMENTS P2 & P3 AND P3 & P4
9. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
10. MOUNTING BASES FOR ANTENNAS LOCATED PER SHOP ORDER
11. BATTERY CHARGER LOCATED IN CAB BEHIND DRIVER'S SEAT
12. AIR INLET WITH DISCONNECT COUPLING LOCATED IN DRIVER'S SIDE STEP WELL
13. AMDOR L.E.D. STRIP LIGHT ON EACH SIDE OF EACH BODY COMPARTMENT DOOR
14. S/STL FENDER CROWNS FRONT AND REAR
15. PIERCE LOGO MUDFLAPS FRONT AND REAR
16. BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH A MOUNTING BRACKET
17. VOGEL LUBE SYSTEM LOCATED ON PS PUMP PANEL
18. ONE 120V 4-PLACE RECEPTACLE LOCATED IN CAB
19. DRI-DECK MATTING WITH BEVEL ON FLOOR OF EACH BODY COMPARTMENT
20. CAB LIFT CONTROLS LOCATED ON DS PUMP PANEL
21. SHELF TRACKS LOCATED IN COMPARTMENTS D1, D3, P1, PS, & R1

REV	DATE	BY	CH
▽	18APR16	COL	MSA
▽	18MAR16	COL	MSA

CHASSIS DATA
MAKE: PIERCE
MODEL: ARROW XT

Pierce MANUFACTURING INC.

TITLE: 1500-D-750 GAL POLY W/20 GAL FOAM CELL, 152" FDLER (2)SPEEDLAYS, DELUGE, BOOSTER REEL, HYD. LADDER RACK
FOR: NORTH ADA COUNTY FIRE & RESCUE GARDEN CITY, IDAHO
DWG NO. 29772AD

JOB NO.	29772
SCALE 1:24	DATE
DRAWN BY COL	27JAN16
CHECKED BY SMA	27JAN16
SHEET SIZE D	SHEET NO. 1 OF 1

View File Created 18-APR-2016 11:23:51