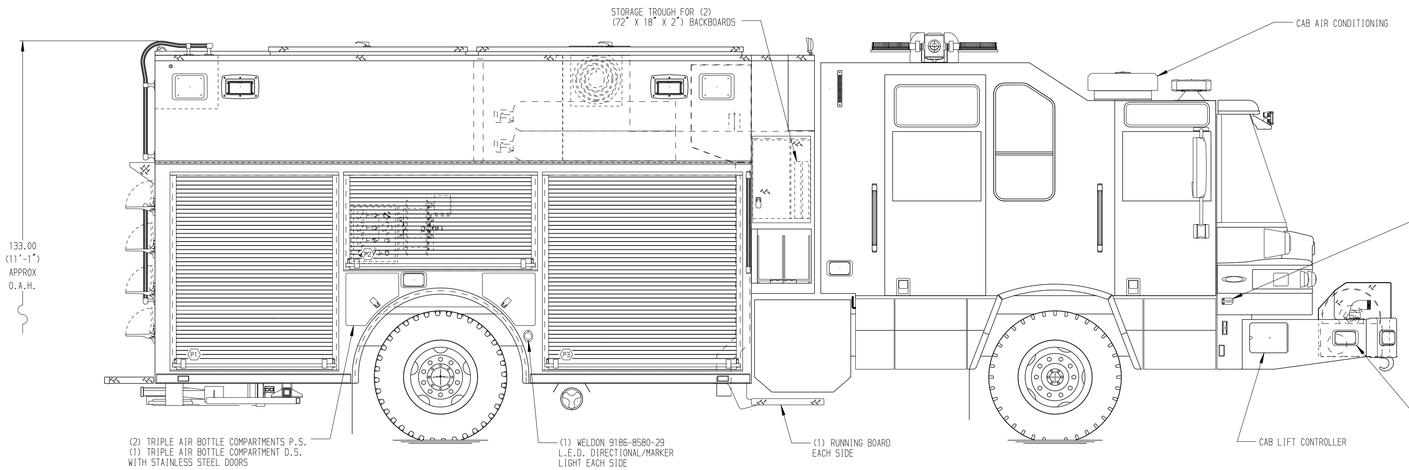

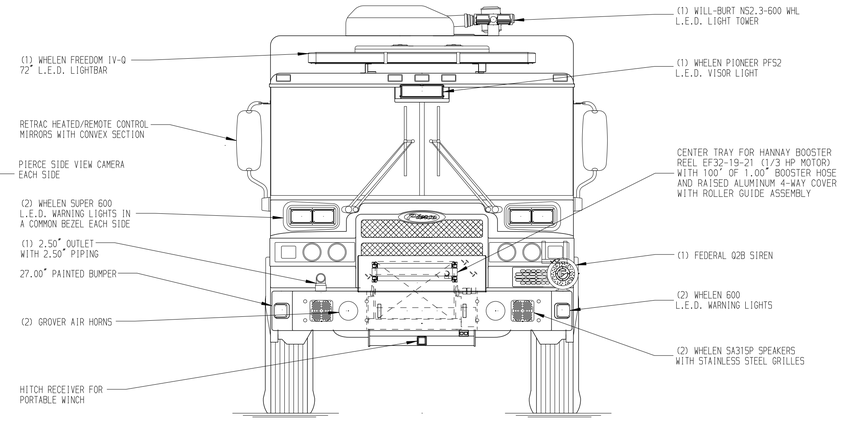

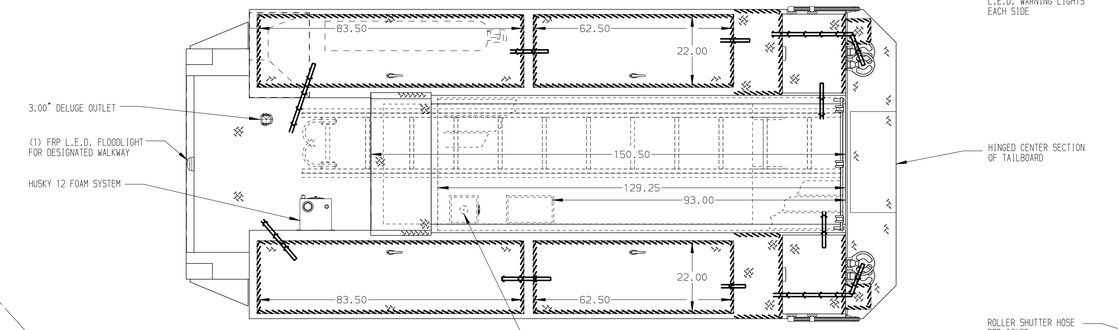

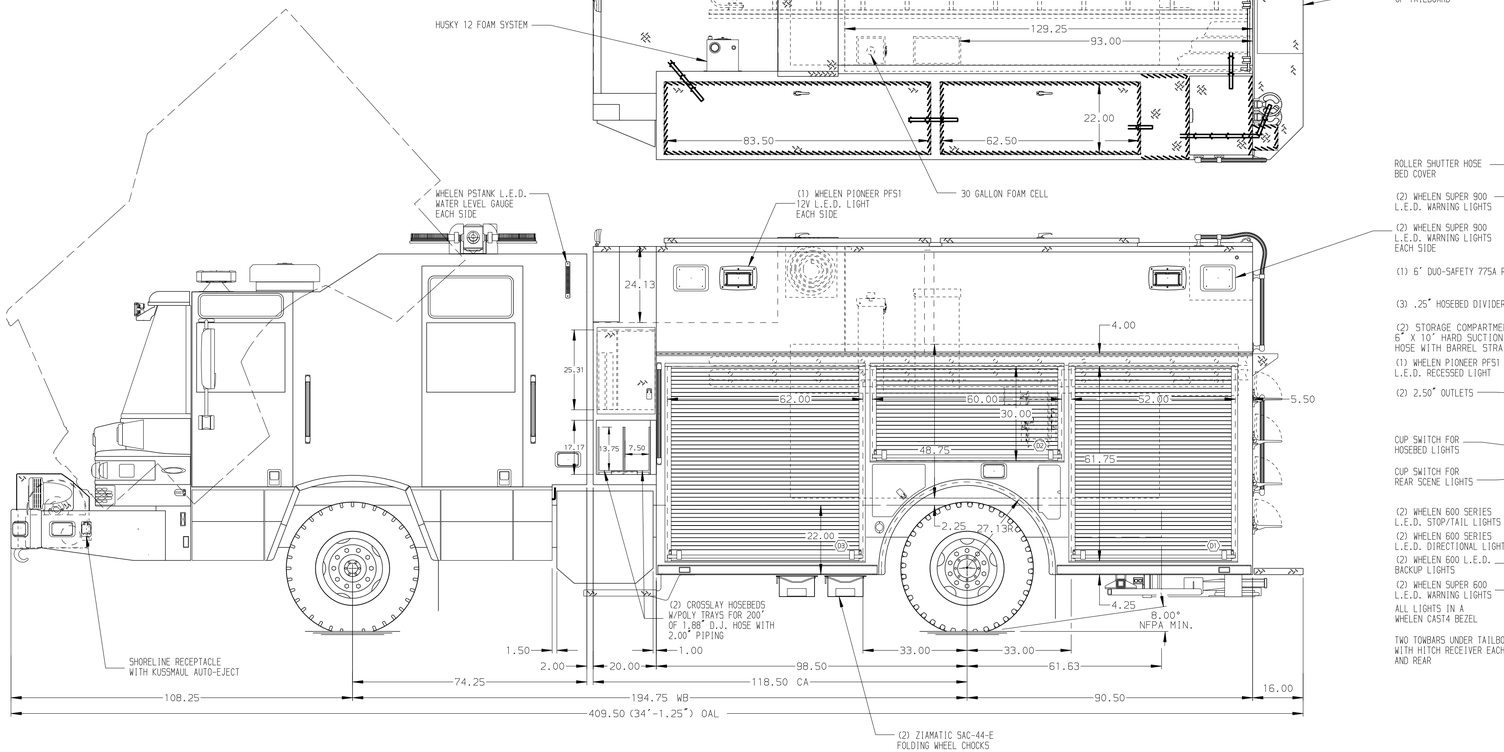

HOSEBED CAPACITIES

1. 200' OF 2.50" D.J. HOSE
2. STORAGE FOR 6' ROOF LADDER
3. 900' OF 5.00" D.J. HOSE
4. 200' OF 2.50" D.J. HOSE

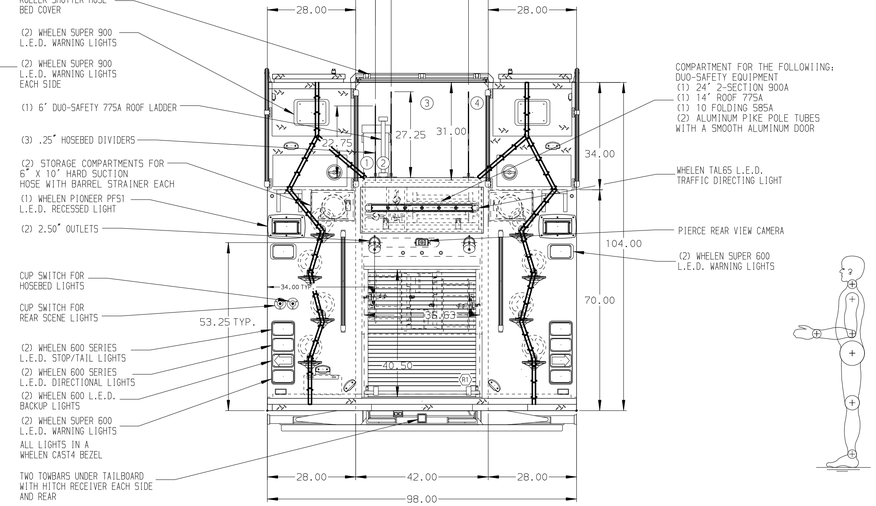

ALUMINUM BODY

FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN COMPARTMENT D3
2. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. ONE FULL WIDTH ADJUSTABLE SLIDE-OUT TRAY LOCATED IN COMPARTMENT P3
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS D1,P1,P3,R1
6. TWO ADJUSTABLE FULL WIDTH/FULL DEPTH SHELVES IN COMPARTMENT D1,P3
7. TWO SLIDE-OUT TOOL BOARDS WITH PEGBOARD PATTERN IN COMPARTMENTS D3,P3
8. ONE VERTICAL PARTITION IN COMPARTMENT D1,P1,P3
9. CONTROL PANEL FOR LOW PRESSURE TOOL SYSTEM IN COMPARTMENT P2
10. ONE PERMANENT SHELF LOCATED IN COMPARTMENTS D3,P1
11. TWO HANNAY MODEL 2016-17-18 HYDRAULIC REELS LOCATED IN COMPARTMENT R1 WITH A CAPACITY FOR 100' OF 0.25" DUAL HOSE
12. AIR INLET WITH DISCONNECT COUPLING ON D.S. PUMP PANEL
13. ONE ELECTRIC REWIND HIGH PRESSURE AIR REEL (EFH1514-17-18) WITH CAPACITY FOR 200' OF 0.51"I.D. HOSE LOCATED IN COMPARTMENTS D2,P2

REV	DATE	BY	CH
3	25MAY17	JWO	JGO
2	21APR17	JWO	JGO
1	09FEB17	JWO	KBO

CHASSIS DATA
MAKE: PIERCE
MODEL: QUANTUM

Pierce MANUFACTURING INC.

TITLE: 1500-D-500P W/30G FOAM,189",FULL HEIGHT,FULL DEPTH (2) X-LAYS,DELUGE,REELS,LIGHT TOWER,CASCADE AIR
FOR: ST. JOHNS COUNTY ST. AUGUSTINE, FLORIDA
DWG NO. 30835AD

JOB NO. 30835
SCALE 1:24
DATE
DRAWN BY JWO 02FEB17
CHECKED BY KBO 03FEB17
SHEET SIZE D
SHEET NO. 1 OF 1

View File Created 31-MAY-2017 07:05:53