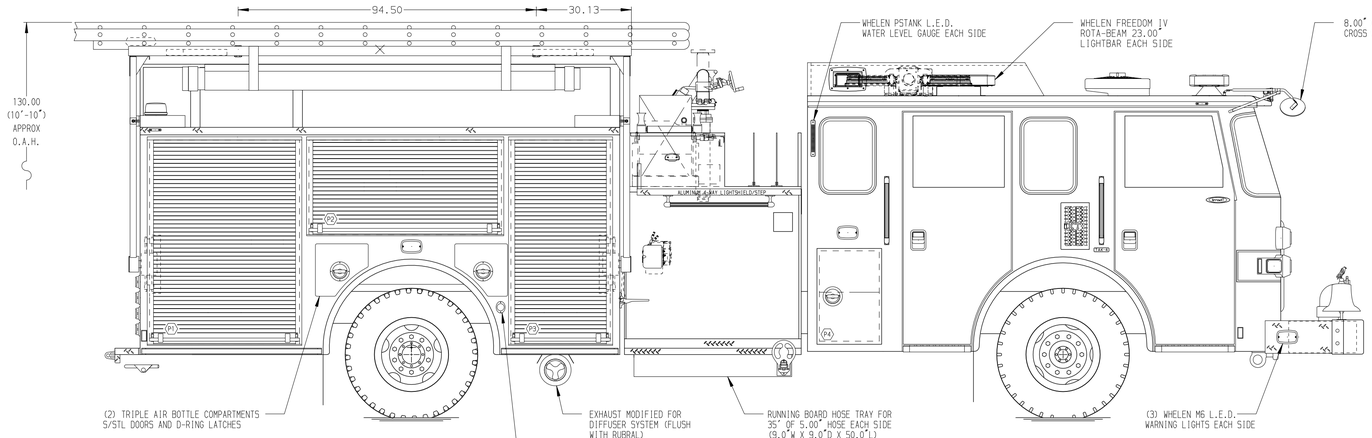

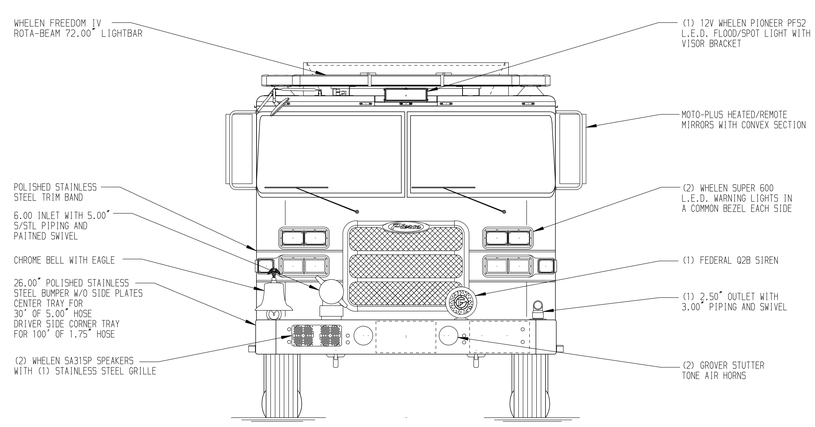

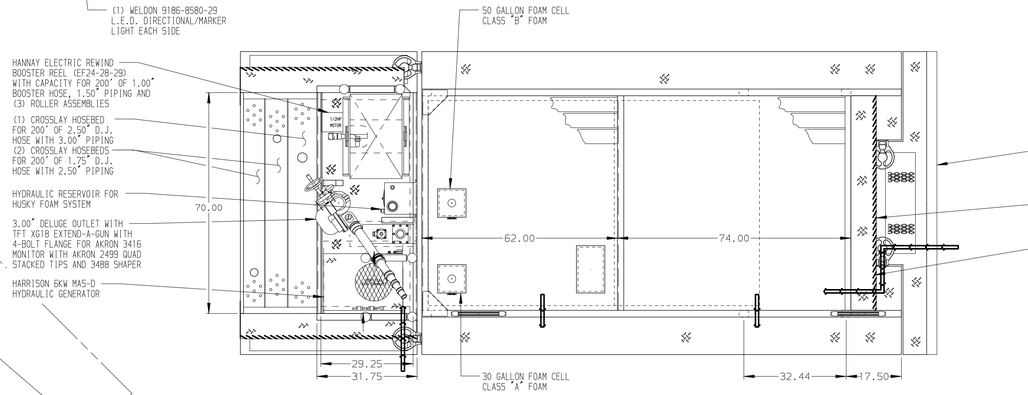

HOSEBED CAPACITIES

1. 300' OF 1.75" D.J. HOSE (TOP)
   200' OF 2.50" D.J. HOSE (BOTTOM)
2. 1000' OF 5.00" SNAP-TITE TPX HOSE
3. 500' OF 3.00" D.J. HOSE
4. 400' OF 2.50" D.J. HOSE

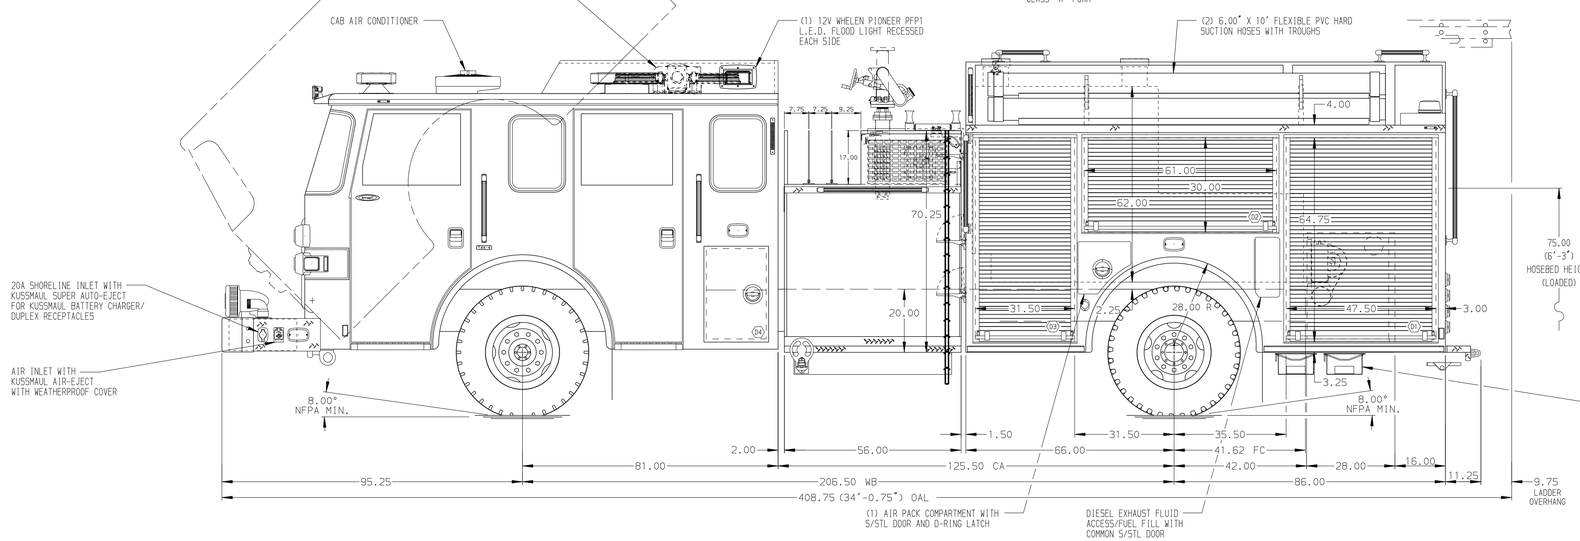

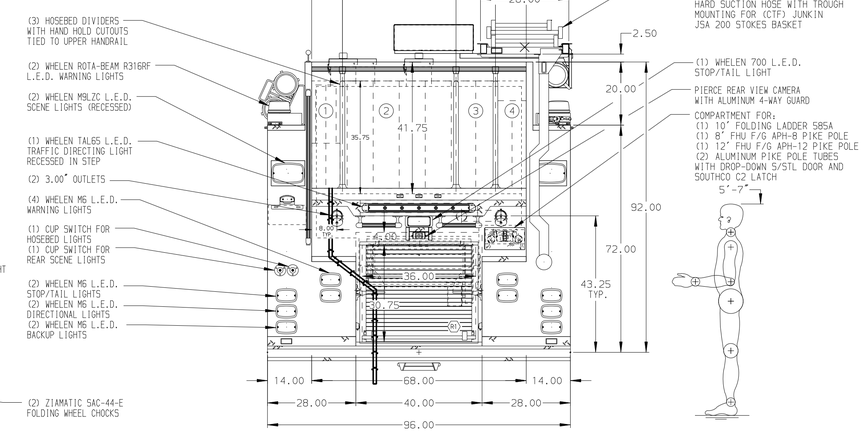

ALUMINUM BODY | MAXIMUM O.A.L. 413.00" | MAXIMUM O.A.H. 130.00" | SIDE ROLL PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ALUMINUM 4-WAY ON CAB ROOF
2. KUSSMAUL 1200 BATTERY CHARGER LOCATED IN D.S. EMS CABINET
3. BATTERY CHARGER INDICATOR LOCATED NEAR D.S. SEAT RISER WITH BRACKET
4. ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH SPECIAL SIDES IN COMPARTMENT D1
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH 2.00" SIDES IN COMPARTMENTS P1 & R1
6. PARTITION BETWEEN COMPARTMENTS D1/R1 AND P1/R1
7. MARINE GRADE PLYWOOD ON THE BACK WALL IN COMPARTMENTS D1 & D3
8. TWO 6' FIRE HOOKS UNLIMITED RH-6 PIKE POLES SHIPPED LOOSE
9. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
10. ONE ADJUSTBLE SLIDE-OUT TRAY WITH 4.00" SIDES IN COMPARTMENTS D3 & P3
11. AKRON ELECTRIC REWIND CABLE REEL ERWC-10-2B IN COMPARTMENT R1 WITH 200' OF 10/4 CABLE, CIRCLE-D JUNCTION BOX AND ALUM 4-WAY HOLDER
12. ONE 120V DUPLEX RECEPTACLE IN COMPARTMENTS D1, P1 AND EMS CABINET
13. ONE ADJUSTABLE FULL WIDTH/DEPTH SHELF IN COMPARTMENT D2; TWO IN D3, P1 & P3

REV	DATE	BY	CH
V	30MAY17	NPA	DTS
V	17APR17	NPA	DTS
V	23MAR17	NPA	CSH

CHASSIS DATA
MAKE: PIERCE
MODEL: ARROW XT

Pierce MANUFACTURING INC.

TITLE: 2000-D-1000P, 920G WATER-50G & 30G FOAM, 152" BODY (3) XLAYS, HYD LADDER RACK, DELUGE, BOOSTER REEL
FOR: EAST BRUNSWICK FIRE DISTRICT #1
EAST BRUNSWICK, NEW JERSEY

DWG NO. 31094AD

JOB NO.	31094
SCALE	1:24
DATE	
DRAWN BY	NPA 16MAR17
CHECKED BY	CCA 16MAR17
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 30-MAY-2017 08:14:14