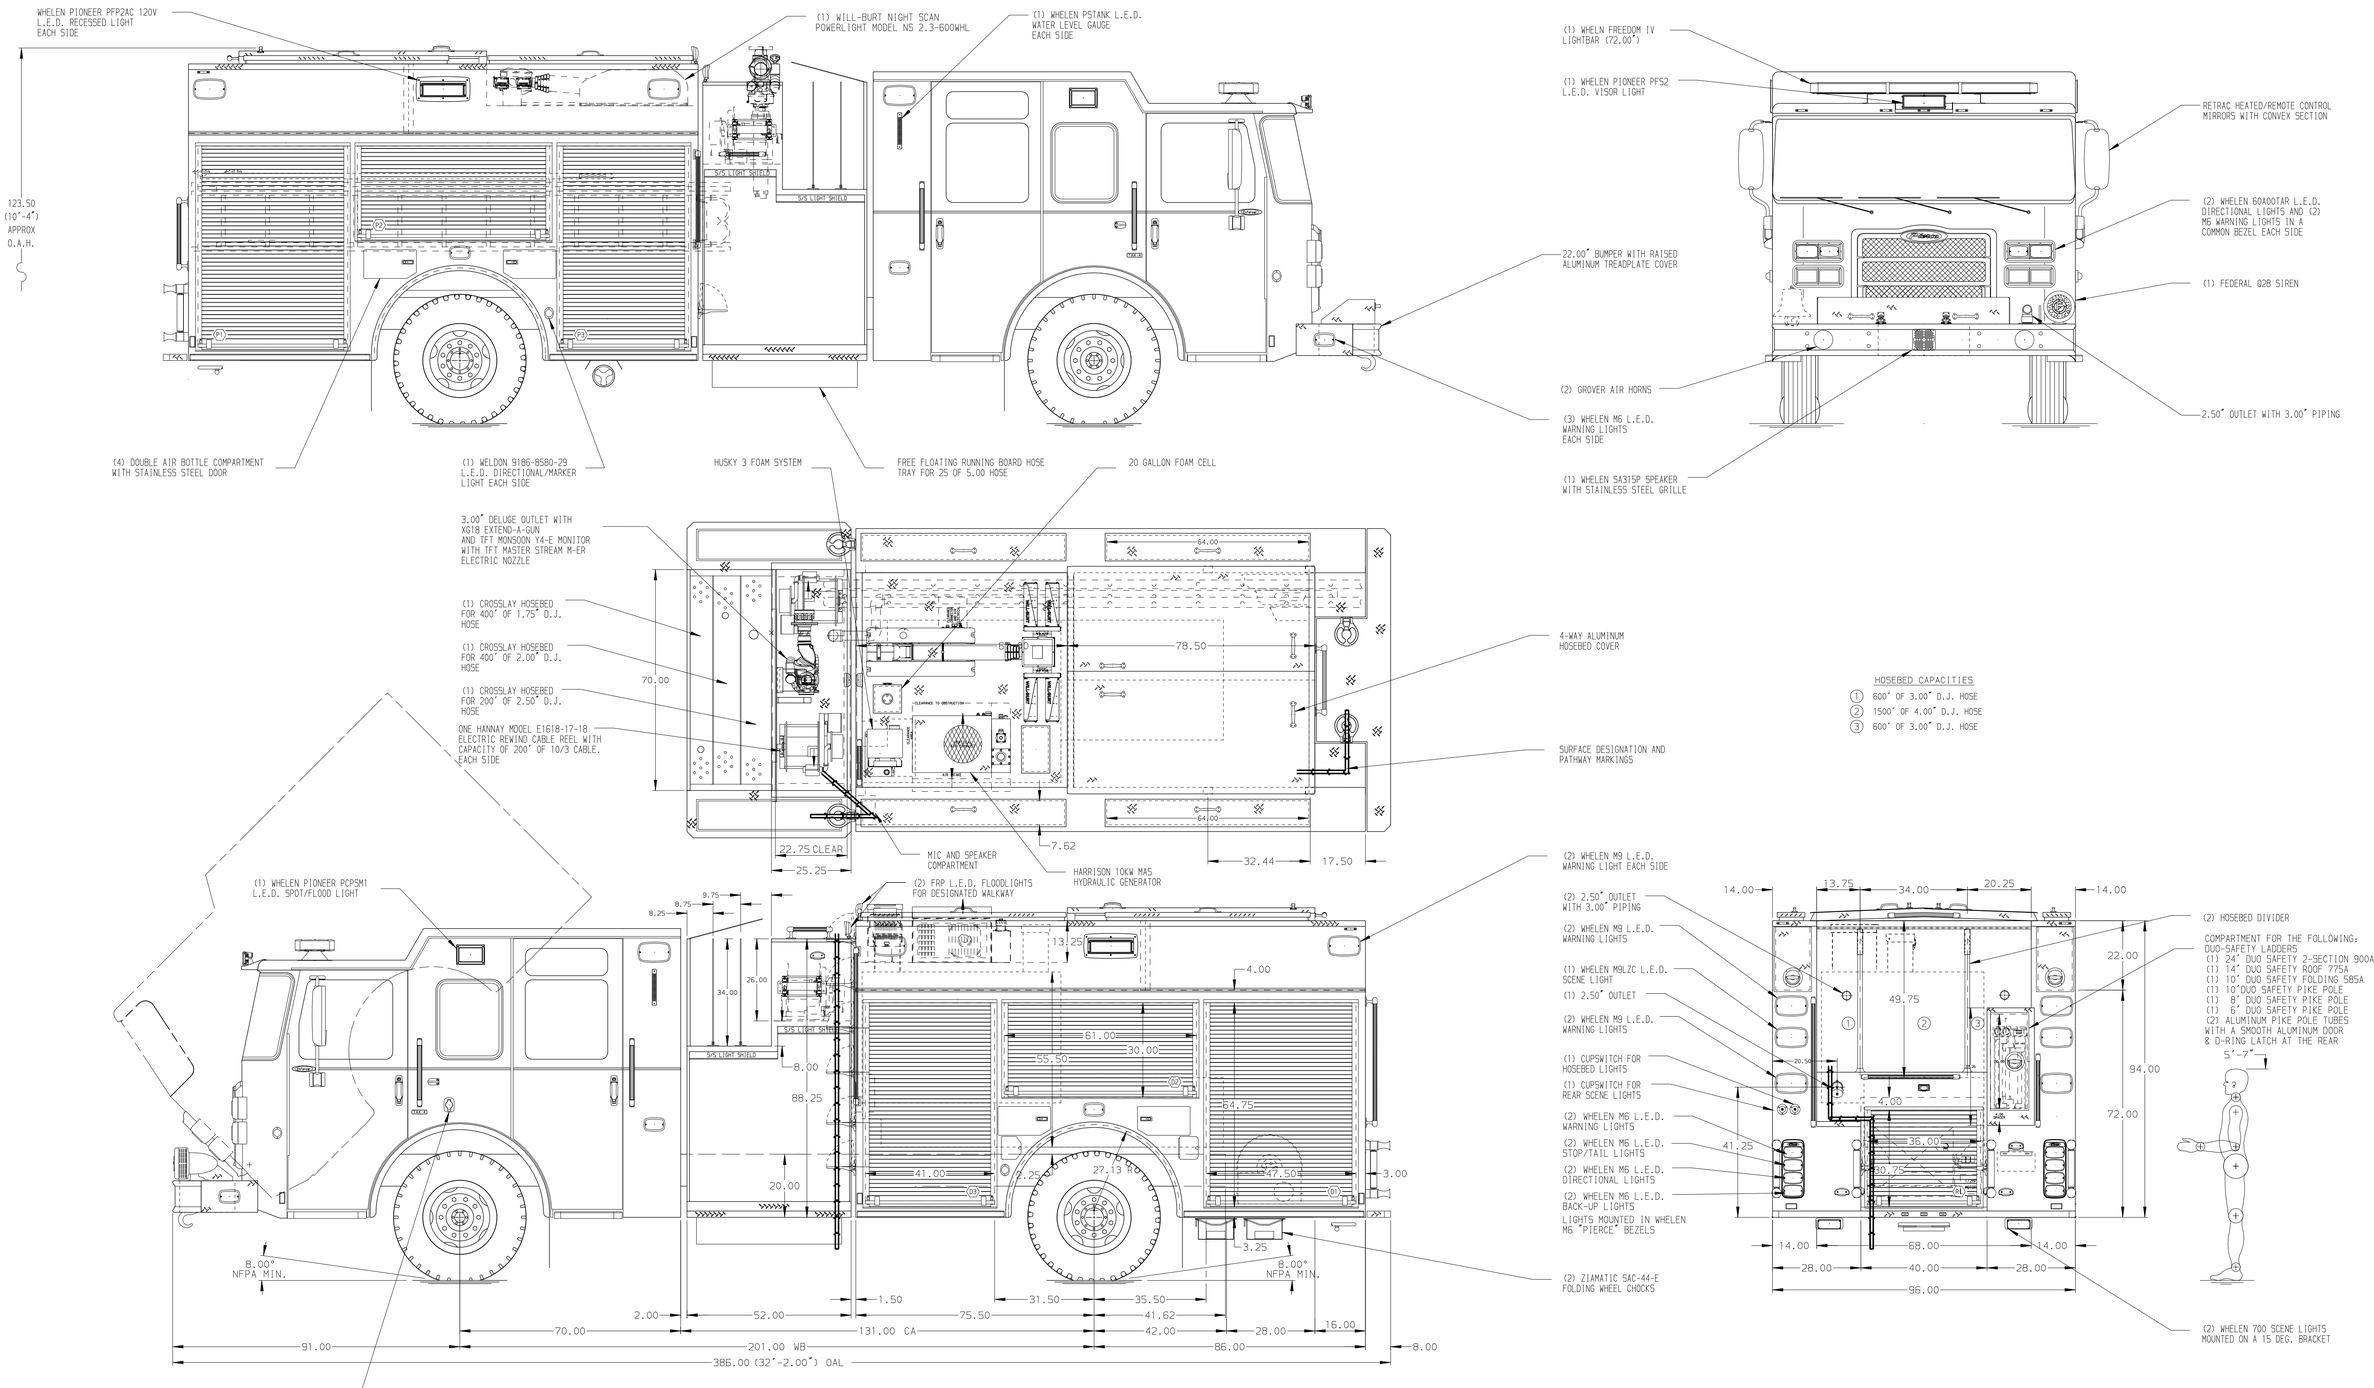


HOSEBED CAPACITIES

1. 600' OF 3.00" D.J. HOSE
2. 1500' OF 4.00" D.J. HOSE
3. 600' OF 3.00" D.J. HOSE

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN COMPARTMENT D3
2. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. CABLE RELEASE LATCH WITH SINGLE HAND OPERATION FOR TRAY IN COMPARTMENT P3
5. ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENT P3
6. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT P3
7. SLIDE-OUT FLOOR MOUNTED OIL DRY HOPPER IN COMPARTMENT P1
8. ALUMINUM PEGBOARD WITH TRACKS ON THE REAR WALL OF COMPARTMENT D1 & D3
9. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
11. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF LOCATED IN COMPARTMENT D1, D2, D3, P1, P2, & P3
12. AIR INLET WITH DISCONNECT COUPLING LOCATED ON DS PUMP PANEL
13. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON DS PUMP PANEL
14. ONE ELECTRIC REWIND HANNAY BOOSTER HOSE REEL MODEL EF32-21-22 FOR 200' OF 1.00" BOOSTER HOSE IN COMPARTMENT R1
15. FLOOR MOUNTED STORAGE RACK FOR EXTINGUISHER IN COMPARTMENT D1

| REV | DATE | BY | CH |
|---|---|---|---|
| D | 13SEP17 | MMF | GHO |
| C | 11AUG17 | MMF | GHO |
| B | 23JUN17 | MMF | CSH |

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

TITLE: 1500-D-750P, 730 GAL WATER/20 GAL FOAM, 161" PUMPER BODY, (3) XLAYS, LADRS BWT TANK & S/SHT, GENERATOR
FOR: COLONIE FIRE COMPANY, ALBANY, NEW YORK
DWG NO. 31345AD

Pierce MANUFACTURING INC.

| JOB NO. | 31345 |
|---|---|
| SCALE | DATE |
| 1:24 | |
| DRAWN BY | 19JUN17 |
| MMF | |
| CHECKED BY | 19JUN17 |
| CSH | |
| SHEET SIZE | SHEET NO. |
| D | 1 OF 1 |

View File Created 19-SEP-2017 06:55:10