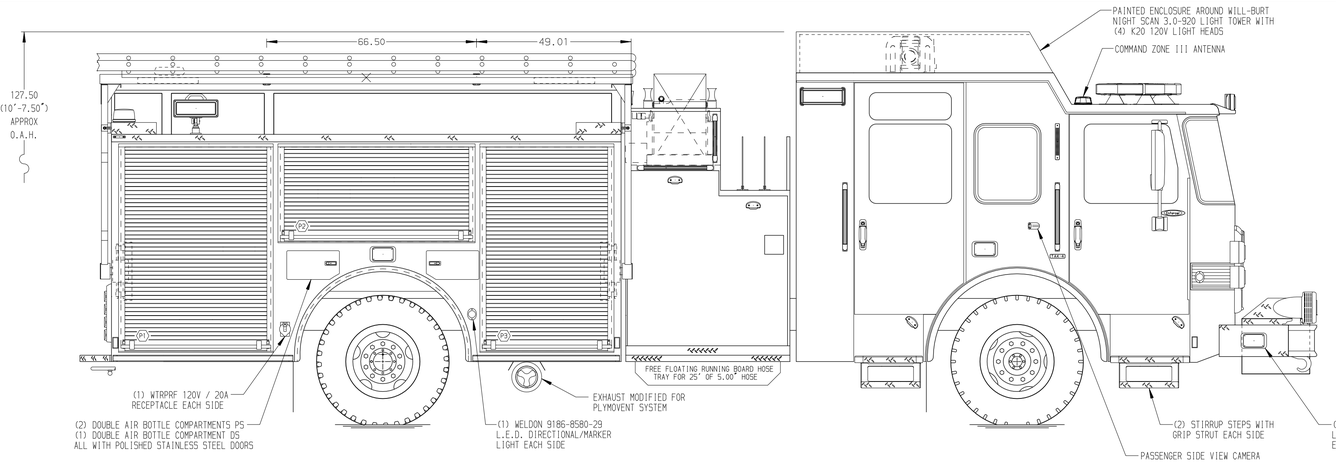

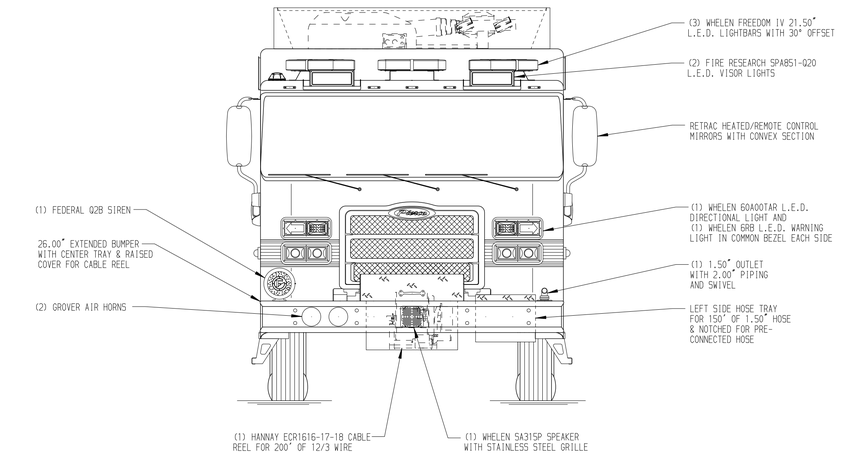

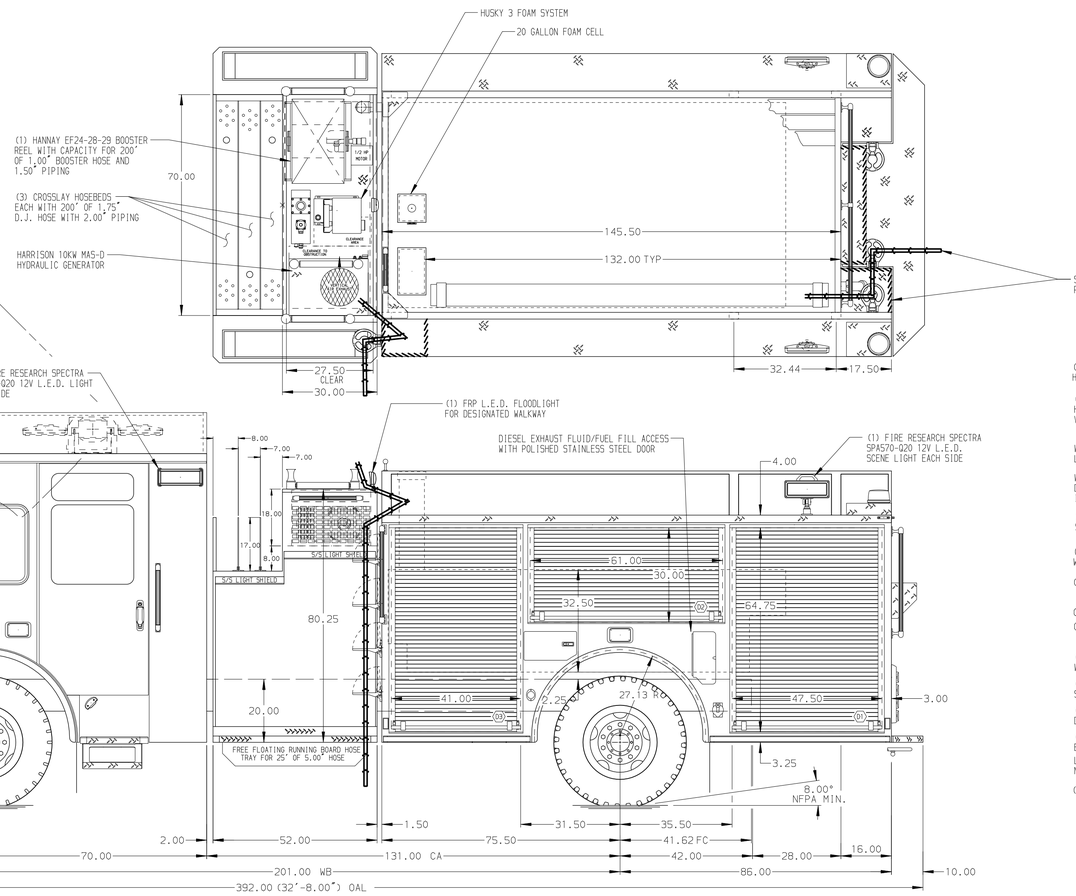

HOSEBED CAPACITIES

1. -1000' OF 5.00" L.D.H.
2. - 200' OF 1.75" D.J. HOSE
3. - 300' OF 2.50" D.J. HOSE
4. - 300' OF 2.50" D.J. HOSE

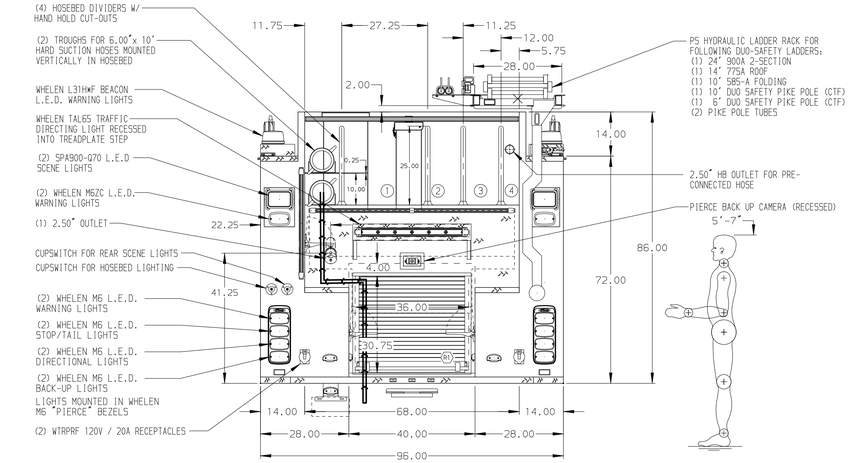

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. WHEEL CHOCKS AND MOUNTING BRACKETS PROVIDED BY DEALER
2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
3. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
4. SCUFFPLATES ON CENTER EXTERIOR SURFACE OF THE REAR WALL
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS D1, P1, & P3
6. TWO SLIDE-OUT ALUMINUM TOOL BOARDS IN COMPARTMENT D3
7. PARTITION BETWEEN COMPARTMENTS D1/R1 AND P1/R1
8. MIC AND SPEAKER COMPARTMENT LOCATED ON DRIVER'S SIDE PUMP PANEL
9. CIRCUIT BREAKER PANEL IN COMPARTMENT D3, HIGH ON FORWARD WALL
10. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
11. AUXILIARY HOWLER SIREN SKEAPER SYSTEM UNDER PS CAB
12. MIC & SPEAKER TO BE LOCATED ON OPERATORS PANEL WITH PLAIN DOOR
13. ONE 20A / 120V RECEPTACLE TO BE LOCATED IN ALL SIDE COMPARTMENTS
14. TWO ADJUSTABLE SHELVES IN COMPARTMENTS D1 & P3, ONE IN P1

REV	DATE	BY	CH
V	22NOV17	GVH	MSA
V	27OCT17	GVH	MSA
V	27SEP17	GVH	CSH

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: 1500-D-750P, 730G WATER, 20G FOAM, 161" FH BODY (3) CROSSLAYS, BOOSTER REEL, CABLE REEL, GENERATOR
FOR: LAURELTON FIRE DEPARTMENT ROCHESTER, NEW YORK
DWG NO.: 31658AD

JOB NO.	31658
SCALE	1:24
DATE	
DRAWN BY	GVH 25SEP17
CHECKED BY	CSH 26SEP17
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 27-NOV-2017 07:05:25