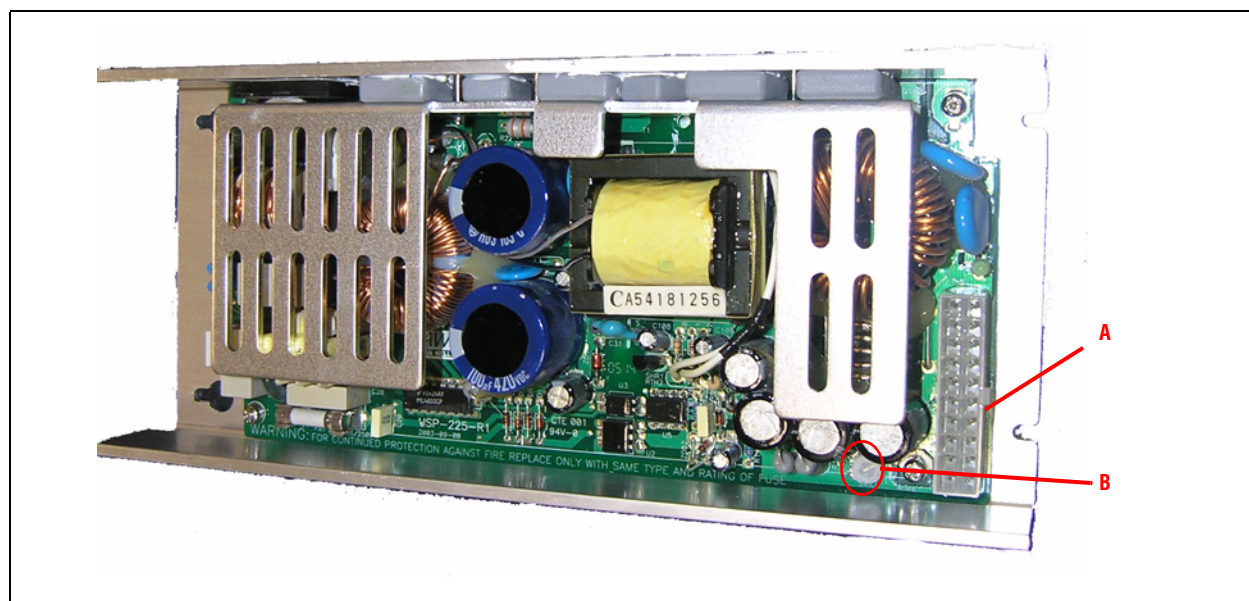


5V and 7.5V Power Supply (pn 1179950301/1179950201)

1.1 Description


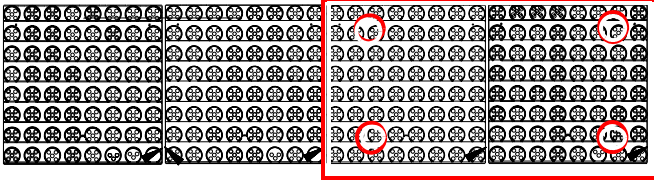


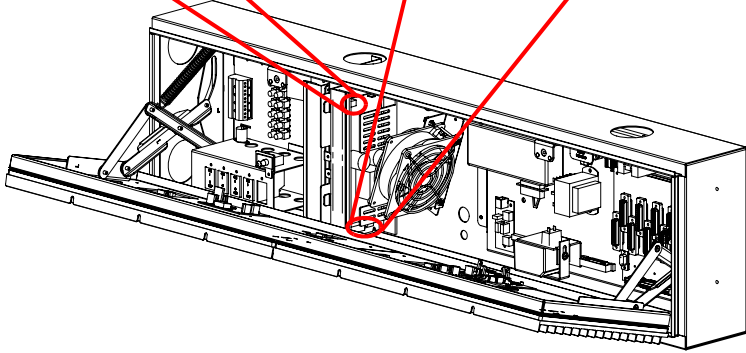
Two types of power supplies are used in AlphaEclipse StreetSmart version 35X and 17X signs: 5V (pn117950301) and 7.5V (pn 1179950201). Both of these power supplies provide power to LED driver boards, boost regulator (if present), and controller (if present). A sign section contains one or two power supplies of the same voltage. (There can be two 5V or two 7.5V supplies, but not one 5V and one 7.5V.)

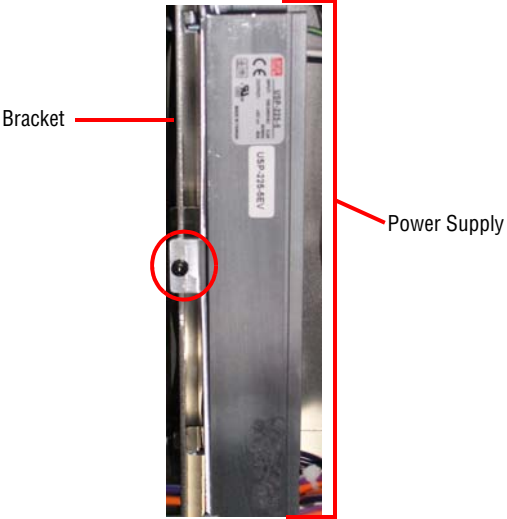
NOTE: Because the 5V and 7.5V look identical to each other, a voltage label is placed on each power supply. (Show a picture).



Item	Name	Description
A	Output	5 and 7.5VDC to a LED driver board, boost regulator (if present) and controller board (if present).
B	Voltage Adjustment Dial	Dial that allows you to adjust the voltage of the power supply.

1.2 AlphaEclipse StreetSmart sign installation

1	Remove power from the sign.	 <p>⚠ WARNING Hazardous voltage. Contact with high voltage may cause death or serious injury. Always disconnect power to unit prior to servicing. <small>SM1000A</small></p>
2	Locate the section that contains the power supply which will be replaced. To access the power supply, open section door:  <p>To open the section door:</p> <ul style="list-style-type: none">• Use a 5/32-inch hex tool to loosen each of the two door screws. 	
3	Disconnect the power supply. <p>Disconnect the AC in. Disconnect DC distribution wire assembly.</p>  	

4	Remove the screw (circled below) on the power supply bracket. Pull the power supply towards you then away from the bracket to remove.
	
5	Place the new power supply in the bracket, then tighten the screw.
6	Reattach all connectors to the new power supply.
7	Close the section door and tighten each latch.
8	Apply power to the sign.

ADAPTIVE[®]
Connecting people, places and ideas

© Copyright 2005 Adaptive Micro Systems LLC. All rights reserved.
Adaptive Micro Systems • 7840 North 86th Street • Milwaukee, WI 53224 USA • 414-357-2020 • 414-357-2029 (fax) • <http://www.adaptivedisplays.com>
Trademarked names appear throughout this document. Rather than list the names and entities that own the trademarks or insert a trademark symbol with each mention of the trademarked name, the publisher states that it is using names for editorial purposes and to the benefit of the trademark owner with no intention of improperly using the trademark.
The following are trademarks of Adaptive Micro Systems: Adaptive, Alpha, AlphaLert, AlphaNET, AlphaNet plus, AlphaEclipse, AlphaEclipse RoadStar, AlphaEclipse StreetSmart, AlphaPremiere, AlphaTicker, AlphaVision, AlphaVision InfoTracker, AlphaXpress, Automode, BetaBrite, BetaBrite Director, BetaBrite Messaging Software, Big Dot, Director, EZ KEY II, EZ95, PagerNET, PPD, PrintPak, Serial Clock, Smart Alec, Solar, TimeNet.



The distinctive trade dress of this product is a trademark claimed by Adaptive Micro Systems LLC.
Due to continuing product innovation, specifications in this manual are subject to change without notice.

September 1, 2005

1179610401
