ADAPTIVE®
Adaptive Micro Systems LLC

AlphaEclipse 3600 Series A Sign Installation Instructions

(For the most recent update, go to http://www.adaptivedisplays.com/support/eclipse)

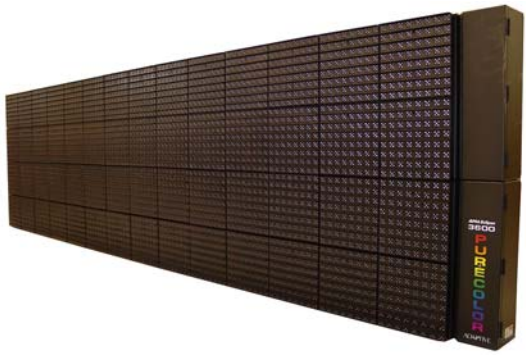

This manual applies to Series A AlphaEclipse 3600 signs.

To find out if you have a Series A sign, see the "Series letter" in "Equipment identification" on page 10.

INSTALLATION CHECKLIST

Done?	#	Description	Reference
	1	Determine required number and amperage of sign power circuits.	"Equipment identification" on page 10.
	2	For a sign using a wireless transceiver, conduct a site survey to determine where to locate the wireless transceiver that will send messages to the sign.	Contact Adaptive Technical Support.
	3	Mount sign.	"Mechanical installation" on page 12. (For a multiple-section sign, see "Shop drawings" on page 37.)
	4	Determine *sign-to-sign* connection method to be used (multiple sign installation only): ☐ Master/Master ☐ Master/Secondary Master ☐ Master/Slave	"Sign-to-sign connections" on page 21. "Serial address of a sign" on page 31.
	5	Connect *sign-to-sign* communication wire (multiple sign installation only).	"Sign-to-sign connections" on page 21.
	6	Determine *sign-to-computer* connection method to be used (identify which sign): ☐ Wired (RS485): sign serial address _____ ☐ Modem: sign serial address _____ ☐ Wireless transceiver: sign serial address _____ ☐ Fiber optic cable: sign serial address _____	"Computer-to-sign connections" on page 25.
	7	For a sign using a wired (RS485) or a fiber optic cable, connect *sign-to-computer* communication wire.	"Computer-to-sign connections" on page 25.
	9	Install temperature probe (optional).	"Temperature probe mounting (optional)" on page 15.
	9	Check termination of each sign.	"RS485 termination" on page 34.
	10	Connect power and ground to the sign.	"Electrical installation" on page 16.

© Copyright 2003-2004 Adaptive Micro Systems LLC. All rights reserved.
Adaptive Micro Systems • 7840 North 86th Street • Milwaukee, WI 53224 USA • 414-357-2020 • 414-357-2029 (fax) • http://www.adaptivedisplays.com
Trademarked names appear throughout this document. Rather than list the names and entities that own the trademarks or insert a trademark symbol with each mention of the trademarked name, the publisher states that it is using names for editorial purposes and to the benefit of the trademark owner with no intention of improperly using the trademark.
The following are trademarks of Adaptive Micro Systems: Adaptive, Alpha, AlphaLert, AlphaNET, AlphaNet plus, AlphaEclipse, AlphaPremiere, AlphaTicker, AlphaVision, AlphaVision InfoTracker, Automode, BetaBrite, BetaBrite Director, BetaBrite Messaging Software, Big Dot, Director, EZ KEY II, EZ95, PagerNET, PPD, PrintPak, Serial Clock, Smart Alec, Solar, TimeNet.
The distinctive trade dress of this product is a trademark claimed by Adaptive Micro Systems LLC.
Due to continuing product innovation, specifications in this manual are subject to change without notice.

September 28, 2004 9711-8001C

Contents

Introduction 4
Revision history 4
Related documentation 4
Safety 5
Warnings and cautions 5
Battery backup 5
Equipment overview 6
Description 6
Front and top views 6
Back and side views 7
Internal view 8
Equipment identification 10
Temperature protection 11
Equipment symbols 11
Preventing electrostatic discharge damage 11
EMI compliance 11
Installation 12
Mechanical installation 12
Overview 12
Support structure design 12
Ventilation requirements 12
Lifting the sign 14
Temperature probe mounting (optional) 15
Electrical installation 16
Guidelines for electrical installation 16
Run power to the sign 16
Ground the sign 18
Networking 21
Sign-to-sign connections 21
Master/Master sign wiring 22
Master/Secondary Master sign wiring 23
Master/Slave sign wiring 24
Computer-to-sign connections 25
RS485 wire computer-to-sign connection 26
Modem computer-to-sign connection 27

Fiber optic computer-to-sign connection 28
Wireless transceiver computer-to-sign connection (Locus) 29
Wireless transceiver computer-to-sign connection (Alpha RF900) 30
Appendix 31
Serial address of a sign 31
Opening a sign 32
How to open a sign from the back 32
How to open a sign from the front 33
RS485 termination 34
What is RS485 termination? 34
When is termination used? 34
How to terminate a sign 35
Shop drawings 37
Single cube wiring diagram (11800000-04, revision C) 38
Right wireway multi-cube wiring diagram (11800000-05, revision E, sheet 1 of 2) 40
Right wireway multi-cube wiring diagram (11800000-05, revision E, sheet 2 of 2) 42
Mechanical installation (11800000-07 revision F, sheet 1 of 5) 44
Mechanical installation (11800000-07 revision F, sheet 2 of 5) 46
Mechanical installation (11800000-07 revision F, sheet 3 of 5) 48
120V electrical installation (11800000-07 revision F, sheet 4 of 5) 50
230V electrical installation (11800000-07 revision F, sheet 5 of 5) 52
Multi-section sign: vertical split assembly (11800000-15, revision A) 54
Multi-section sign: horizontal split assembly (11800000-16, revision A) 56
Multi-section sign: vertical/horizontal split assembly (11800000-17, revision A, sheet 1 of 2) 58
Multi-section sign: vertical/horizontal split assembly (11800000-17, revision A, sheet 2 of 2) 60
Left wireway multi-cube wiring diagram (11800000-22, revision B, sheet 1 of 2) 62
Left wireway multi-cube wiring diagram (11800000-22, revision B, sheet 2 of 2) 64

Introduction

Revision history

Revision	Date	Notes
9711-8001	June 24, 2003	First release.
9711-8001A	November 25, 2003	Adaptive logo and trademark information updated.
9711-8001B	March 8, 2004	Corrected “Adaptive Explains” on page 20.
9711-8001C	September 28, 2004	Added information on Secondary Master sign connections and revised section on multiple section signs.

Related documentation

Part #	Manual title	Description
9708-8081	AlphaNET Version 3.0 User Manual	Explains the software used to create and send messages to the sign.
9711-8010	AlphaEclipse 3600 AC Distribution Board Part Replacement	Describes how to replace AlphaEclipse 3600 sign AC distribution boards.
9711-8011	AlphaEclipse 3600 Controller + 4-Channel Turbo Driver Board Part Replacement	Describes how to replace an AlphaEclipse 3600 sign controller board that has an 4-channel turbo board.
9711-8012	AlphaEclipse 3600 Red LED Driver Board Part Replacement	Describes how to replace AlphaEclipse 3600 sign LED driver boards.
9711-8013	AlphaEclipse 3600 Amber LED Driver Board Part Replacement	
9711-8014	AlphaEclipse 3600 RGB LED Driver Board Part Replacement	
9711-8015	AlphaEclipse 3600 RS485 Terminator Part Replacement	Describes how to replace AlphaEclipse 3600 sign terminators.
9711-8016	AlphaEclipse 3600 Light Sensor Board Part Replacement	Describes how to replace an AlphaEclipse 3600 sign light sensor board.
9711-8017	AlphaEclipse 3600 Controller + 8-Channel Turbo Driver Board Part Replacement	Describes how to replace an AlphaEclipse 3600 sign controller board that has an 8-channel turbo board.
9711-8018	AlphaEclipse 3600 Turbo Adapter Board Part Replacement	Describes how to replace AlphaEclipse 3600 sign turbo adapter boards.
9711-8020	AlphaEclipse 3600 Power Supply Part Replacement	Describes how to replace AlphaEclipse 3600 sign power supplies.
9711-8021	AlphaEclipse 3600 120V Fan Part Replacement	Describes how to replace AlphaEclipse 3600 sign cube fans.
9711-8022	AlphaEclipse 3600 240V Fan Part Replacement	

Safety

Warnings and cautions

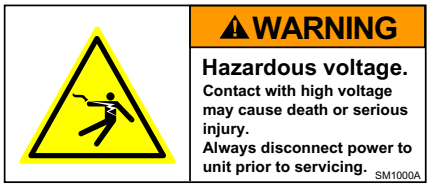

Other warnings and cautions are posted in appropriate locations throughout this manual.

Battery backup

In the event of power loss, backup batteries in an AlphaEclipse sign provide power in order to save messages and time settings.

A backup battery is located on the top of a sign's controller board under the turbo driver board (the dashed line below). The backup battery should only be replaced by a qualified Adaptive technician:

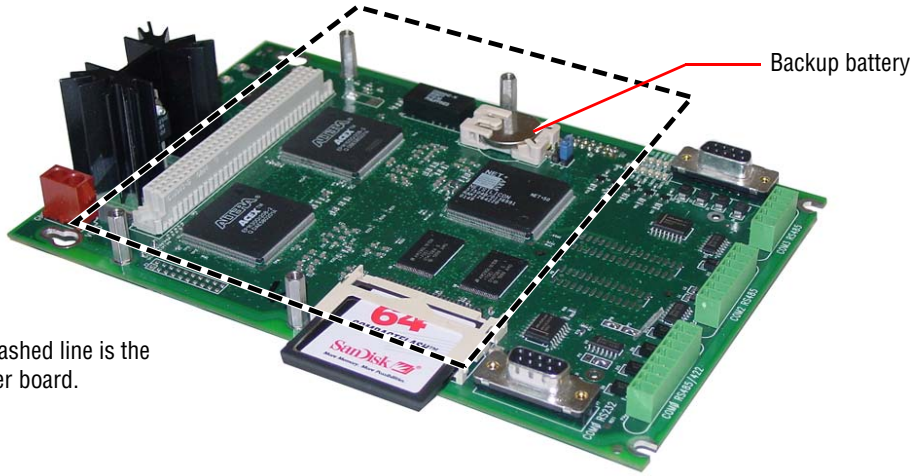

Controller board — the dashed line is the location of the turbo driver board.

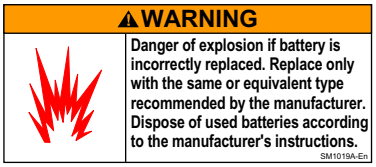

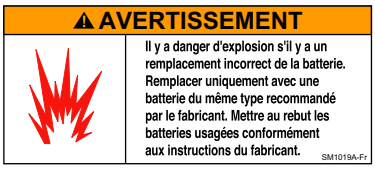

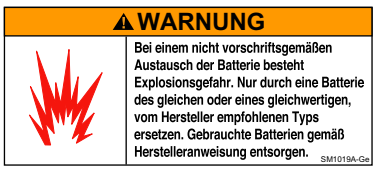

Equipment overview

Description

Front and top views

Shown below is a 64 x 32 pixel sign with the wireway on the right side of the sign. Other sign sizes are similar.

Top view



Front view

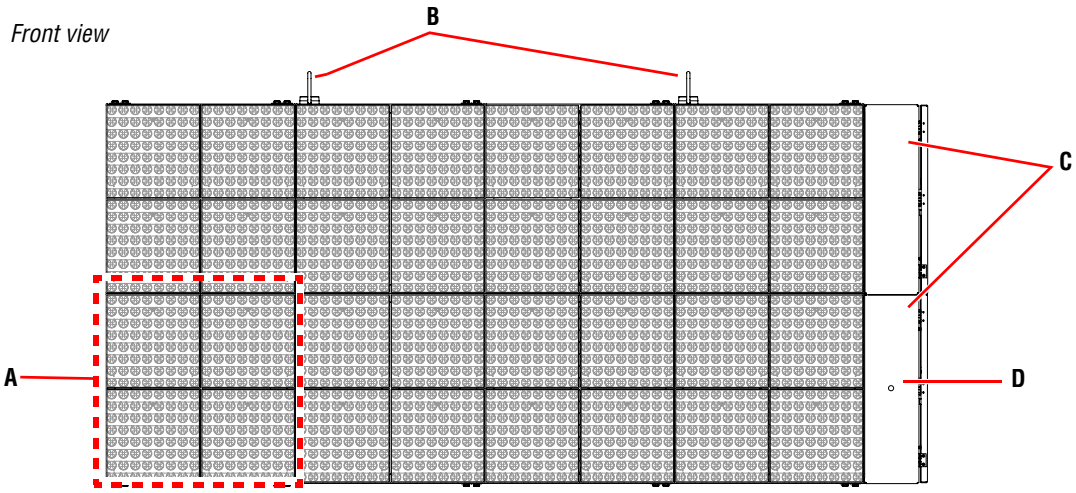

Item	Name	Description
A	Cube	Consists of four LED modules: Each LED module can be removed from the front of the sign.  Each LED module is 8 pixels tall by 8 pixels wide (8 x 8). So each cube is 16 x 16 pixels.  A single LED pixel.
B	Lifting hooks	Used to lift the sign during installation. These hooks should be removed after the sign is installed.
C	Wireways	Used to route power and communication wires to all the LED modules. Wireways may be mounted on either the left or the right side of a sign: *Left side wireway*   *Right side wireway*
D	Light sensor hole	Allows light into the light sensor. This opening should be kept free of obstructions.

Back and side views

Shown below is a 64 x 32 pixel sign with the wireway on the right side of the sign. Other sign sizes are similar.

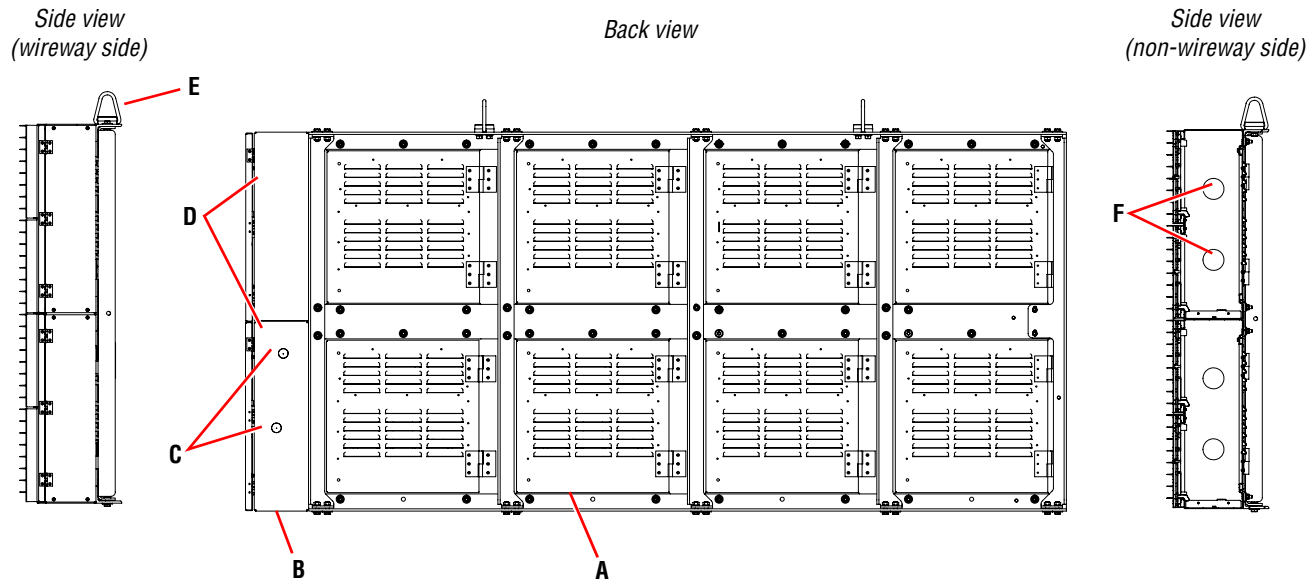

Item	Name	Description
A	Cube support frame	Each cube is attached to the cube support frame: 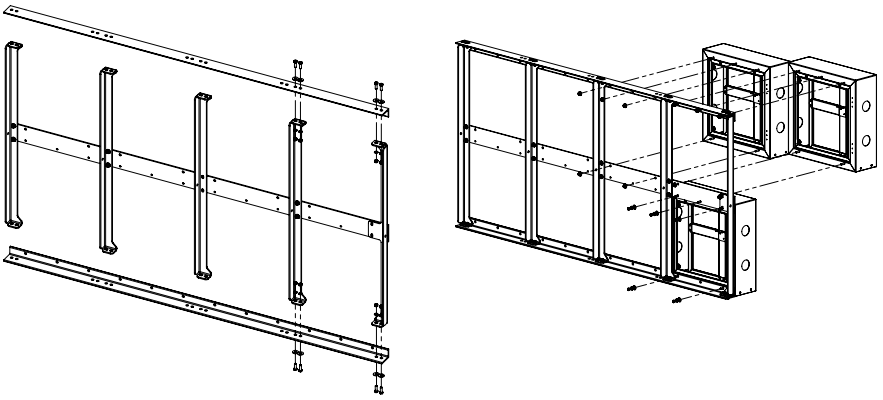
B	Conduit holes	Four punchout holes located on the bottom of the wireway. These holes can be used to attach conduit in order to route power and communication wires to the sign.
C	Optional conduit holes	Locations where up to 1.38-inch conduit holes can be drilled.
D	Wireways	Used to route power and communication wires to all the LED modules.
E	Lifting hook	Used to lift the sign during installation. These hooks should be removed after the sign is installed.
F	Wireway connection holes	Used to route power and communication wires between each LED module.

Internal view

Shown below is a 64 x 32 pixel sign. Other sign sizes are similar.

Left side wireway sign

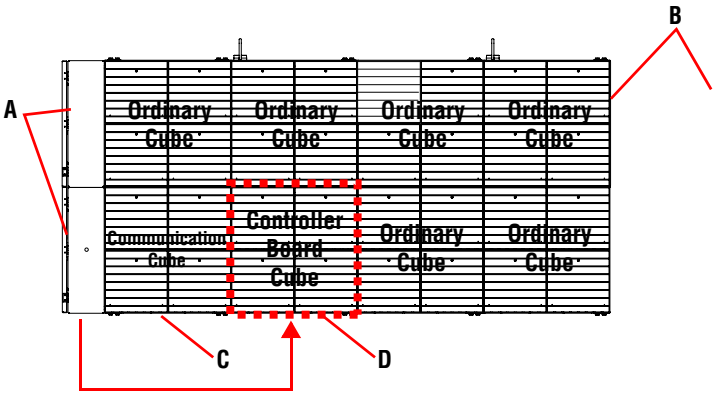

Right side wireway sign

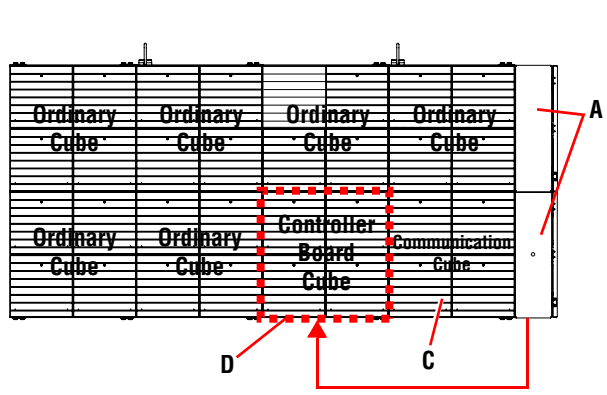

The controller board cube is always on the bottom row and the second cube from the wireway. There is one controller board cube in a sign. The communication cube is always on the bottom row next to the wireway. There is one communication cube in a sign.

Item	Name	Description
A	Wireway	Used to route power and communication wires to all the LED modules. Wireways can be mounted on either the left or right side of a sign. The bottom wireway (shown below) contains the light sensor, wireway terminal block, and the power terminal block: *Bottom wireway (opened)* 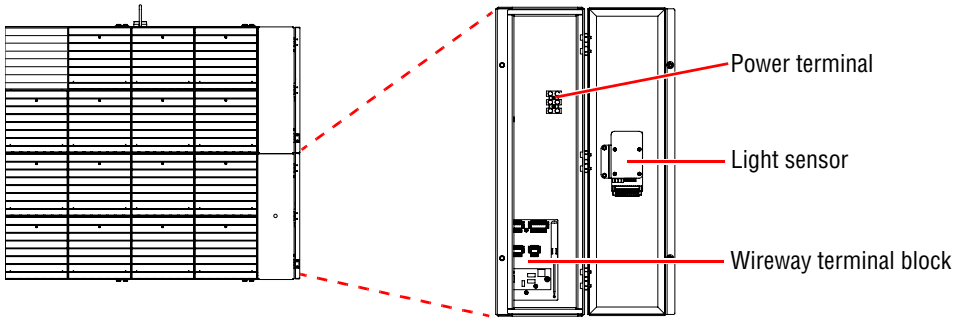
B	Ordinary cube	The parts inside an ordinary cube can be accessed by either removing the four LED modules from the front of the cube or by opening the back of the cube (shown below): 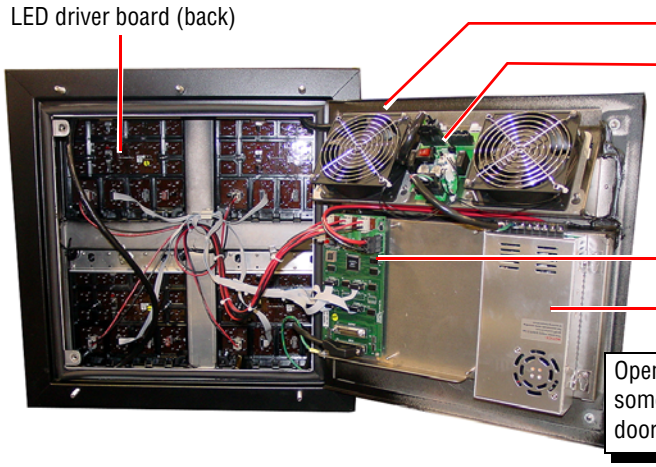 Open a sign door slowly. Otherwise some of the cables attached to the door may snap off.

C Communication cube

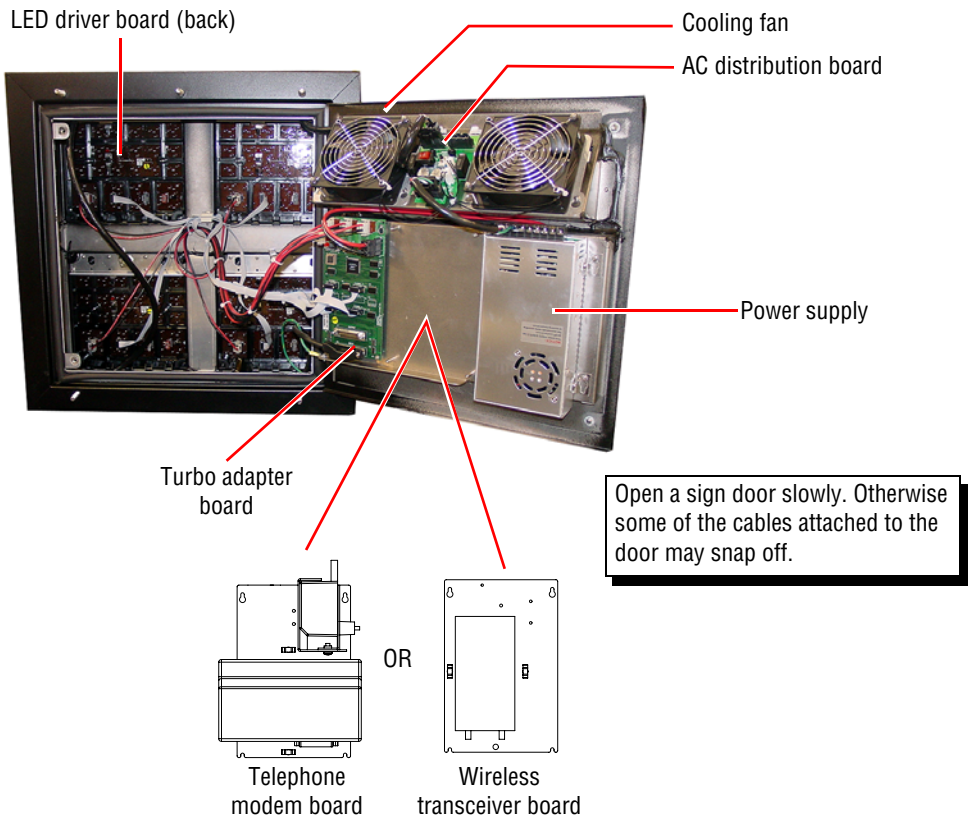

Open a sign door slowly. Otherwise some of the cables attached to the door may snap off.

D Controller board cube

The parts inside a controller board cube can be accessed by either removing the four LED modules from the front of the cube or by opening the back of the cube (shown below):

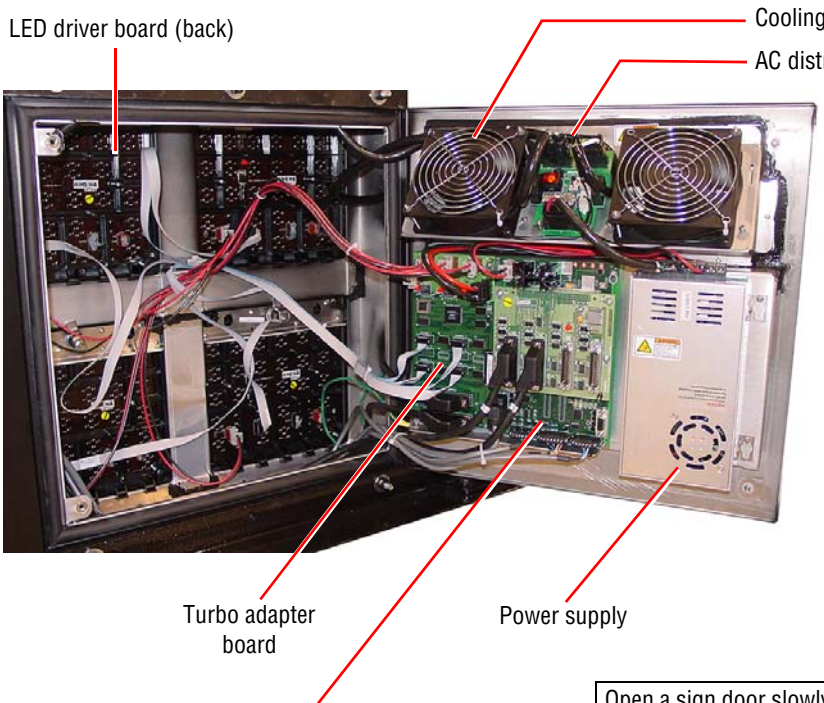

Open a sign door slowly. Otherwise some of the cables attached to the door may snap off.

Equipment identification

Equipment identification labels and warning labels (such as high voltage) are located inside the sign.

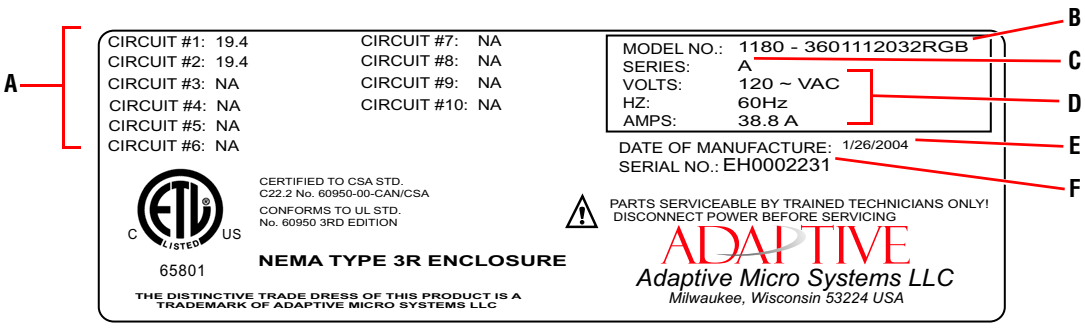

Item	Name	Description
A	Required electrical circuits	Number of electrical circuits and the amount of amperage per circuit required to power the sign.
B	Model number	1180 – 3601112032RGB LED lamp color: • RGB = red, green, blue • RED = red • AMB = amber Height of sign in pixels Length of sign in pixels LED viewing angle: • 3600 = 30 degrees • 3601 = 70 degrees Model series
C	Series letter	Revision level of sign.
D	Electrical information	Input voltage, frequency, and total amperage of sign.
E	Date of manufacture	Month, day, and year the sign was made.
F	Serial number	Consecutive, unique identification number.

Temperature protection

If the temperature inside of a sign cube exceeds . . .

- 110°F (43°C) — the cube's fans will start. When the temperature falls below 80°F (27°C), the fans will stop.
- 170°F (77°C) — power is removed from cube components except the fans. When the temperature falls below 140°F (60°C), power will be applied again.

Equipment symbols

Chassis ground

Power (I = On, 0 = Off)

Preventing electrostatic discharge damage

This equipment contains components that may be damaged by "static electricity", or electrostatic discharge. To prevent this from happening, be sure to follow the guidelines in Adaptive Tech Memo 00-0005, *"Preventing Electrostatic Discharge (ESD) Damage,"* available on our Web site at http://www.adaptivedisplays.com.

EMI compliance

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with installation guidelines, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

Installation

NOTE: For sign that are shipped in multiple sections and must be assembled before installing, see "Shop drawings" on page 37.

Mechanical installation

Overview

Because every sign installation is unique, there is no single procedure for mounting AlphaEclipse 3600 signs.

This section is only intended as a guide. A set of sign shop drawings is located at the end of this manual. These drawings should aid in most any type of installation.

All installations, superstructure designs, and connections must be designed and approved by a qualified structural engineer. Call Adaptive Micro Systems at 1-800-558-7022 for contact information for structural engineering consultants.

- Drill holes as needed in the sign's steel framework for fasteners, but consult the attached shop drawings for excluded areas. *Drilling holes in any of these excluded areas will void the sign's warranty.* When drilling holes, follow these guidelines:
  - Connections must be analyzed by a structural engineer.
  - Dissimilar metals should be isolated to avoid galvanic corrosion.
- Any area on the sign's frame that had paint removed during mounting must be recoated with a paint recognized by UL test #1332. *Failure to repaint the area will result in accelerated corrosion of the sign's structure. Adaptive Micro Systems is not responsible for any failure in the sign's structure because of this.* (POLANE HS Plus Polyurethane Enamel is used to paint the sign's frame during manufacturing.)

Support structure design

The design of a sign's support structure depends on a number of factors:

- mounting methods
- building codes
- foundation
- sign size
- sign weight
- sign height
- wind loading

Ventilation requirements

If the sign is mounted to a solid surface like a wall, then nothing should block the space between the top, bottom, and sides of the sign and the solid surface.

If there is an obstruction (as in a monument-style installation), then run duct work (not supplied) from the bottom side of the sign and laterally to the top of the sign to exhaust hot air. Be sure no rain or snow can enter the sign through this duct work. To avoid heat build-up and depending on sign size, more space may be required at the back of the sign to provide ample air flow. Fans can be used to supplement natural air flow. Adaptive Micro Systems recommends isolating the fresh air intakes from the exhaust air.

Multiple section sign assembly

Very large AlphaEclipse 3600 signs will be shipped from the factory in multiple sections. Multiple section signs are assembled in one of three ways:

Vertical split assembly

See “Multi-section sign: vertical split assembly (11800000-15, revision A)” on page 54.

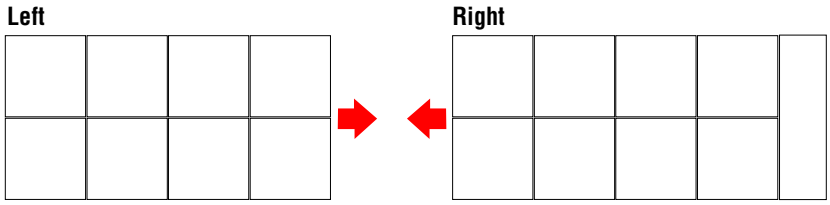

Horizontal split assembly

See “Multi-section sign: horizontal split assembly (11800000-16, revision A)” on page 56.

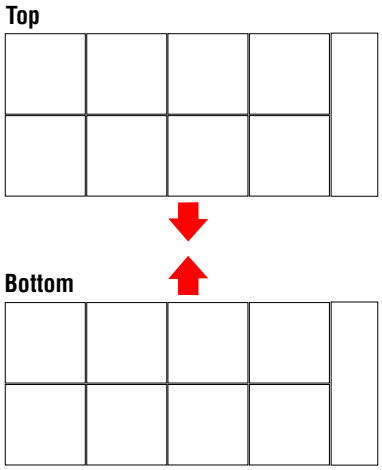

Vertical and horizontal split assembly

See “Multi-section sign: vertical/horizontal split assembly (11800000-17, revision A, sheet 1 of 2)” on page 58.

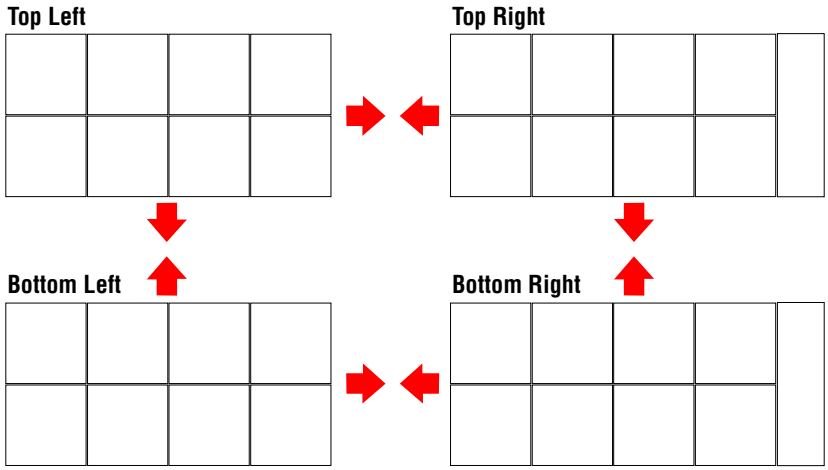

Lifting the sign

Use the two lifting hooks on the sign with a lifting bar to raise the sign:

NOTE: After mounting the sign, remove the lifting hooks.

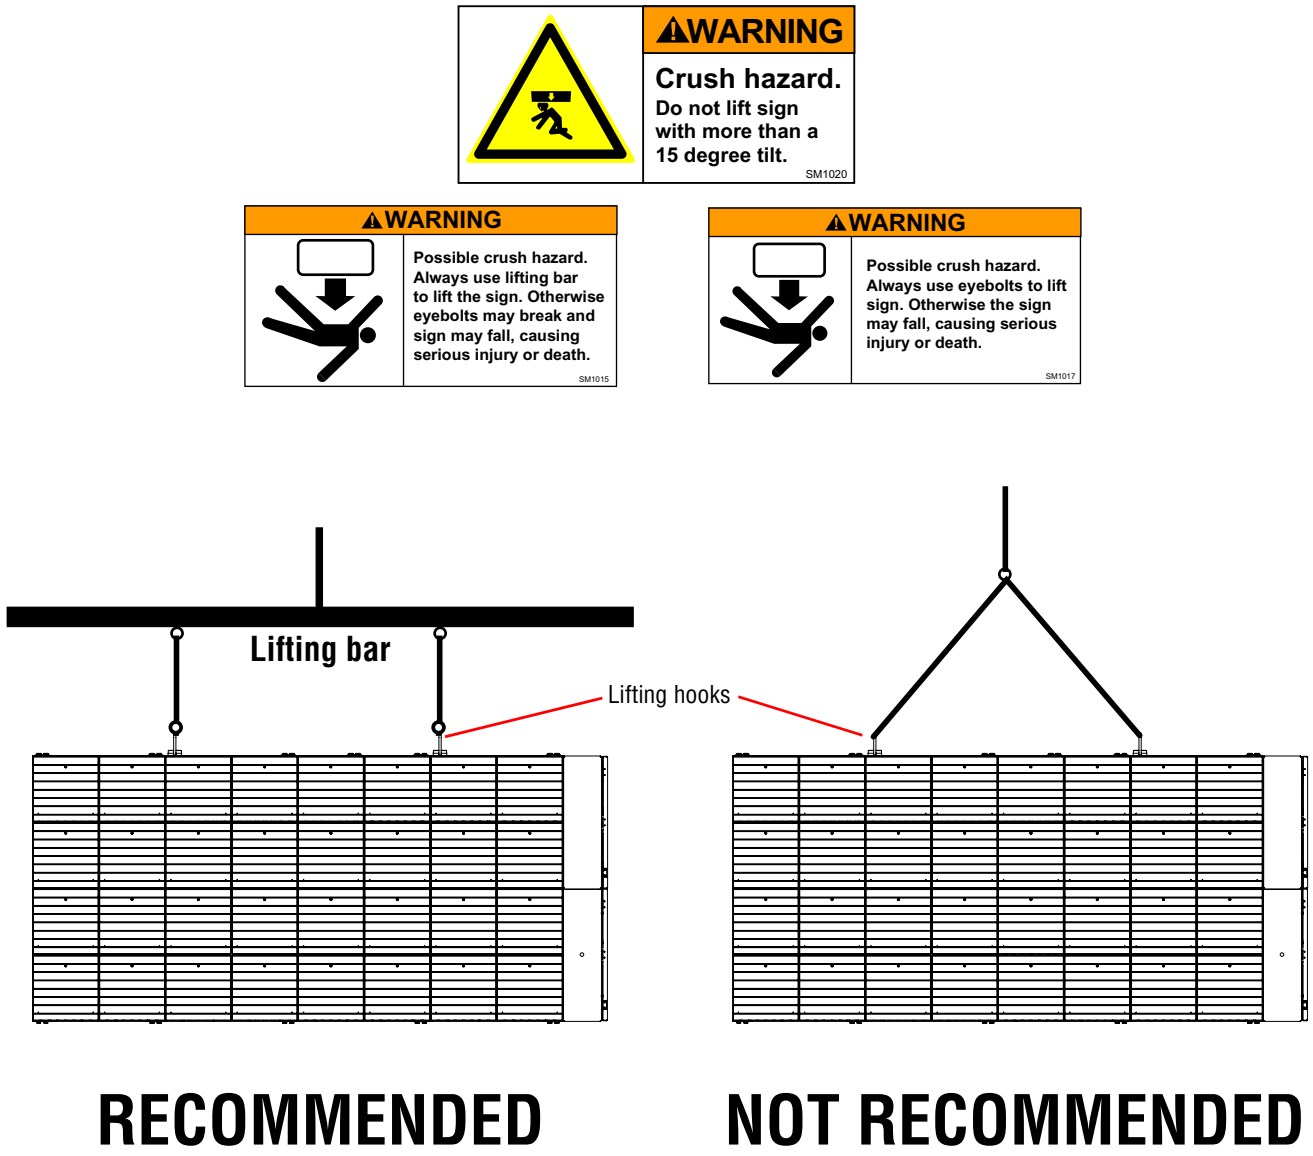

Figure 1: Sign lifting methods

Temperature probe mounting (optional)

NOTE: Complete this section only if your sign is equipped with a temperature probe.

NOTE: For two or more signs connected as Master/Master (page 22), attach a temperature probe to *each* sign. For two or more signs connected as Master/Secondary Master (page 23) or Master/Slave (page 24), connect a single temperature probe to *just* the Master sign.

Mounting guidelines

- Choose a location where air movement is not restricted by nearby walls or other obstructions. A light-colored background is preferable to a dark-colored mounting background. A location above vegetation is preferable to a location above asphalt or blacktop.
- Mount the temperature probe at least one foot below the eave of a protected overhang so convection currents (rising hot air flow) are not trapped around the temperature probe. Also, make sure convection currents are not blocked by the mounting plates.
- A location on the north side of a building or other large structure will afford protection from the afternoon sun. Mount the temperature probe at least 6 feet off the ground. Shield the probe from the effect of the direct sun, reflected heat, or any nearby sources of heat, such as chimneys, vents, or HVAC ducts.

Installation

1. Mount the temperature probe vertically using the mounting plate on each side of the probe. The temperature probe can be mounted on either a flat or a curved surface.
2. Run the temperature probe cable into the wireway.

   NOTE: The temperature probe cable and the sign's power wires should be run in different conduits.
3. Connect the temperature probe cable to TB2 on the wireway terminal block as shown below. Notice the jumper wire that connects #4 and #5.
4. Close the wireway securely with the screws provided.

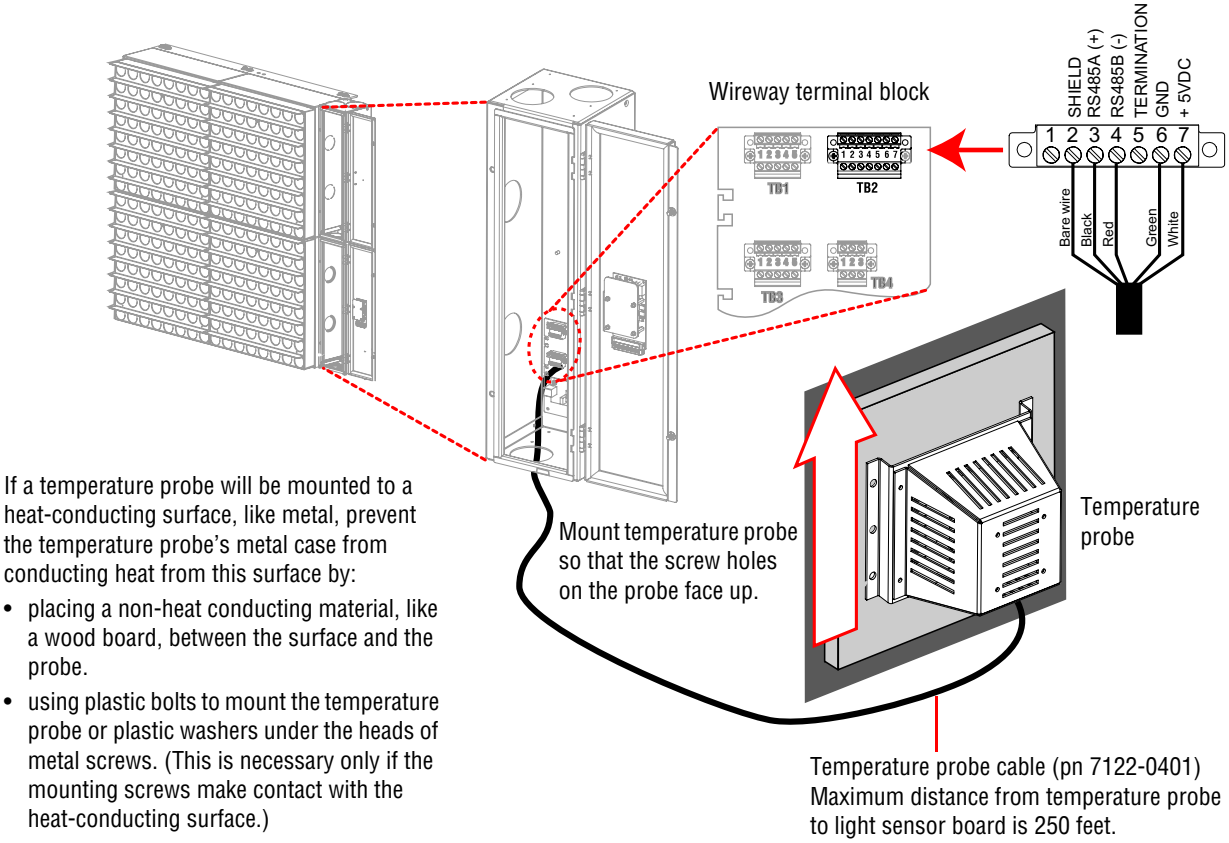

If a temperature probe will be mounted to a heat-conducting surface, like metal, prevent the temperature probe's metal case from conducting heat from this surface by:

- placing a non-heat conducting material, like a wood board, between the surface and the probe.
- using plastic bolts to mount the temperature probe or plastic washers under the heads of metal screws. (This is necessary only if the mounting screws make contact with the heat-conducting surface.)

Electrical installation

Electrical installation should only be attempted by a qualified electrician. Electrical connection must comply with all applicable national and local codes.

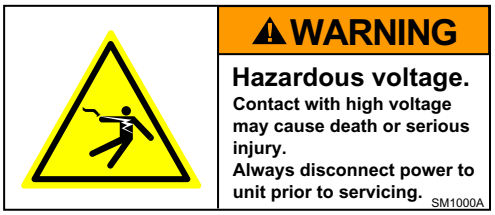

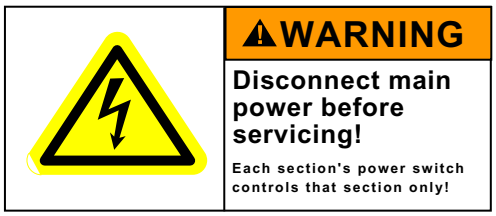

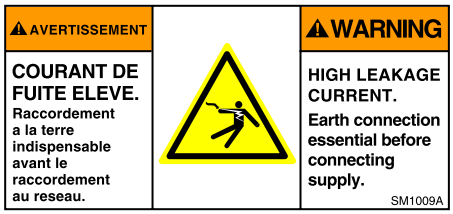

Guidelines for electrical installation

- Inspect all internal sign cabling for proper connection and seating.
- All power wiring must be from circuit breaker-protected lines.
- A two-pole disconnect device must be installed in the building wiring for each branch circuit supplying the sign.
- The sign must be properly grounded according to the applicable codes (for example, NEC Article 250 and 600, and IEEE 1100-1999).
- Run separate conduits for signal wires (for example, RS232, RS485) and for power wires. However, fiber optic wire may be run in the same conduit with power wires.
- All electrical connections must be watertight.
- Use minimum 80° C copper wire only.
  Utiliser uniquement un fil en cuivre pouvant supporter 80° C minimum.
- Torque terminals to a minimum of 7 in/lbs and a maximum of 10 in/lbs.
  Serrer les bornes à 0,79 N/m minimum, mais pas à plus de 1,13 N/m.

Run power to the sign

1. Use a 5/32-inch hex tool to loosen the hex screws on each of the sign's wireway doors. Then open each wireway door:

5/32-inch hex tool
(pn 6811-7076)

2. On the bottom wireway door, locate the equipment identification label. On this label, find the number and amperage of each power circuit that must be run to the sign (example below):

In this example, two 120V circuits are required to power the sign:

- Circuit #1 = 19.4 amps
- Circuit #2 = 19.4 amps

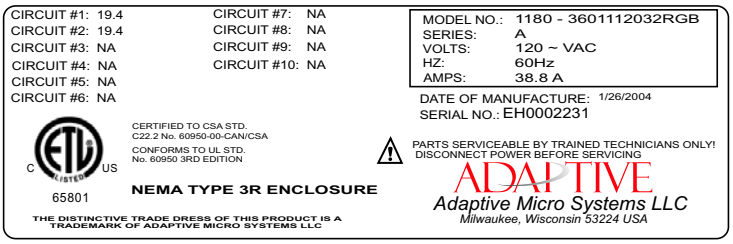

Figure 2: Equipment identification label

3. Run power wires to the wireway using waterproof conduit:

NOTE: A separate conduit must be provided for communication wires. Power and communication wires should never be placed together in the same conduit *unless the communication wires are fiber optic*.

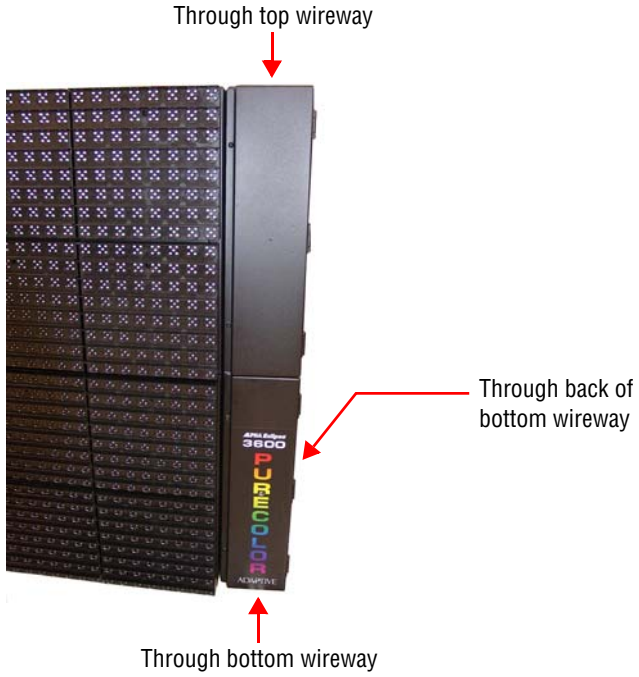

Figure 3: Wireway conduit locations

Adaptive Explains

Why is it necessary to always run *two* conduits to a sign?

It is *not* always necessary. Two conduits are only necessary when communication wire, like RS485 wire, is run to a sign from a computer or from another sign. In these cases, one conduit would contain the sign's power wires and the other conduit the communication wires.

If power and communication wires are put in the same conduit, there is a chance the communication wires might pick up electrical interference from the power wires. For example, when a live power cord is placed next to a stereo speaker wire, the interference from this cord may cause the speaker to hum. In the case of a sign, this same effect could disrupt messages sent to the display.

On the other hand, *fiber optic cable* and power wires can share the same conduit because fiber optic cable is immune to electrical interference.

4. Connect each power circuit to the appropriate wireway power terminal (example below):

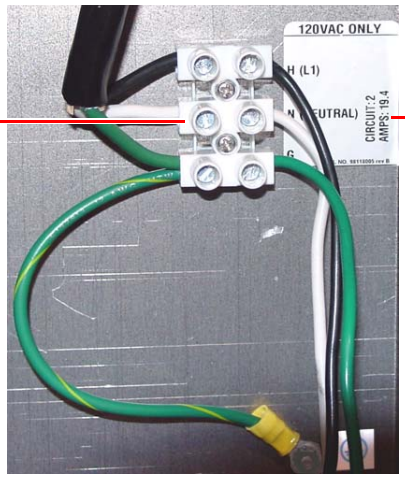

Figure 4: Wireway power terminal

Ground the sign

The sign must be properly grounded in order to provide three types of protection:

- Ground fault protection (see page 19) — The sign must be wired to provide a permanent, low impedance pathway to carry sign ground fault current. This is necessary in order to quickly clear a sign ground fault by opening the power circuit to the sign.

  Earth grounding a sign through some type of ground rod bonded to the sign is not sufficient ground fault protection.

- Lightning strike protection (see page 20) — A sign must be earth grounded either through an existing ground rod or separate ground rod(s) bonded to the sign (see NEC Article 250.32).
- Electronic equipment protection (see page 20) — An improperly wired sign could radiate electromagnetic fields (EMF) that may damage or interfere with electronic equipment in or near the sign (see NEC Article 250.6).

Figure 5: Wireway grounding points

Ground fault protection

A "ground fault" protected circuit is different from a "ground fault interrupt" protected circuit.

A sign *should* be ground fault protected as shown.

However, a sign *should not* be connected to a ground fault interrupt (GFI) protected circuit.

Sign with Ground Fault Protection

= ground fault current path

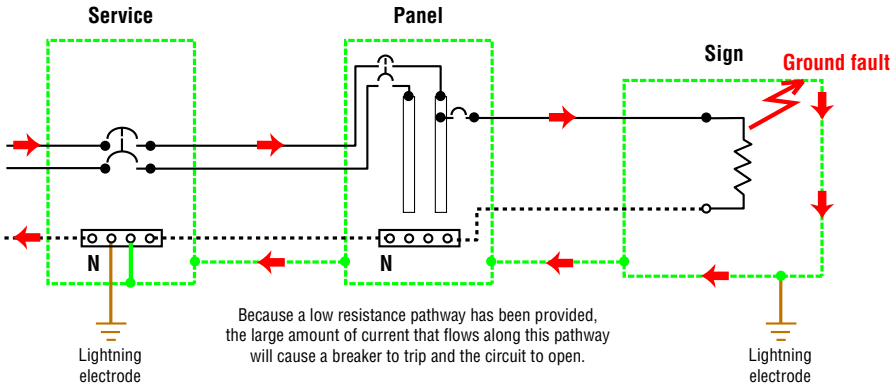

Sign without Ground Fault Protection

= ground fault current path

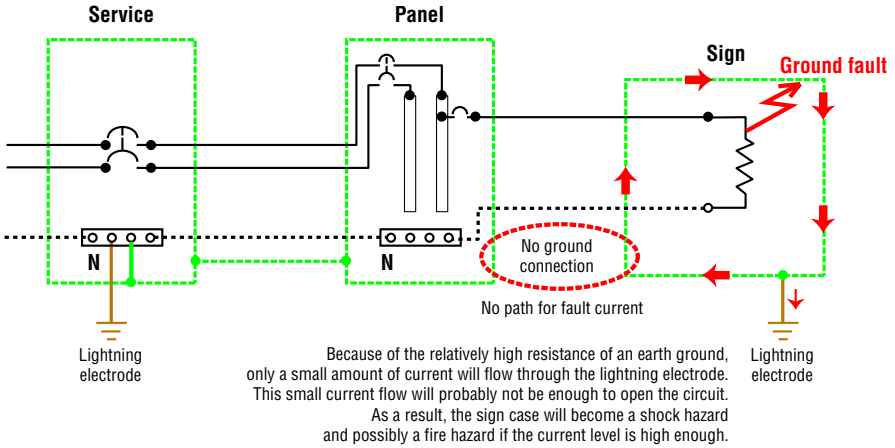

Adaptive Explains

What is a ground fault?

It's when a "hot" wire *unintentionally* makes contact with metal, like an electrical outlet box or the case of a sign. If a sign is wired properly, a circuit breaker will trip (or "open") because too much electrical current is flowing. The ground fault will have to be corrected before the circuit breaker can be closed.

How do you protect against ground faults?

Provide a ground fault current path with so *little* resistance (basically just the resistance of the power wires) that a *huge* amount of current tries to flow. For example, imagine a sign is powered by 120V and is connected to a 20 ampere circuit. If this sign tries to draw more than 20 amps of current, the circuit breaker will trip and the circuit will open. Let's say that this sign is 300 feet away from its power source and that the total resistance of this wire is 0.4 ohms. Using Ohm's Law, the fault current = 120V divided by 0.4 ohms = 300 amps! This amount of current will cause the circuit breaker to open very quickly — removing the shock threat.

Why can't lightning rods be used to protect against ground faults?

A lightning rod (or earth ground) may have too *much* resistance and so not enough current will flow through it to cause a circuit breaker to open. For example, imagine an earth ground has a resistance of 10 ohms, which is low. Using Ohm's Law again, the fault current = 120V divided by 10 ohms = 12 amps. This is not enough current to cause the 20 amp circuit breaker to open. This means the ground fault would not be cleared and dangerous levels of current would be present on the sign's case *and* near the ground rod itself.

Lightning strike protection

A sign bonded to an earth ground has a means of dissipating the high voltage and current from a lightning strike. The resistance of the grounding electrode should be as low as possible. However, damage can still occur to a sign's electronic equipment from lightning voltage transients.

Though some surge protection is incorporated into a sign, to protect a sign from high-voltage lightning transients, surge protectors need to be installed at the panelboards (see NEC Article 280 and 284).

Electronic equipment protection

A common cause for the failure of sensitive electronic equipment is the presence of objectionable current (also called objectionable neutral current) on grounding and bonding paths.

Objectionable neutral current can be caused by:

- Errors in installation wiring
- Improper neutral-to-case bonds (illustrated below)

Objectionable Neutral Current caused by Improper Neutral-to-Case Bond

⇨ = normal current path
➡ = objectionable neutral current path

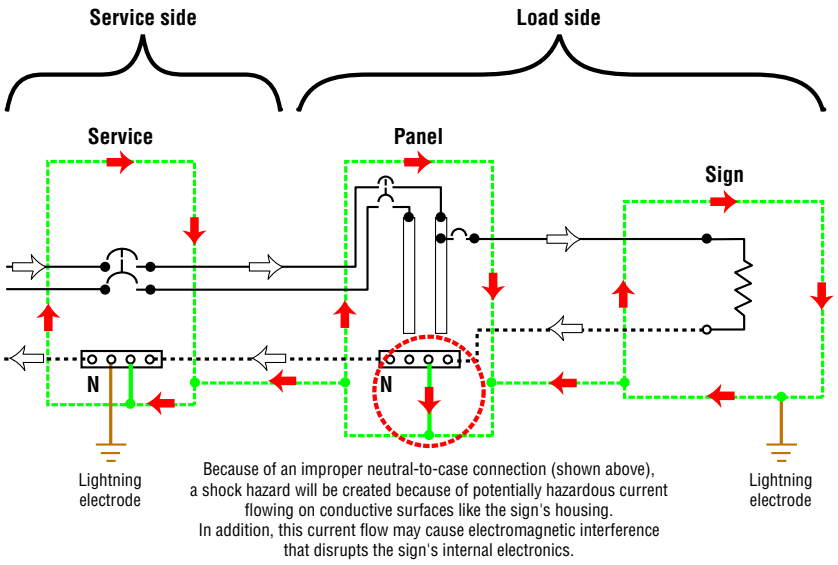

- Equipment-grounding conductor used to carry neutral current — This situation arises when no separate grounding wire is present when connecting power to a sign. NEC Article 250.32(B)(2) *does* permit a neutral-ground bond to be used in a separate structure if all of the following three conditions are met:

  (1) an equipment grounding connector is not run with the supply to the structure

  (2) there are no continuous metallic paths bonded to the grounding system in both structures involved

  (3) equipment ground-fault protection has not been installed on the common AC service

Adaptive does not recommend using the equipment-grounding connector to carry neutral current as permitted by NEC 250.32(B)(2) because it creates a potentially hazardous situation. For example, a future installer might connect cabling between the two structures and this could create a dangerous parallel current path.

Adaptive Explains

How can you tell if objectionable neutral current is present?

A true RMS microohm multimeter can be used to measure the voltage difference between the neutral and ground conductors. Though a difference of 0V is ideal, the voltage difference should not exceed 0.5V.

Networking

Up to four AlphaEclipse 3600 signs can be connected together into a network (see "Sign-to-sign connections" on page 21).

Also, in order to display messages, a sign must be connected to a computer that is running AlphaNET software (see "Computer-to-sign connections" on page 25).

Sign-to-sign connections

NOTE: When two or more signs are connected together, they must be properly terminated. See "RS485 termination" on page 34.

Two or more signs can be set up as either

- Master/Master signs (page 22) — two to four signs that can display a different message. While the same message could be sent to both Master signs, the messages may not appear at *exactly* the same time on the signs. In order to display the temperature in Master/Master signs, a temperature probe must be connected to *each* of the signs.
- Master/Secondary Master (page 23) — identical to signs connected as Master/Master except for temperature display. Signs connected as Master/Secondary Master only require that a single temperature probe connected to *just* the Master sign. This is the main advantage of Master/Secondary Master sign connection.
- Master/Slave signs (page 24) — all these signs display *the same message at the same time*. In this setup, one sign is configured as the Master and all the others as Slave signs.

Adaptive Explains

Does it matter if signs are set up as Master/Master, Master/Secondary Master, or Master/Slave?

The most important difference between Master/Master and Master/Slave signs is that Master/Slave signs *all* display *the same message at the exact same time*. On the other hand, signs configured as Master/Master or Master/Secondary Master allow you to display a *different* message on each of the signs.

However, to display the temperature on signs, use either Master/Secondary Master or Master/Slave mode because only one temperature probe is required. (In Master/Master mode, a temperature probe is needed for *each* sign.)

How are signs set up to be Master/Master, Master/Secondary Master, or Master/Slave?

Signs are configured at the factory.

Is there any way to tell if a sign is a Master, a Secondary Master, or a Slave sign by just looking at it?

Probably not without turning the sign off and then on again. When you do this, the word "Master", "Sec-Master" or "Slave" will appear in the sign's startup messages.

Also, if you are able to see the back of the sign's wireway, there is a label that indicates how the sign is configured.

Master/Master sign wiring

Master / Master sign connection — **AlphaEclipse 3600**

Overview

Signs connected as Master/Master can each display a unique message — unlike Master/Slave signs in which both all the signs always display the same message at the same time.

In a Master/Master sign pair, a message can be displayed on Master sign #1 by sending the message to serial address 1, or displayed on Master sign #2 by sending the message to serial address 2.

Also, a message can be displayed on all Master signs by broadcasting the message to serial address 0.

Wiring

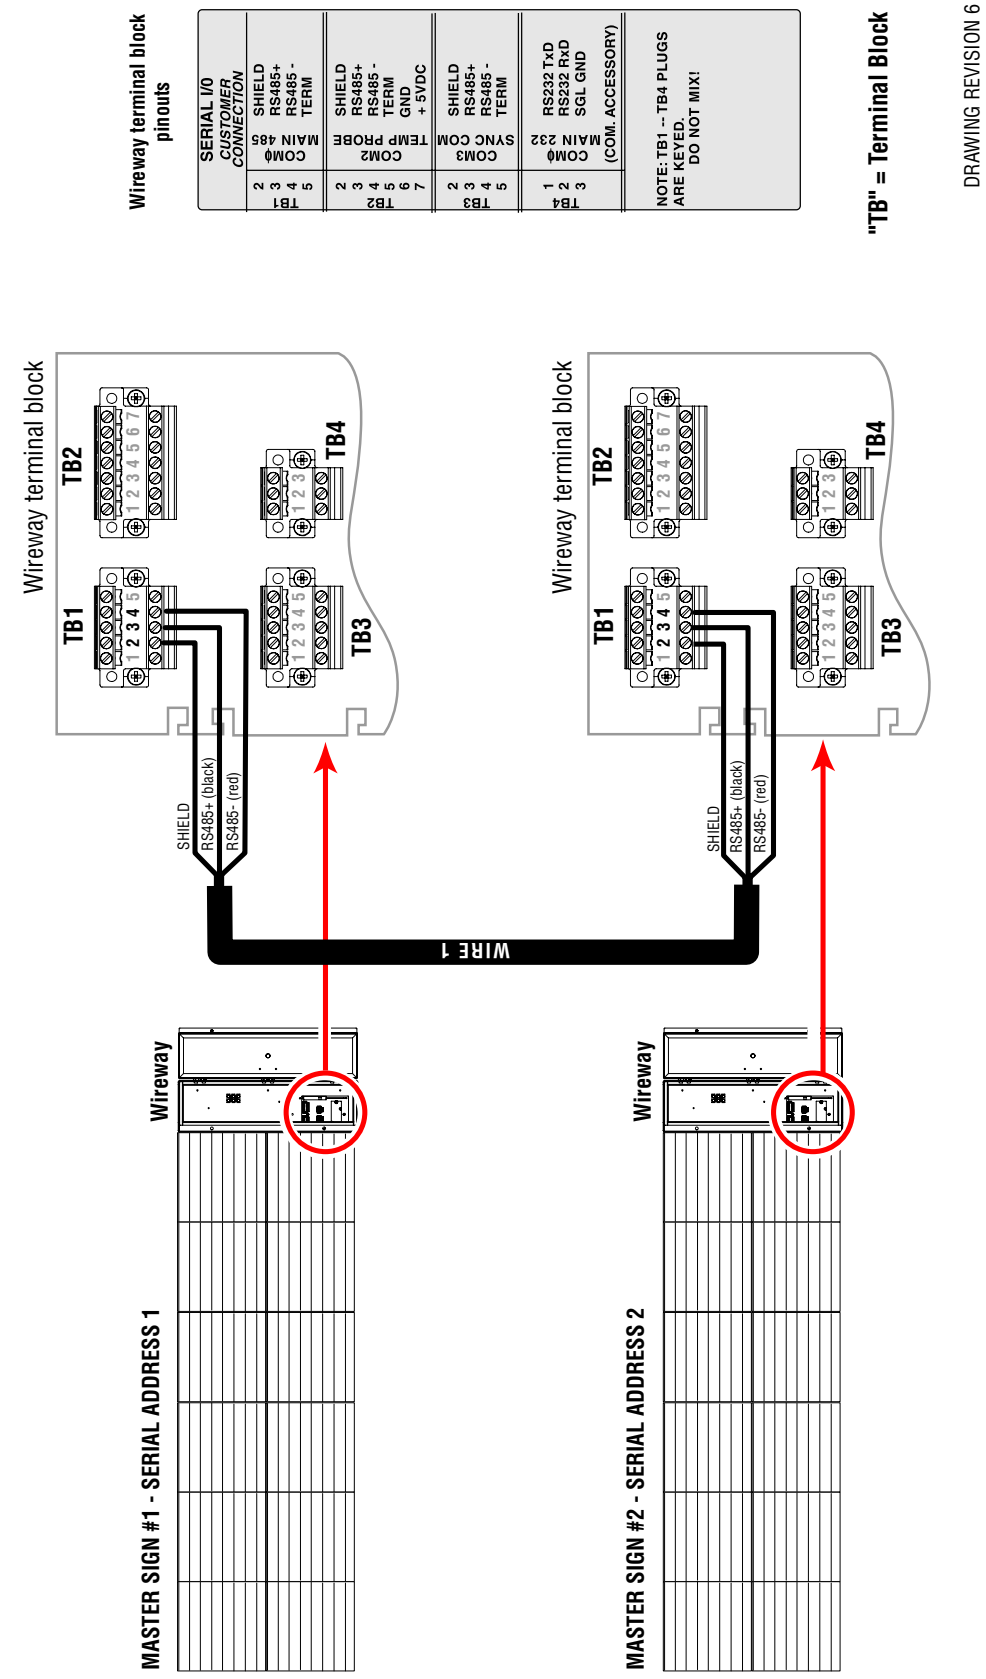

Master/Secondary Master sign wiring

AlphaEclipse 3600

Master / Secondary Master sign connection

Overview

Signs connected as Master/Secondary Master can each display a unique message — unlike Master/Slave signs in which all the signs always display the same message at the same time.

In a Master/Secondary Master sign pair, a message can be displayed on Master sign #1 by sending a message to serial address 1, or displayed on Secondary Master sign #2 by sending a message to serial address 2.

Also, a message can be displayed on all the signs by broadcasting the message to serial address 0.

Wiring

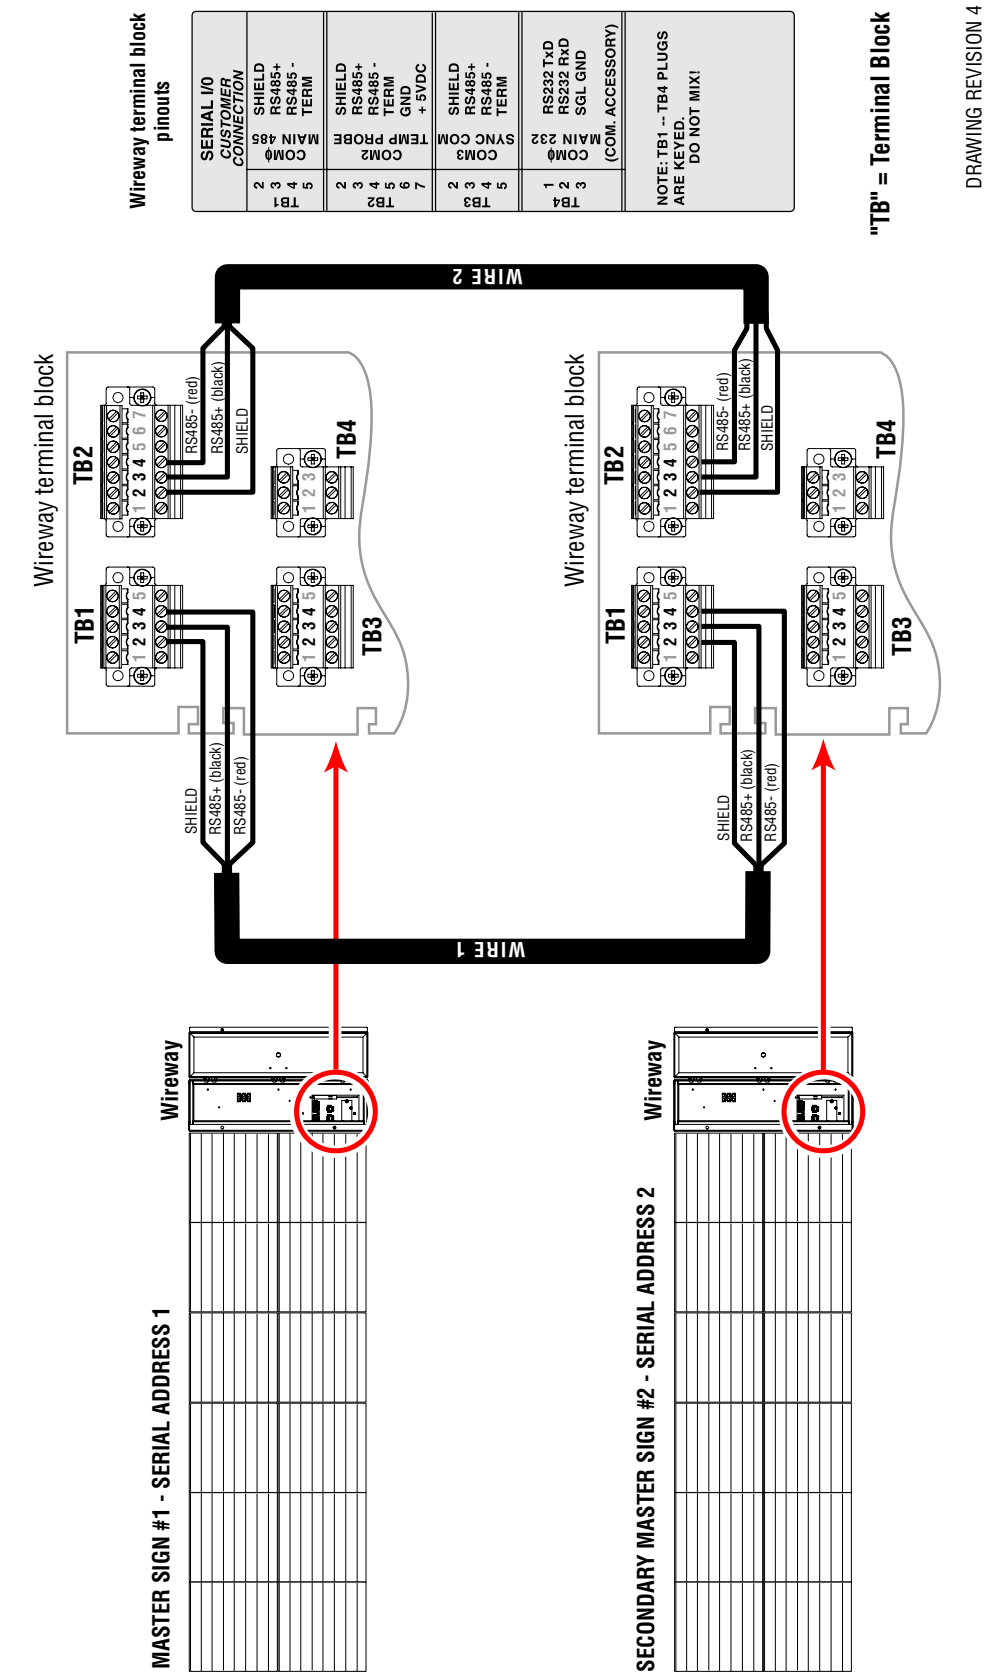

Master/Slave sign wiring

Master / Slave sign connection — **AlphaEclipse 3600**

Overview

Signs connected as Master/Slave always display the same message at the same time — unlike Master/Master signs in which unique messages can be displayed on each sign.

For Master/Slave signs, all messages should be sent to either serial address 0 or to all the sign's addresses (in the example below, address 1 and 2).

Wiring

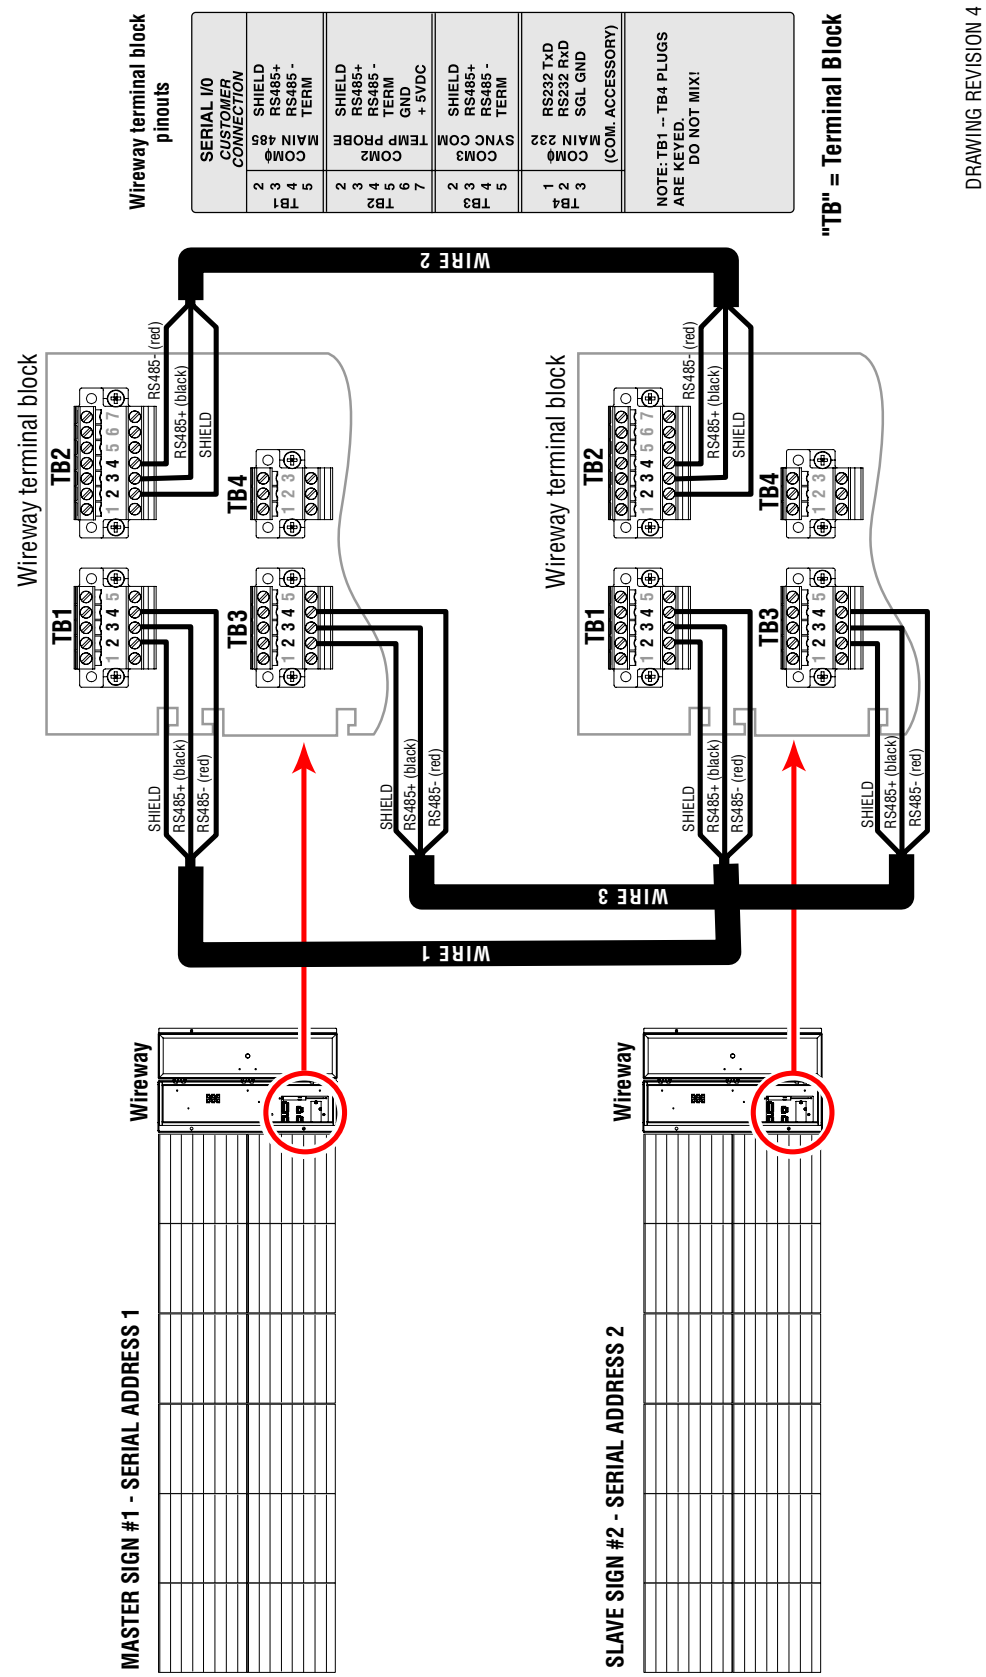

Computer-to-sign connections

In order to display messages, a sign must be connected to a computer that is running AlphaNET software. (This computer is referred to as the "messaging computer".)

There are a number of ways to connect the messaging computer to a sign:

- RS485 wire (page 26) — using RS485 outdoor wire (pn 7124-0203), a sign can be wired to a computer that could be up to 4000 feet away from the sign.

  Ordinary wire, phone wire, CAT 5 wire, and so on should NOT be used in place of Adaptive's RS485 outdoor wire.

- Modem (page 27) — by placing a modem inside a sign (factory installed) and attaching another modem to the messaging computer, messages are sent to a sign through ordinary phone lines.
- Fiber optic (page 28) — using a fiber optic mini-modem inside a sign (factory installed) and another mini-modem connected to the messaging computer, a sign can be connected to a computer that could be up to 2 miles away from the sign. Fiber optic cable is immune to electrical interference so the cable can be placed in the same conduit as the power wires.
- Wireless transceiver (page 29) — for this option, one wireless transceiver is placed inside the sign (called the "Receive" unit which is factory installed) and another transceiver (called the "Master") is connected to the messaging computer. Wireless transceivers can connect to a sign up to 2 miles away. (Actual distance can vary greatly depending on the local environment, obstructions, electrical interference, and so on.)

RS485 wire computer-to-sign connection

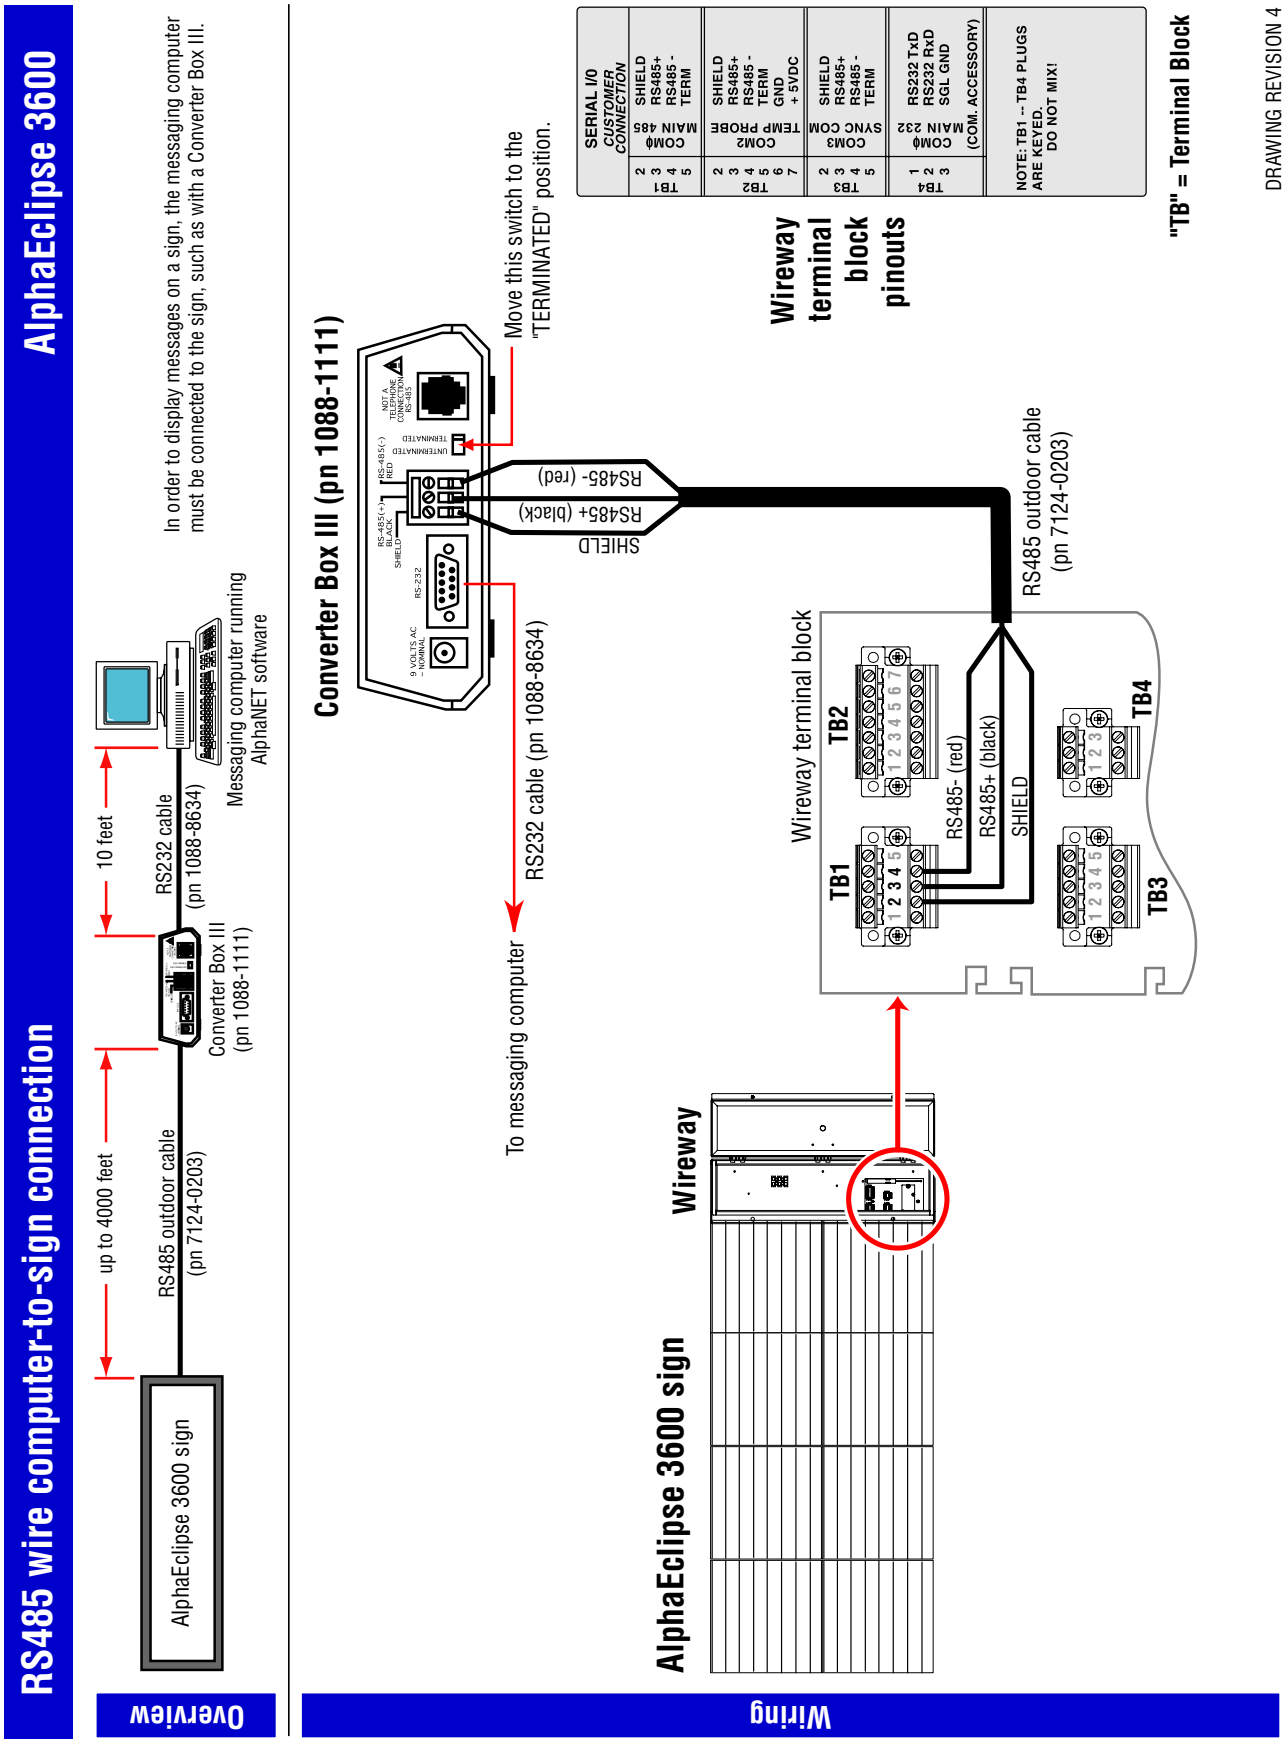

Modem computer-to-sign connection

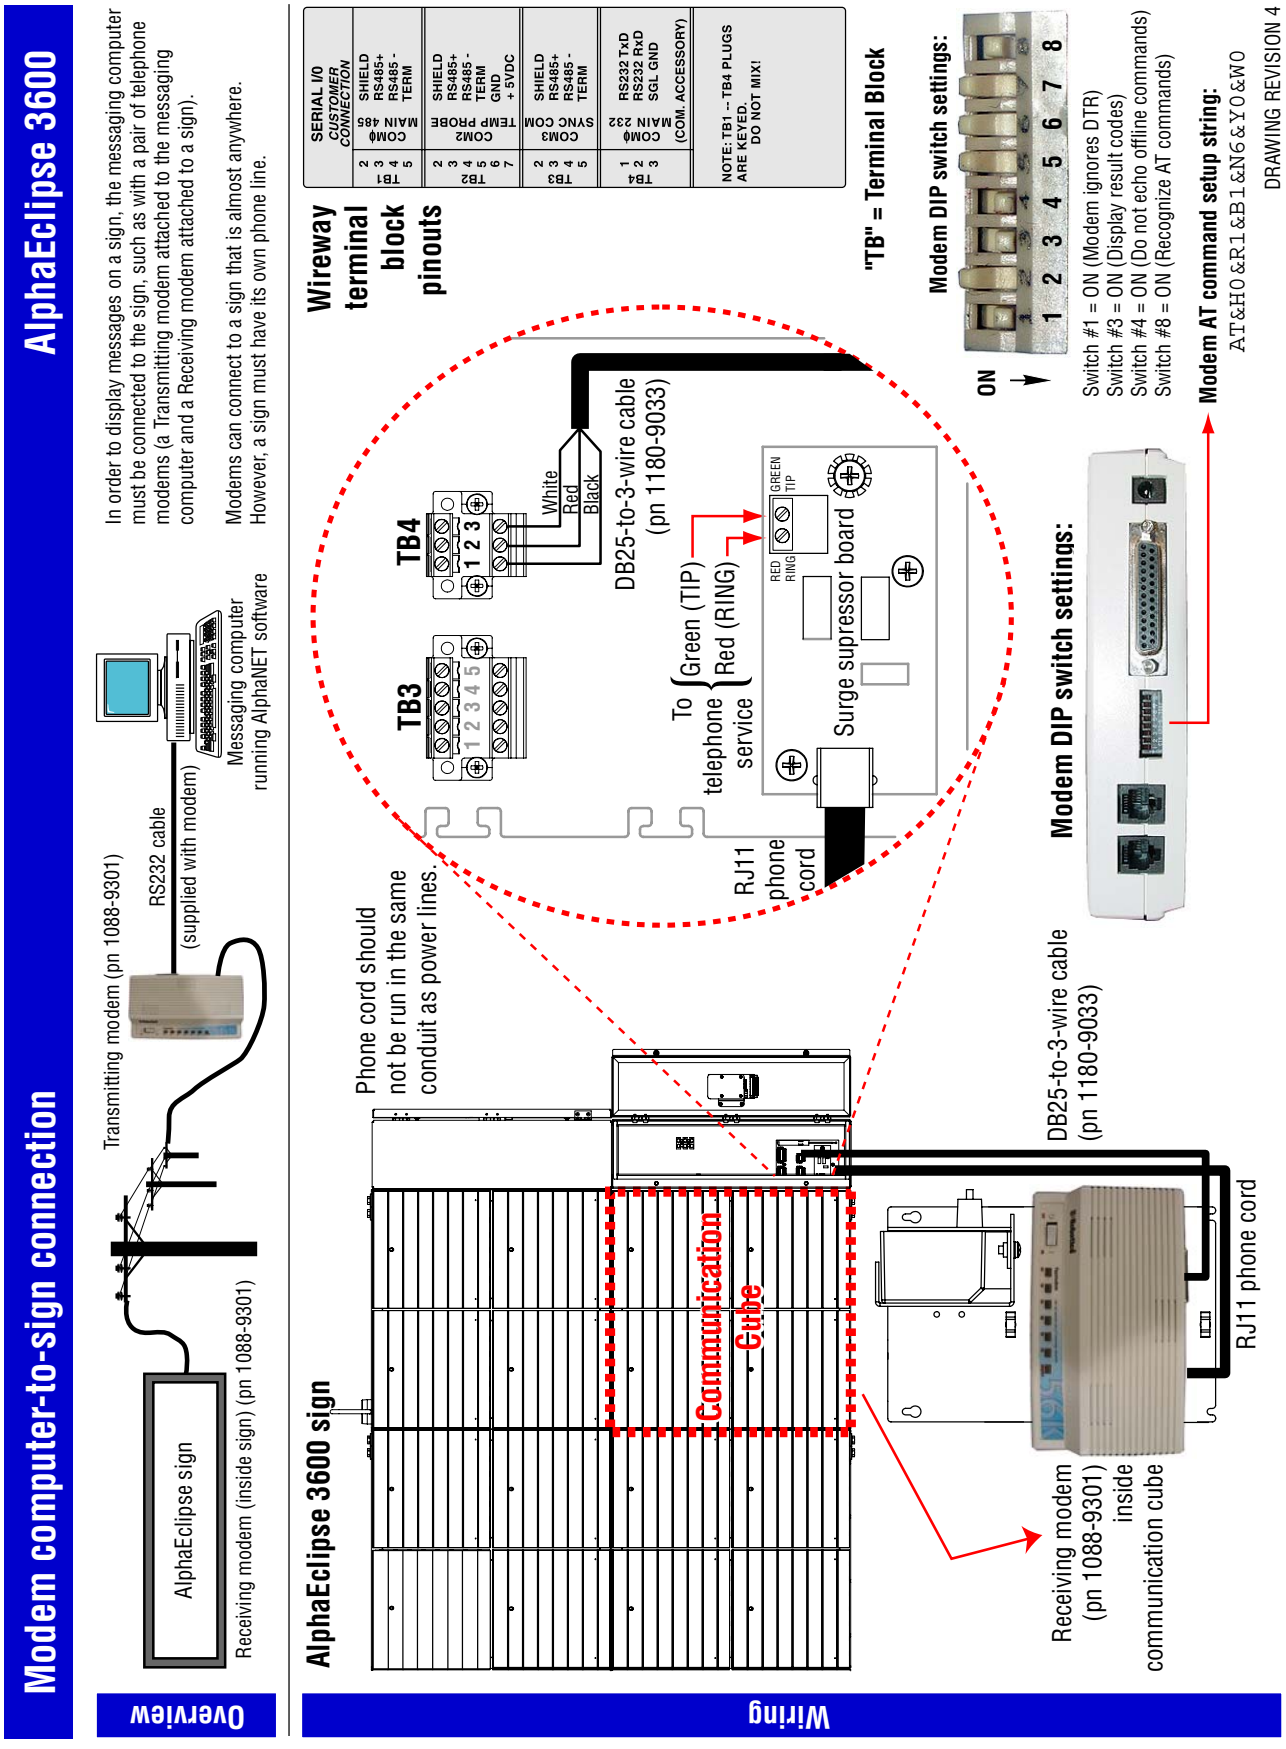

Fiber optic computer-to-sign connection

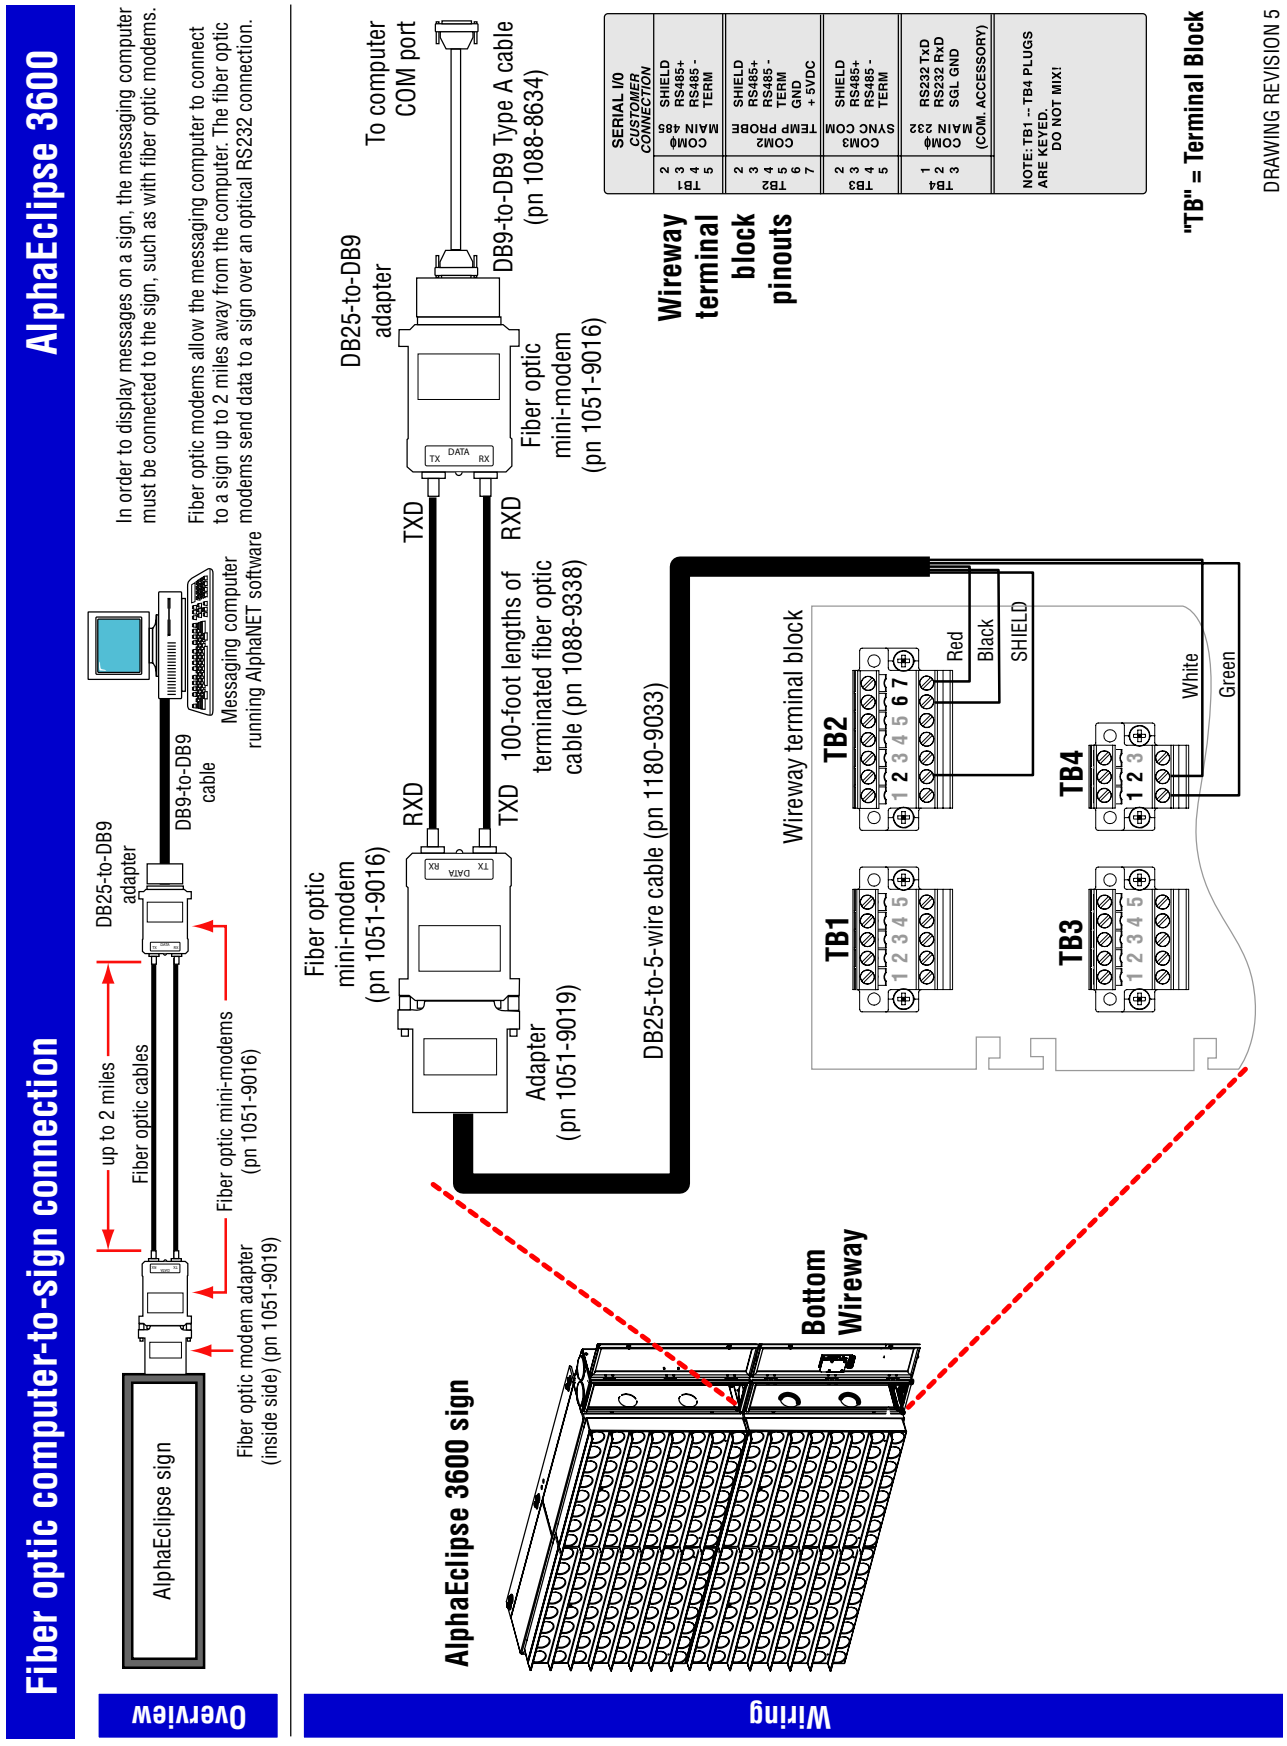

Wireless transceiver computer-to-sign connection (Locus)

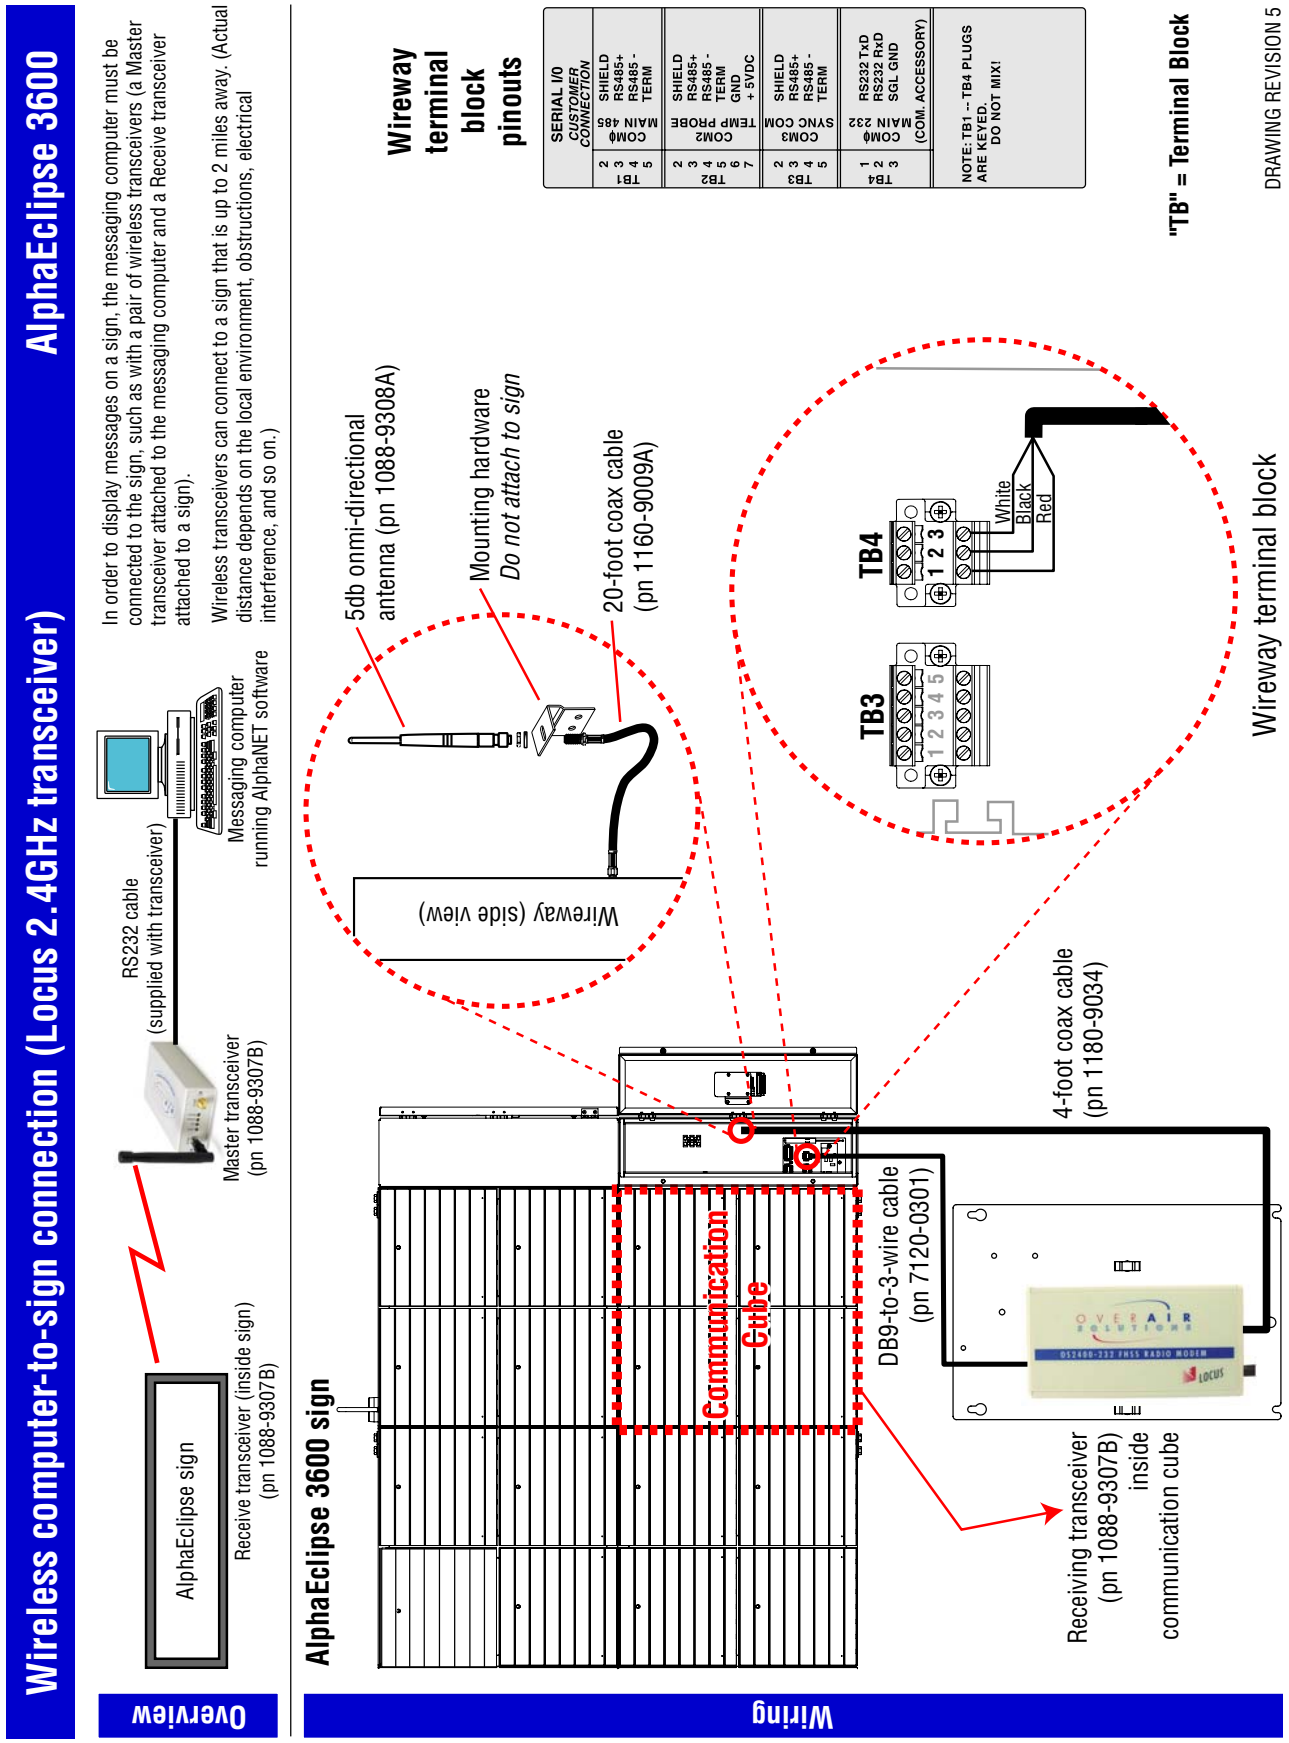

Wireless transceiver computer-to-sign connection (Alpha RF900)

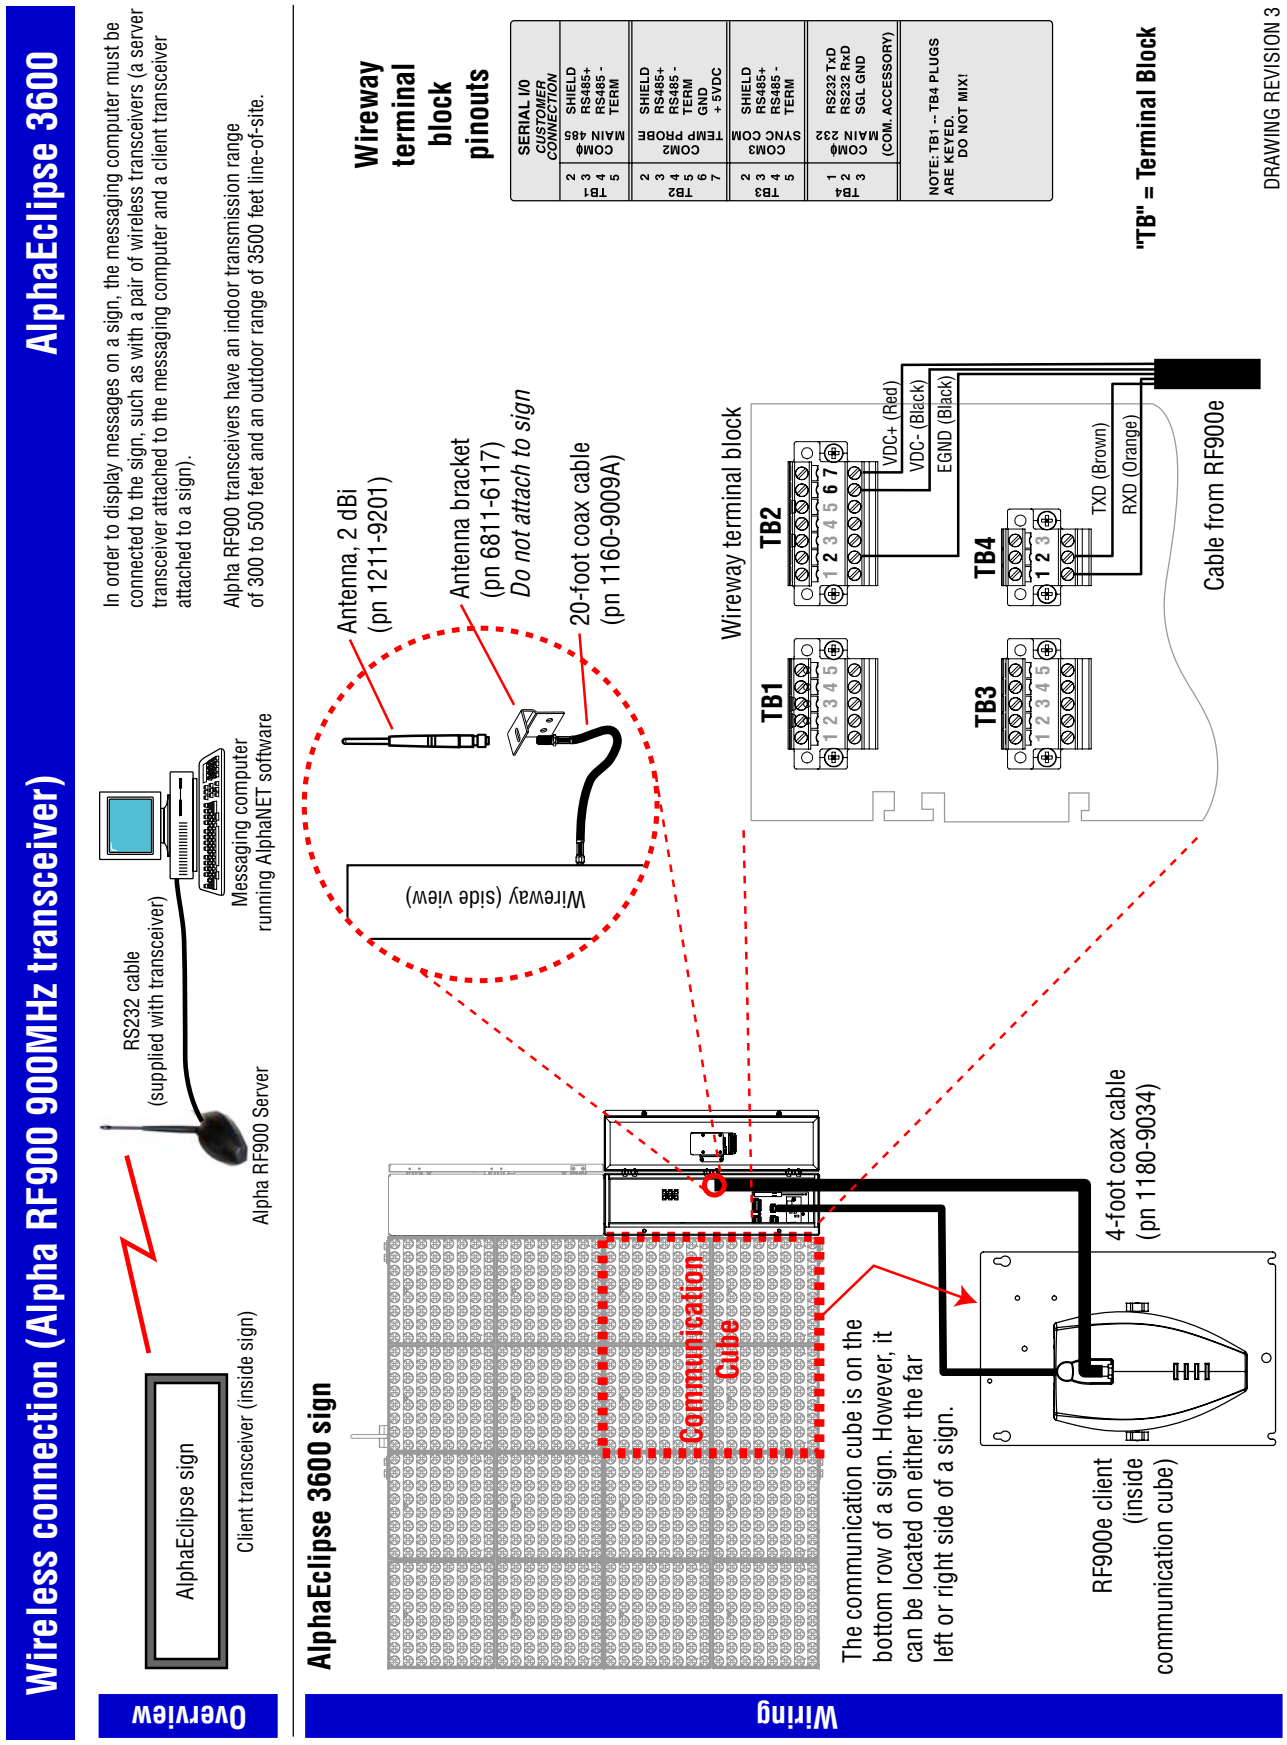

Appendix

Serial address of a sign

The serial address of a sign is a number used to identify one sign from another when messages are sent.

Each AlphaEclipse is factory programmed with a serial address. Though a sign's address can be changed, it is usually not necessary or desirable to do so.

There are two ways to determine a sign's serial address:

- METHOD 1: Look on the back of the sign's bottom wireway — a label similar to the following will identify a sign's serial address and whether the sign is set up as a Master, Secondary Master, or a Slave sign:

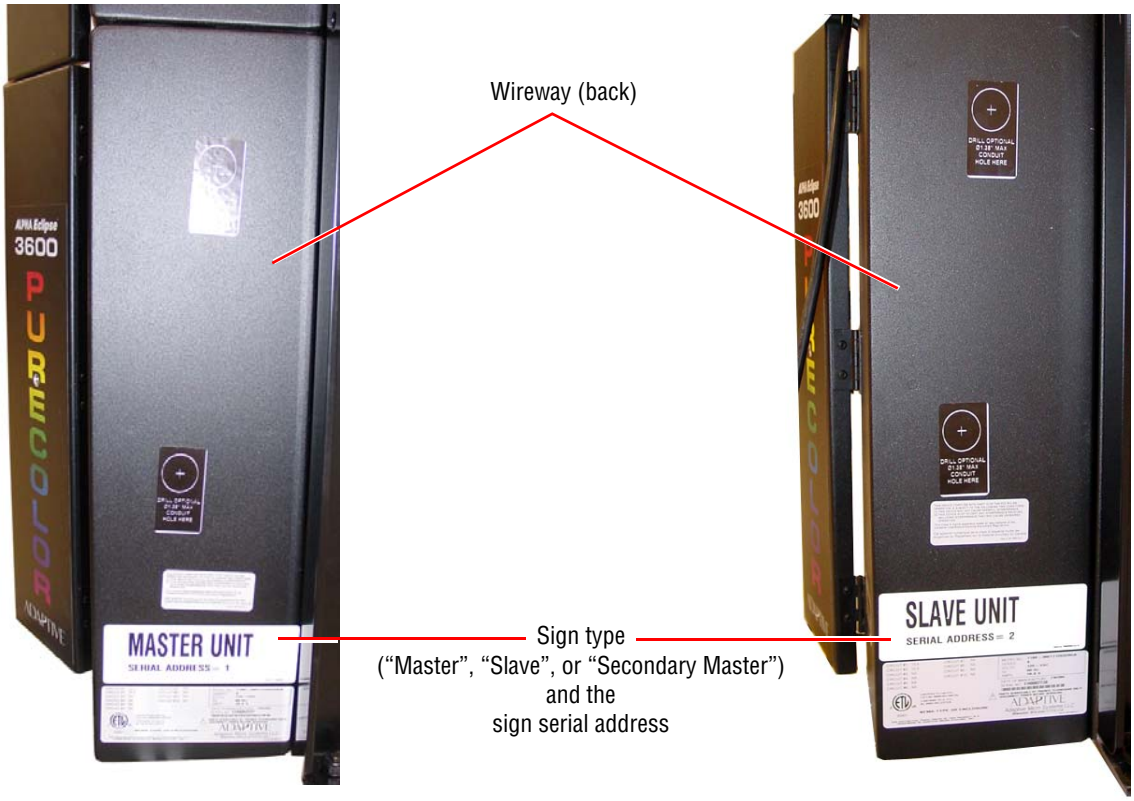

- METHOD 2: Remove power to the sign and then reapply power — a series of startup messages will appear on the sign. One of these messages will identify the sign's serial address and another whether a sign is a Master, Secondary Master, or a Slave sign.

Opening a sign

How to open a sign from the back

Ordinary, controller board, and communication cubes (see "Internal view" on page 8) are all opened from the back in the same way

1. Remove power from the sign.

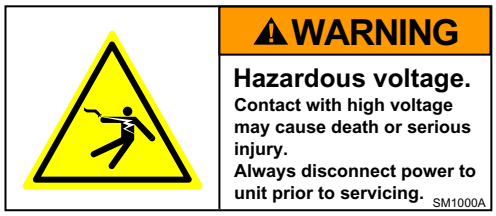

2. Use a 5/32-inch hex tool to loosen the two screws on the back a cube:

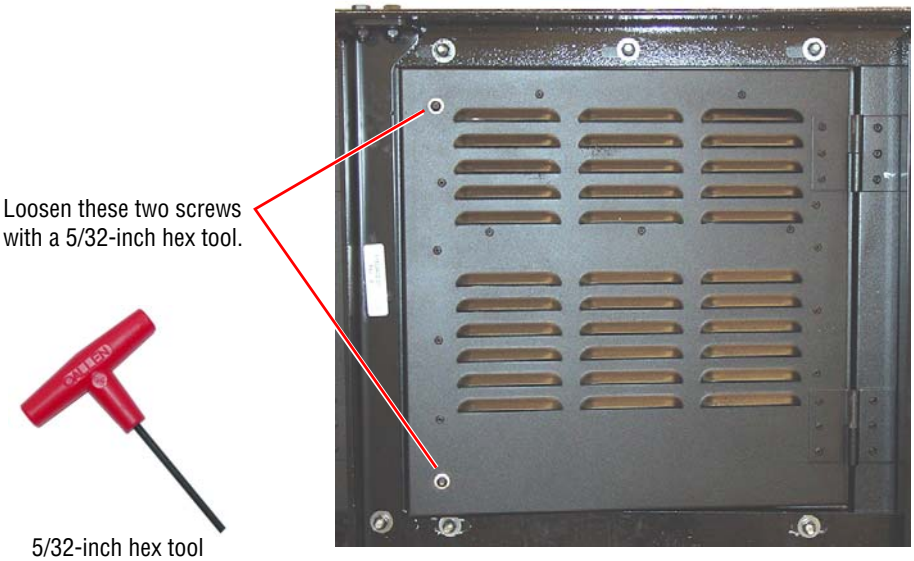

3. Open the cube door:

There are three types of sign cubes (see "Internal view" on page 8):

- ordinary
- controller (There is only one of these in a sign.)
- communication (There is only one of these in a sign.)

Shown on the left is a sign's controller cube.

Open a sign door slowly. Otherwise some of the cables attached to the door may snap off.

How to open a sign from the front

If it is not possible to open the back of the cube, remove the four LED modules from the front of the cube:

> A LED module *must* be put back into the *same* location from where it was removed.

1. Remove power from the sign.

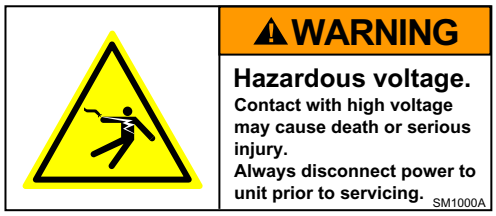

2. Locate the hex tool access hole in the LED module that is to be removed:

5/32-inch hex tool
(pn 6811-7076)

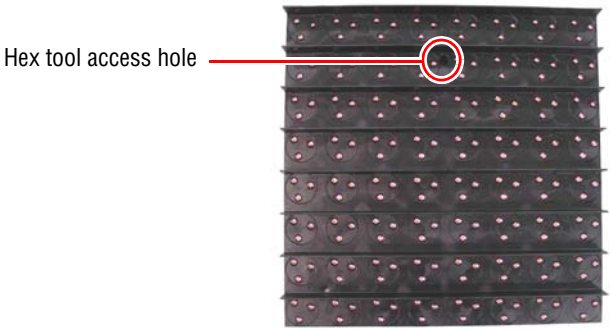

LED module

3. Insert the hex tool into the LED cube access hole. Turn counterclockwise to open the latch. Then lift the LED module up and pull it back and out of the LED module:

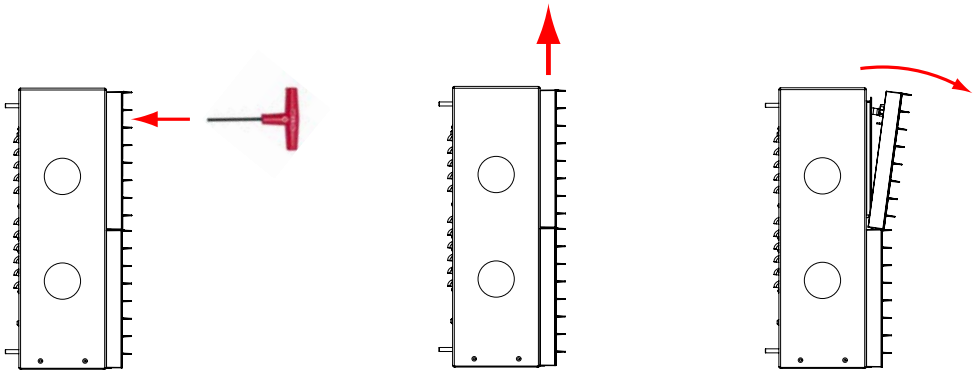

4. Unhook the data and the power cables from the back of the LED module. Then remove the LED module from the cube:

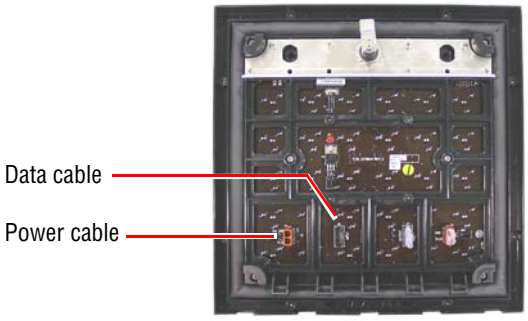

If more than one LED module is removed, keep track of the location of each module. Each LED module must be put back in its *original* location.

Also, each LED module has its own data and power cable.

The drawing on the right shows how LED modules are named.



FRONT VIEW

RS485 termination

What is RS485 termination?

When signs are connected together, it is necessary to terminate each end of the network. This is necessary to make sure that the signs communicate with each other.

If signs are *not* correctly terminated, messages could be displayed improperly.

When is termination used?

RULE: Terminate the first and last sign in a network:

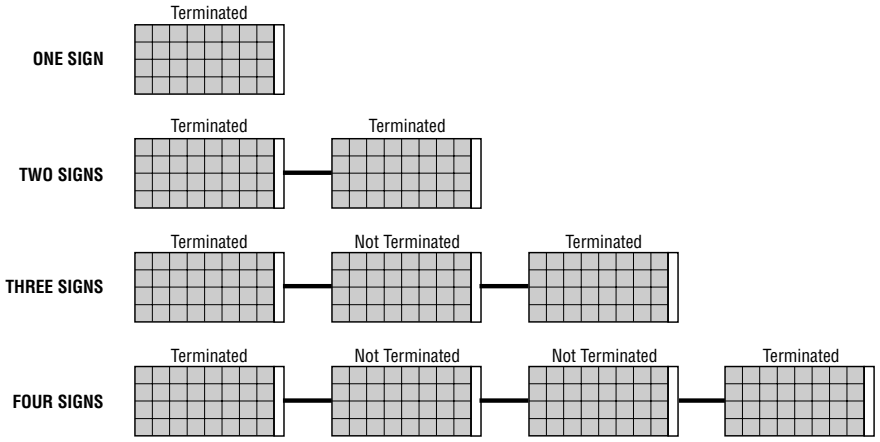

RULE: If a Converter Box III is used, treat the converter box as if it were a sign:

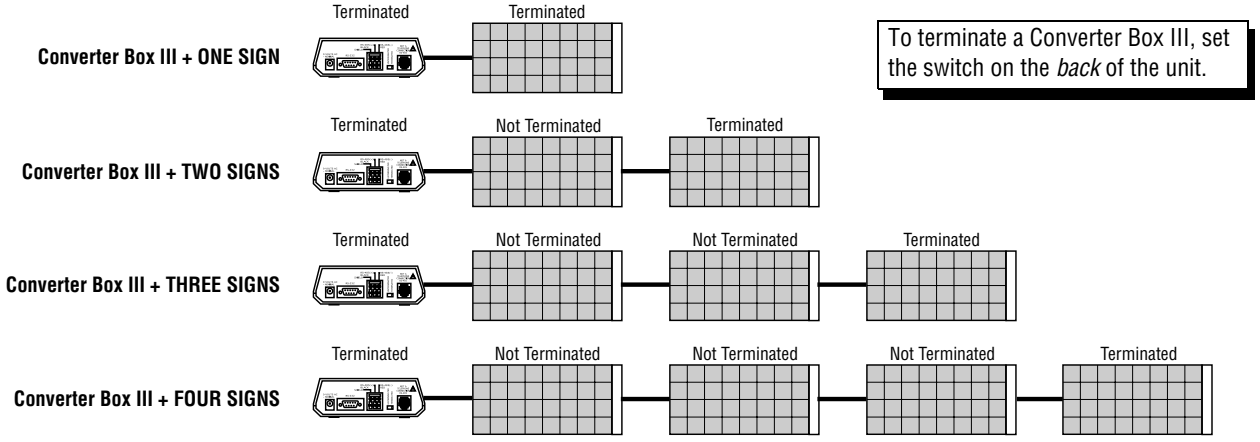

To terminate a Converter Box III, set the switch on the *back* of the unit.

How to terminate a sign

1. Remove power from the sign.

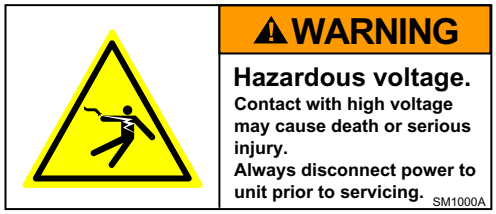

2. Locate the sign's controller cube (see "Internal view" on page 8).
3. On the sign that requires termination, open the controller cube using one of these two methods:
   - Open the cube *from the back* (see "How to open a sign from the back" on page 32).
   - Open the cube *from the front* (see "How to open a sign from the front" on page 33).
4. Attach a wire jumper to connector P14 terminals #4 and #5 on the sign's controller board:

   NOTE: To access the controller board, open the back of the cube (as shown below), or remove all four LED modules from the front of the cube (see "Opening a sign" on page 32).

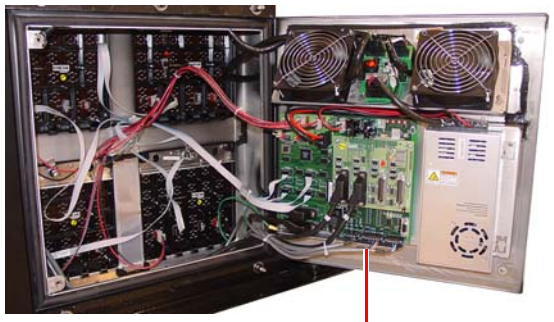

Controller board cube
(see "Internal view" on page 8 for the location of this cube in a sign)

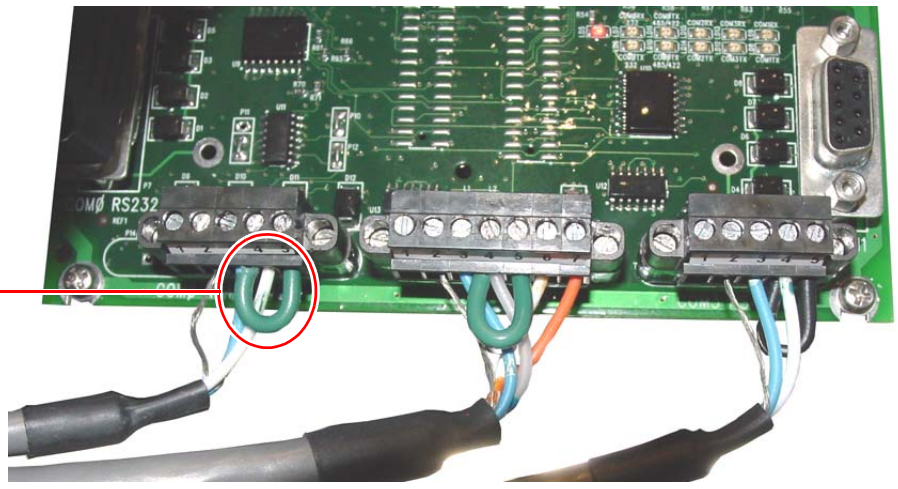

Termination jumper wire
Attach a wire to terminals #4 and #5 on connector P14 on the controller board.

Controller board



P14 COM0 RS485/422

Figure 6: Termination jumper wire

How to remove termination from a sign

1. Remove power from the sign.

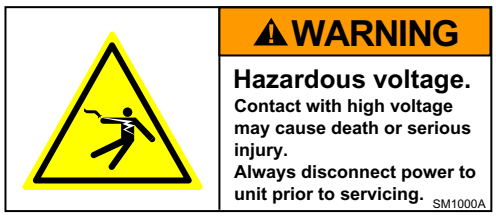

2. Locate the sign's controller cube (see "Internal view" on page 8).
3. On the sign that needs termination removed, open the controller cube using one of these two methods:
   - Open the cube *from the back* (see "How to open a sign from the back" on page 32).
   - Open the cube *from the front* (see "How to open a sign from the front" on page 33).
4. Remove the wire jumper that connects terminals #4 and #5 on connector P14 on the sign's controller board (see Figure 6 on page 35).

   NOTE: To access the controller board, open the back of the cube, or remove all four LED modules from the front of the cube (see "Opening a sign" on page 32).

Shop drawings

The following drawings are attached:

- 11800000-04 (1 sheet) — Single cube wiring diagram
- 11800000-05 (2 sheets) — Right wireway multi-cube wiring diagram
- 11800000-07 (5 sheets) — Mechanical and electrical installation
- 11800000-15 (1 sheet) — Multi-section sign, vertical split assembly
- 11800000-16 (1 sheet) — Multi-section sign, horizontal split assembly
- 11800000-17 (2 sheets) — Multi-section sign, vertical and horizontal split assembly
- 11800000-22 (2 sheets) — Left wireway multi-cube wiring diagram

Single cube wiring diagram (11800000-04, revision C)

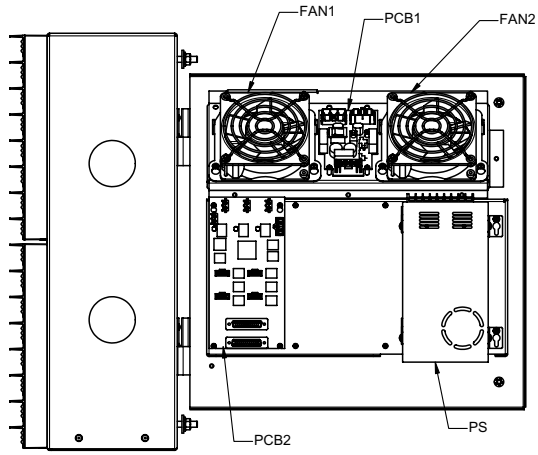

BACK PANEL DOOR
RIGHT SIDE VIEW

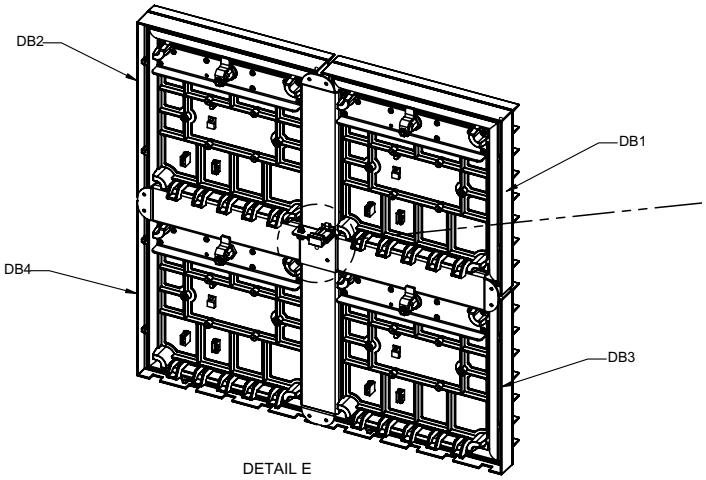

DETAIL E
DRIVER BOARDS
REAR TRIMETRIC VIEW



DETAIL A
AC ADAPTER BOARD (PCB1)
11809008
SCALE 1:2

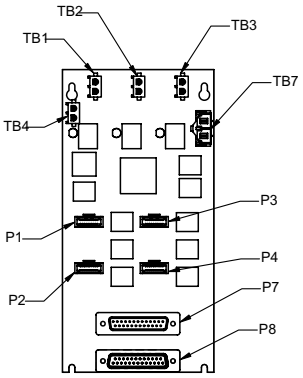

DETAIL B
TURBO ADAPTER BOARD (PCB2)
11809020/11809024
SCALE 1:2



DETAIL C
DRIVER BOARD (DB1-DB4)
11809016/11809017/11809019
SCALE 1:4

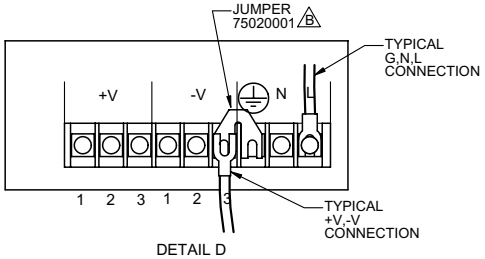

DETAIL D
POWER SUPPLY TERMINALS (PS)
40756201
SCALE 1:1

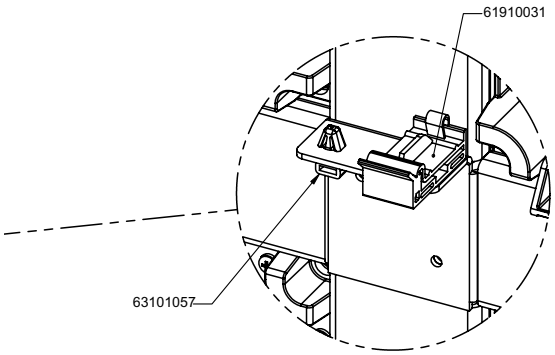

DETAIL F
SCALE 1 : 1

SINGLE CUBE WIRING

Door Wiring

Name	From	Via Wire No.	Via Color	Via Length	To	Detail	Comments
Fan AC	FAN1	FAN1 WIRE	BLK	12"	PCB1-P3	A	Bundle and tie wrap to appropriate fan.
	FAN2	FAN2 WIRE	BLK	12"	PCB1-P4	A	
Power Supply AC	PCB1-P5	71160406	RED	5"	PS-L	A,D	N/A
			WHT		PS-N	A,D	
			GRN		PS-GND	A,D	
Turbo Board DC	PCB2-TB7	71100201	RED	18"	PS-V+	B,D	N/A
			BLK		PS-V-	B,D	

Module Wiring

Name	From	Via Wire No.	Via Color	Via Length	To	Detail	Comments
Driver Board DC	PCB2-TB1	71160248	N/A	33"	DB1-P4	B,C,E,F	Bundle together with 63101057 (see Detail F). **Allow slack.**[2]
	PCB2-TB2	71160248	N/A	33"	DB2-P4	B,C,E,F	
	PCB2-TB3	71160248	N/A	33"	DB3-P4	B,C,E,F	
	PCB2-TB4	71160248	N/A	33"	DB4-P4	B,C,E,F	
Driver Board Turbo [1]	PCB2-P1	11809032-1	N/A	40"	DB1-P6	B,C,E,F	Bundle together with 61910031 (see Detail F). **Allow slack.**[2] Connect numbered end to PCB2 and lettered end to appropriate DB.
	PCB2-P2	11809032-2	N/A	40"	DB2-P6	B,C,E,F	
	PCB2-P3	11809032-3	N/A	40"	DB3-P6	B,C,E,F	
	PCB2-P4	11809032-4	N/A	40"	DB4-P6	B,C,E,F	

[1] **- NOTE: APPLY ANITOXIDANT GREASE (P/N 67000007) TO CONNECTIONS PRIOR TO INSERTION.**

[2] **- NOTE: DRIVER BOARD MUST BE ABLE TO BE REMOVED FROM THE FRONT AND DOOR MUST BE ABLE TO OPEN COMPLETELY WITHOUT PULLING ON THE CABLES.**

DEFINITIONS

TERM	*DESCRIPTION*
TB	TERMINAL BLOCK
PCB1	AC DISTRIBUTION BOARD
PCB2	TURBO ADAPTER BOARD
PCB3	THE TERMINATOR
PCB4	CONTROLLER BOARD
PCB5	TURBO DAUGHTER BRD (4CH)
PCB6	TURBO DAUGHTER BRD (8CH)
DB	DRIVER BOARD
L	LINE
C	COLUMN
W	WIREWAY
PS	POWER SUPPLY
AP	ACCESSORY PLATE
A/R	AS REQUIRED

REV.	DESCRIPTION	ECO	BY	DATE
C	UPDATED BORDER TEMPLATE	8744	RDM	9/14/2004
B	ADDED JUMPER 75029001 TO DETAIL D, UPDATED CONNECTOR DESIGNATIONS AND WIRING TABLE	8135	SSL	9/16/03
A	RELEASED FOR PRODUCTION	-	SAA	4/15/03

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED

.X	±0.1
.XX	±0.02
.XXX	±0.005
ANGLES	±1°

DESIGNED BY: SSL DATE: 4/15/03
DRAWN BY: SAA DATE: 4/15/03
APPROVED BY: DATE:

ADAPTIVE
Adaptive Micro Systems LLC 7840 North 86th Street Milwaukee, WI 53224 USA

TITLE: SINGLE-MOD WIRING P1180

SIZE: D DOCUMENT NO.: 11800000-04 REVISION: C
SCALE: 1:4 STATUS: Released SHT: 1 of 1

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

Right wireway multi-cube wiring diagram (11800000-05, revision E, sheet 1 of 2)

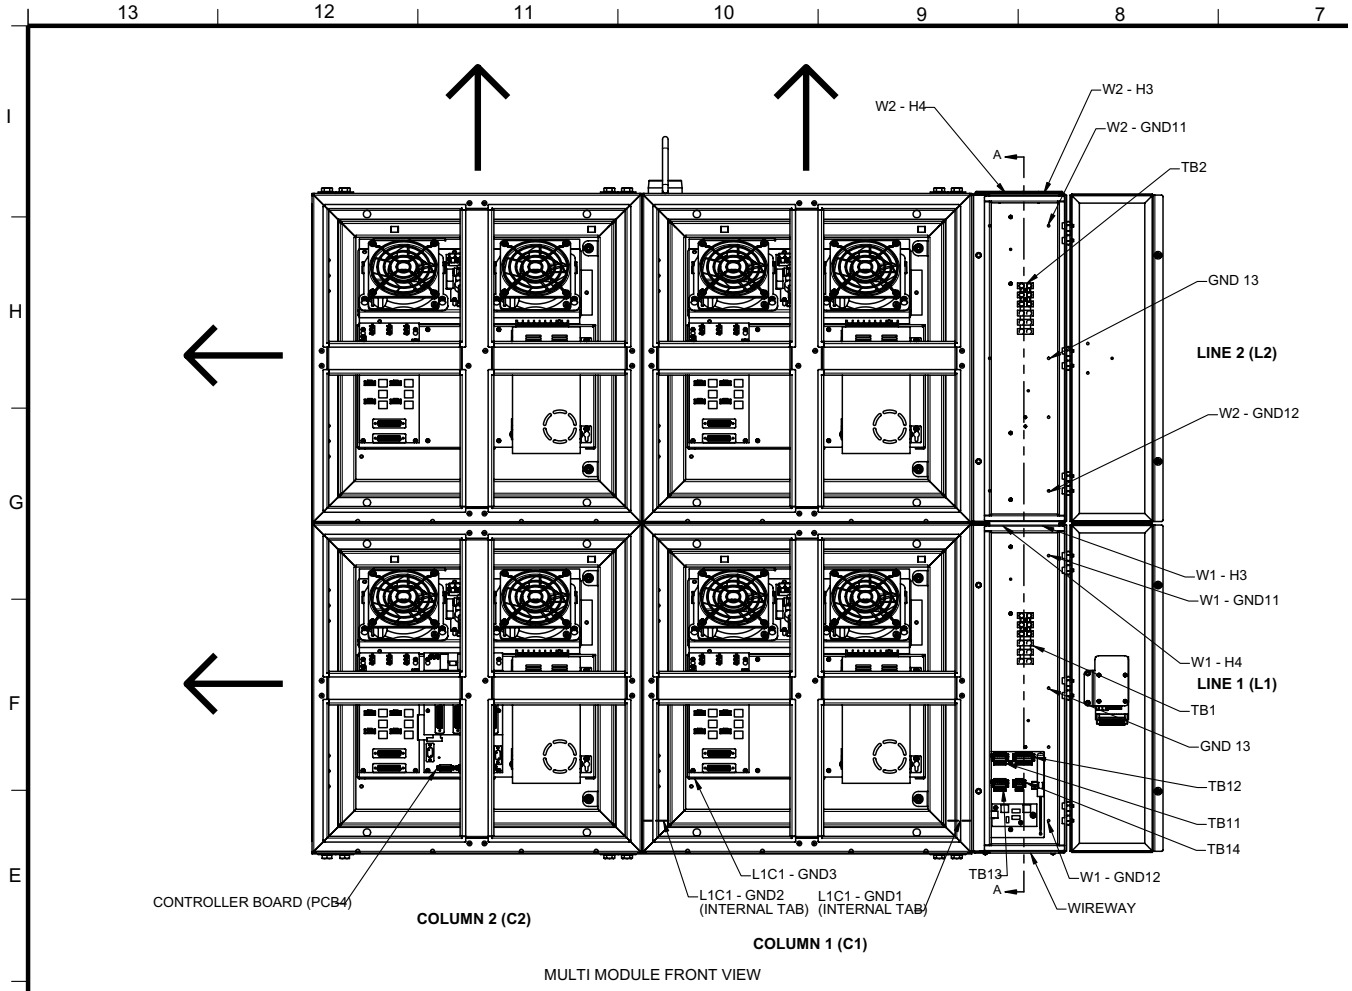

MULTI MODULE FRONT VIEW



DETAIL V
EIGHT CHANNEL CONTROLLER
TYPICAL WIRE ROUTING

NOTES:

1) ALL WIRES MUST BE ROUTED FROM THEIR ORIGIN TO THE HINGE AND THEN CONTINUE (AS SHOWN IN DETAIL B) TO ALLOW DOOR TO OPEN TO ITS FULLEST EXTENT.

2) ON COMPLETION OF WIRING, APPLY ANTI-CORROSION SPRAY (P/N 67010018) TO ALL AC ADAPTER BOARDS (P1-P5), ALL TERMINAL BLOCKS, CONTROLLER BOARD (P1), ALL POWER SUPPLY TERMINALS (PS), ALL TURBO BOARD CONNECTIONS (TB1-TB7 AS NEEDED), AND ALL DRIVER BOARD CONNECTIONS (P3-P4). BE CAUTIOUS NOT TO SPRAY ANY LABELS AS THE ANTI-CORROSION SPRAY WILL DAMAGE THE LABEL'S ADHESIVE. APPLY AS A FINE MIST ONLY OVER THE WIRE CRIMP (MORE IS NOT BETTER).

3) ALL GROUND CONNECTORS (GND1, GND2, AND GND3 IN EVERY MODULE) REQUIRE A STAR WASHER (P/N 61820017A) BETWEEN PANELS AND CONNECTORS AND BETWEEN TWO CONNECTORS. USE SCREW (P/N 61230641) FOR CONNECTIONS.

4) ALL GROUND CONNECTIONS (GND1 AND GND2 IN EVERY WIREWAY) REQUIRE A STAR WASHER (P/N 61820017A) BETWEEN PANELS AND CONNECTORS AND BETWEEN TWO CONNECTORS. USE NUT (P/N 61620025) FOR CONNECTIONS.

5) FOR AC WIRING USE AID 11800000-09 AND TABLE ON PAGE 2.

6) TIE WRAP TURBO AND AC WIRES IN WIREWAY AS NECESSARY. USE ANCHOR 63100029 WITH NUT 62512603 (SEE DETAIL M).

7) REMOVE PROTECTIVE CAP FROM PCB1-SW1.

8) APPLY RTV (P/N 66000002) TO PCB1-P2 (UNUSED TERMINAL PINS) ON THE LEFT END CUBE.

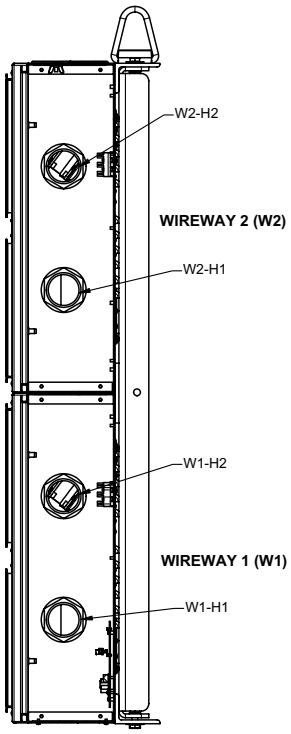

SECTION A-A
SCALE 1 : 5

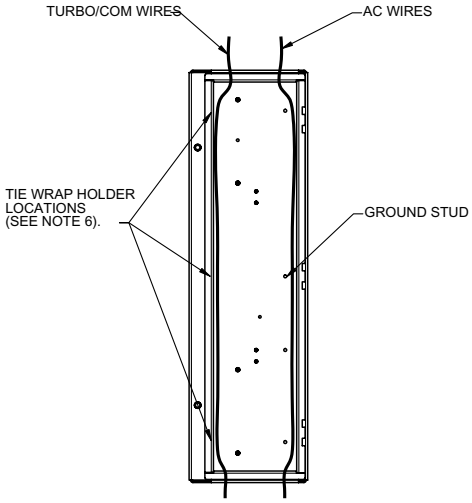

DETAIL M
TYPICAL WIRING-WIREWAY
FRONT VIEW



DETAIL V
FOUR CHANNEL CONTROLLER
TYPICAL WIRE ROUTING

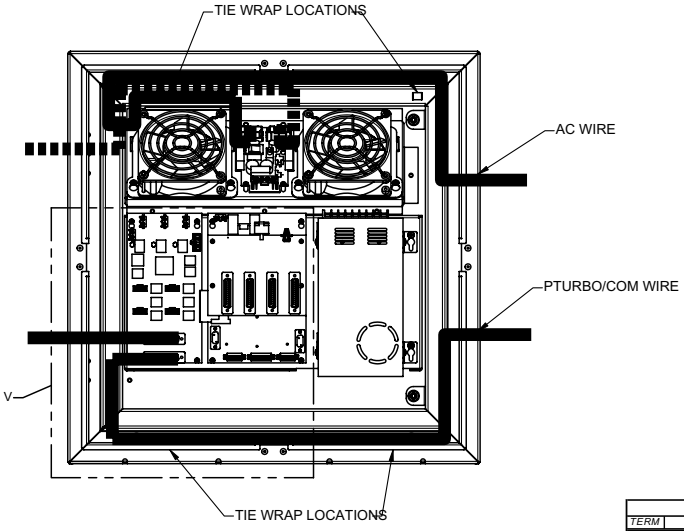

DETAIL B
SINGLE CUBE
FRONT VIEW

DEFINITIONS	
TERM	*DESCRIPTION*
TB	TERMINAL BLOCK
PCB1	AC DISTRIBUTION BOARD
PCB2	TURBO ADAPTER BOARD
PCB3	THE TERMINATOR
PCB4	CONTROLLER BOARD
PCB5	TURBO DAUGHTER BRD (4CH)
PCB6	TURBO DAUGHTER BRD (8CH)
DB	DRIVER BOARD
L	LINE
C	COLUMN
W	WIREWAY
PS	POWER SUPPLY
AP	ACCESSORY PLATE
A/R	AS REQUIRED

REV.	DESCRIPTION	ECO	BY	DATE
E	UPDATED BORDER TEMPLATE	8744	RD M	9/14/2004
D	UPDATE INTERCUBE WIRING TABLE ON SHEET 2	8570	SSL	2/26/04
C	ADDED NOTE FRO GND 13, ADD NOTE 8, ADD LOCATION NOTE FOR ACESSORY PLATE INSTALLATION	8359	SSL	11/20/03
B	UPDATE TERMINAL BLOCK DETAILS, UPDATE WIRING TABLES, CHANGE DETAIL C, ADDED JUMPER TO DETAIL U, ADDED DETAILS R, S, T, U AND V.	8135	SSL	9/16/03
A	RELEASED FOR PRODUCTION	-	SSL	5/28/03

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED
.X ±0.1
.XX ±0.02
.XXX ±0.005
ANGLES ±1°

DESIGNED BY: SSL DATE: 5/2/03
DRAWN BY: SAA DATE: 5/2/03
APPROVED BY: DATE:

ADAPTIVE
Adaptive Micro Systems LLC © 9 North 88th Street Wauwatosa, WI 53224 USA

TITLE: MULTI-MOD WIRING P1180

SIZE: D | DOCUMENT NO.: 11800000-05 | REVISION: E

SCALE: 1:4 | STATUS: Released | SHT: 1 of 2

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

Right wireway multi-cube wiring diagram (11800000-05, revision E, sheet 2 of 2)

INTERCUBE WIRING

Module-to-Module

Name	From Module No.	From Name	Via Wire No.	Via Color	Via Length	To Module No.	To Name	Detail
DTurbo	LxCx	PCB2-P7	71240901	N/A	40"	LxCy	PCB2-P8	F,B
Safety Ground	Wx	GND11	71120116	GRN/YLW	13"	Wy	GND12	Note 3,4
	LxCx	GND3	71120116	GRN/YLW	13"	LxCx	GND2	
	LxCx	GND2	71120116	GRN/YLW	13"	LxCy	GND1	

Controller Board/Wireway

Name	From Module No.	From Name	Via Wire No.	Via Color	Via Length	To Module No.	To Name	Detail
Controller Board DC	L1C2	PCB4-P1	71160249	RED	16"	L1C2	PS-V+	G,Q
				BLK			PS-V-	G,Q
Dturbo[1]	L1C2	PCB5/6-P1	71240901	N/A	40"	L1C1	PCB2-P8	H,L,F
	L1Cz	PCB3-P1	N/A	N/A	N/A	L1Cz	PCB2-P7	F,J
	L1C2	PCB5/6-P2	71241802	N/A	114"	L2C1	PCB2-P8	H,L,F
	L2Cz	PCB3-P1	N/A	N/A	N/A	L2Cz	PCB2-P7	F,J
	L1C2	PCB5/6-P3	71241803	N/A	138"	L3C1	PCB2-P8	H,L,F
	L3Cz	PCB3-P1	N/A	N/A	N/A	L3Cz	PCB2-P7	F,J
	L1C2	PCB5/6-P4	71241805	N/A	162"	L4C1	PCB2-P8	H,L,F
	L4Cz	PCB3-P1	N/A	N/A	N/A	L4Cz	PCB2-P7	F,J
	L1C2	PCB6-P5	71241806	N/A	186"	L5C1	PCB2-P8	L,F
	L5Cz	PCB3-P1	N/A	N/A	N/A	L5Cz	PCB2-P7	F,J
COM0[2]	L1C2	PCB4-P14	71220501	N/A	75"	W1	TB11	G,C,B
COM2[2]	L1C2	PCB4-P15	71220708	N/A	75"	W1	TB12	G,C,B
COM3[2]	L1C2	PCB4-P16	71220501	N/A	75"	W1	TB13	G,C,B
COM0 (RS232)[2]	L1C2	PCB4-P7	71200302	BLK	75"	W1	TB14-A1	G,C,B
				RED			TB14-A2	G,C,B
				WHT			TB14-A3	G,C,B
Photocell	W1	PCB7-P1	71220708	N/A	24"	W1	TB12	C,S

1 - NOTE: CONNECT AS NECESSARY. ALL AVAILABLE LINES MUST BE CONNECTED
2 - NOTE: REFER TO DETAIL P FOR CONTROLLER TERMINAL BLOCK DETAIL.
x - NOTE: DENOTES ONE OF SEVERAL CONSECUTIVE ITEMS (I.E. L1Cx COULD REPRESENT L1C1, L1C2, ETC.).
y - NOTE: DENOTES AN ITEM ONE GREATER THAN AN ITEM DESIGNATED BY AN "x" IN THE SAME LINE.
z - NOTE: DENOTES THE FAR LEFT CUBE (WHEN VIEWED FROM FRONT).

AC WIRING[1]

Name	From Wireway Module No.	From Wireway Name	Via Wire No.	Via Color	Via Length	To Sign Modules Module No.	To Sign Modules Name	Detail
Module-to-Wireway	*	TBx-A1-HI/LO	71120301	BLK	50"	*	PCB1-P1	D,E,M,N
		TBx-A2-HI/LO		WHT				
		TBx-A3-HI/LO		GRN				
Accessory Plate	*	TBx-A1-HI/LO	71120303	BLK	A/R	*	AP-TB1-A1	D,K,B,N
		TBx-A2-HI/LO		WHT			AP-TB1-A2	
		TBx-A3-HI/LO		GRN			AP-TB1-A3	
	*	AP-TB1-B1	71120301	BLK	A/R	*	PCB1-P2	D,K,E,N
		AP-TB1-B2		WHT				
		AP-TB1-B3		GRN				
Wireway-to-Wireway	*	TBx-A1-HI/LO	71120303	BLK	A/R	*	TBy-B1-HI/LO	D,M,N
		TBx-A2-HI/LO		WHT			TBy-B2-HI/LO	
		N/C		GRN	N/C[2]		N/C	
Module-to-Module	*	PCB1-P2	71120302	N/A	A/R	*	PCB1-P1	E,B
TB Ground	Wx	TBx-A3-HI/LO	71120116	GRN/YLW	A/R	Wx	GND13	D

1 - NOTE: REFER TO AID 11800000-09 FOR DETAILED INTERCONNECTION DIAGRAMS
2 - NOTE: CUT WIRE DOWN TO OUTER INSULATION
x - NOTE: DENOTES ONE OF SEVERAL CONSECUTIVE ITEMS (I.E. L1Cx COULD REPRESENT L1C1,
y - NOTE: DENOTES AN ITEM ONE GREATER THAN AN ITEM DESIGNATED BY AN "x" IN THE SAME LINE.

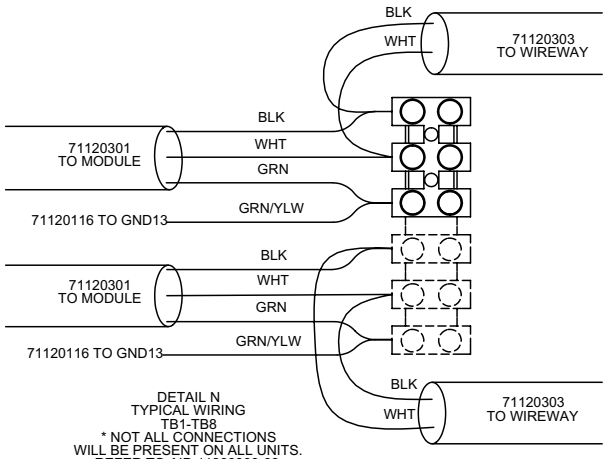

DETAIL N
TYPICAL WIRING
TB1-TB8
* NOT ALL CONNECTIONS WILL BE PRESENT ON ALL UNITS. REFER TO AID 11800000-09.



DETAIL P
DRIVER BOARD (DB1-DB4)
11809016/11809017/11809019
SCALE 1:4

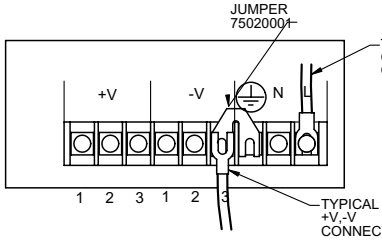

DETAIL Q
POWER SUPPLY TERMINALS (PS)
40756201
SCALE 1:1



DETAIL C
LIGHT SENSOR (PCB7)
11809022
SCALE 1:2



DETAIL D
3 OR 6 POS TB
TB1-TB8, AP-TB1



DETAIL E
AC ADAPTER BOARD (PCB1)
11809008

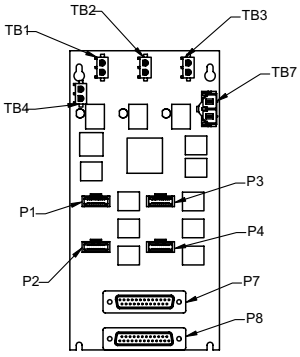

DETAIL F
TURBO ADAPTER BOARD (PCB2)
11809020/11809024

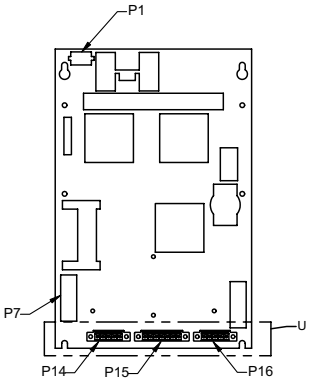

DETAIL G
4 CHANNEL
CONTROLLER BOARD (PCB4)
11809011

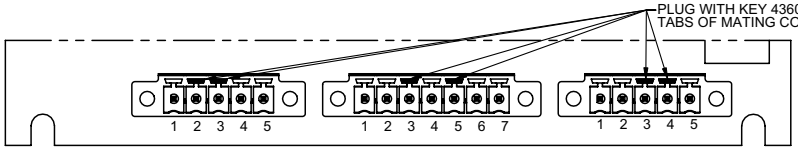

DETAIL U
SCALE 2 : 1

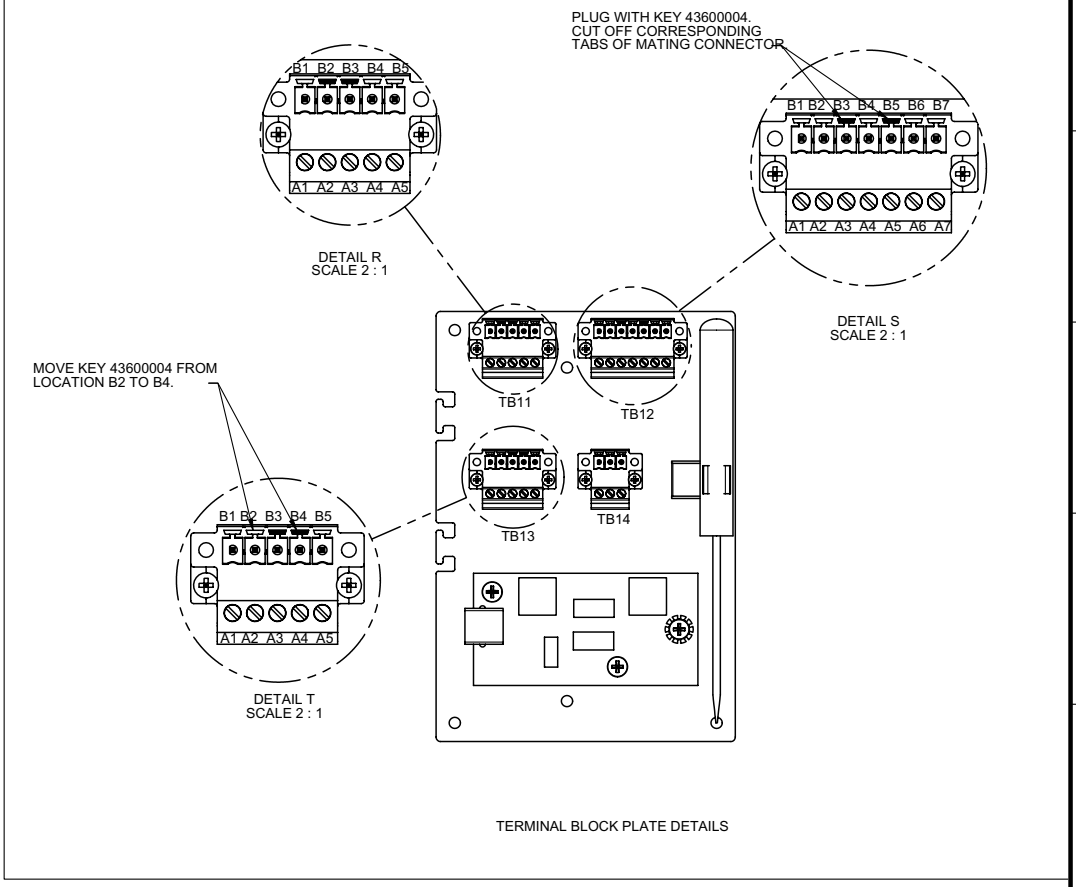

TERMINAL BLOCK PLATE DETAILS



DETAIL H
4 CHANNEL TURBO
DAUGHTER BOARD (PCB5)
11809014



DETAIL J
THE TERMINATOR (PCB3)
11809021



DETAIL K
ACCESSORY PLATE (AP)
68118089
INSTALL USING 4X SCREW 61230696
INTO CONTROLLER BAORD LOCATION.
REFER TO AID 11800000-09 FOR MODULE LOCATION.



DETAIL L
8 CHANNEL TURBO
DAUGHTER BOARD (PCB6)
11809023

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED:
.X ±0.1
.XX ±0.02
.XXX ±0.005
ANGLES ±1°

DESIGNED BY: SSL DATE: 5/2/03
DRAWN BY: SAA DATE: 5/2/03
APPROVED BY: DATE:

ADAPTIVE
Adaptive Micro Systems LLC.C 10 North 86th Street Milwaukee, WI 53224 USA

TITLE: MULTI-MOD WIRING P1180

SIZE: D | DOCUMENT NO.: 11800000-05 | REVISION: E

SCALE: 1:4 | STATUS: Released | SHT 2 of 2

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

Mechanical installation (11800000-07 revision F, sheet 1 of 5)

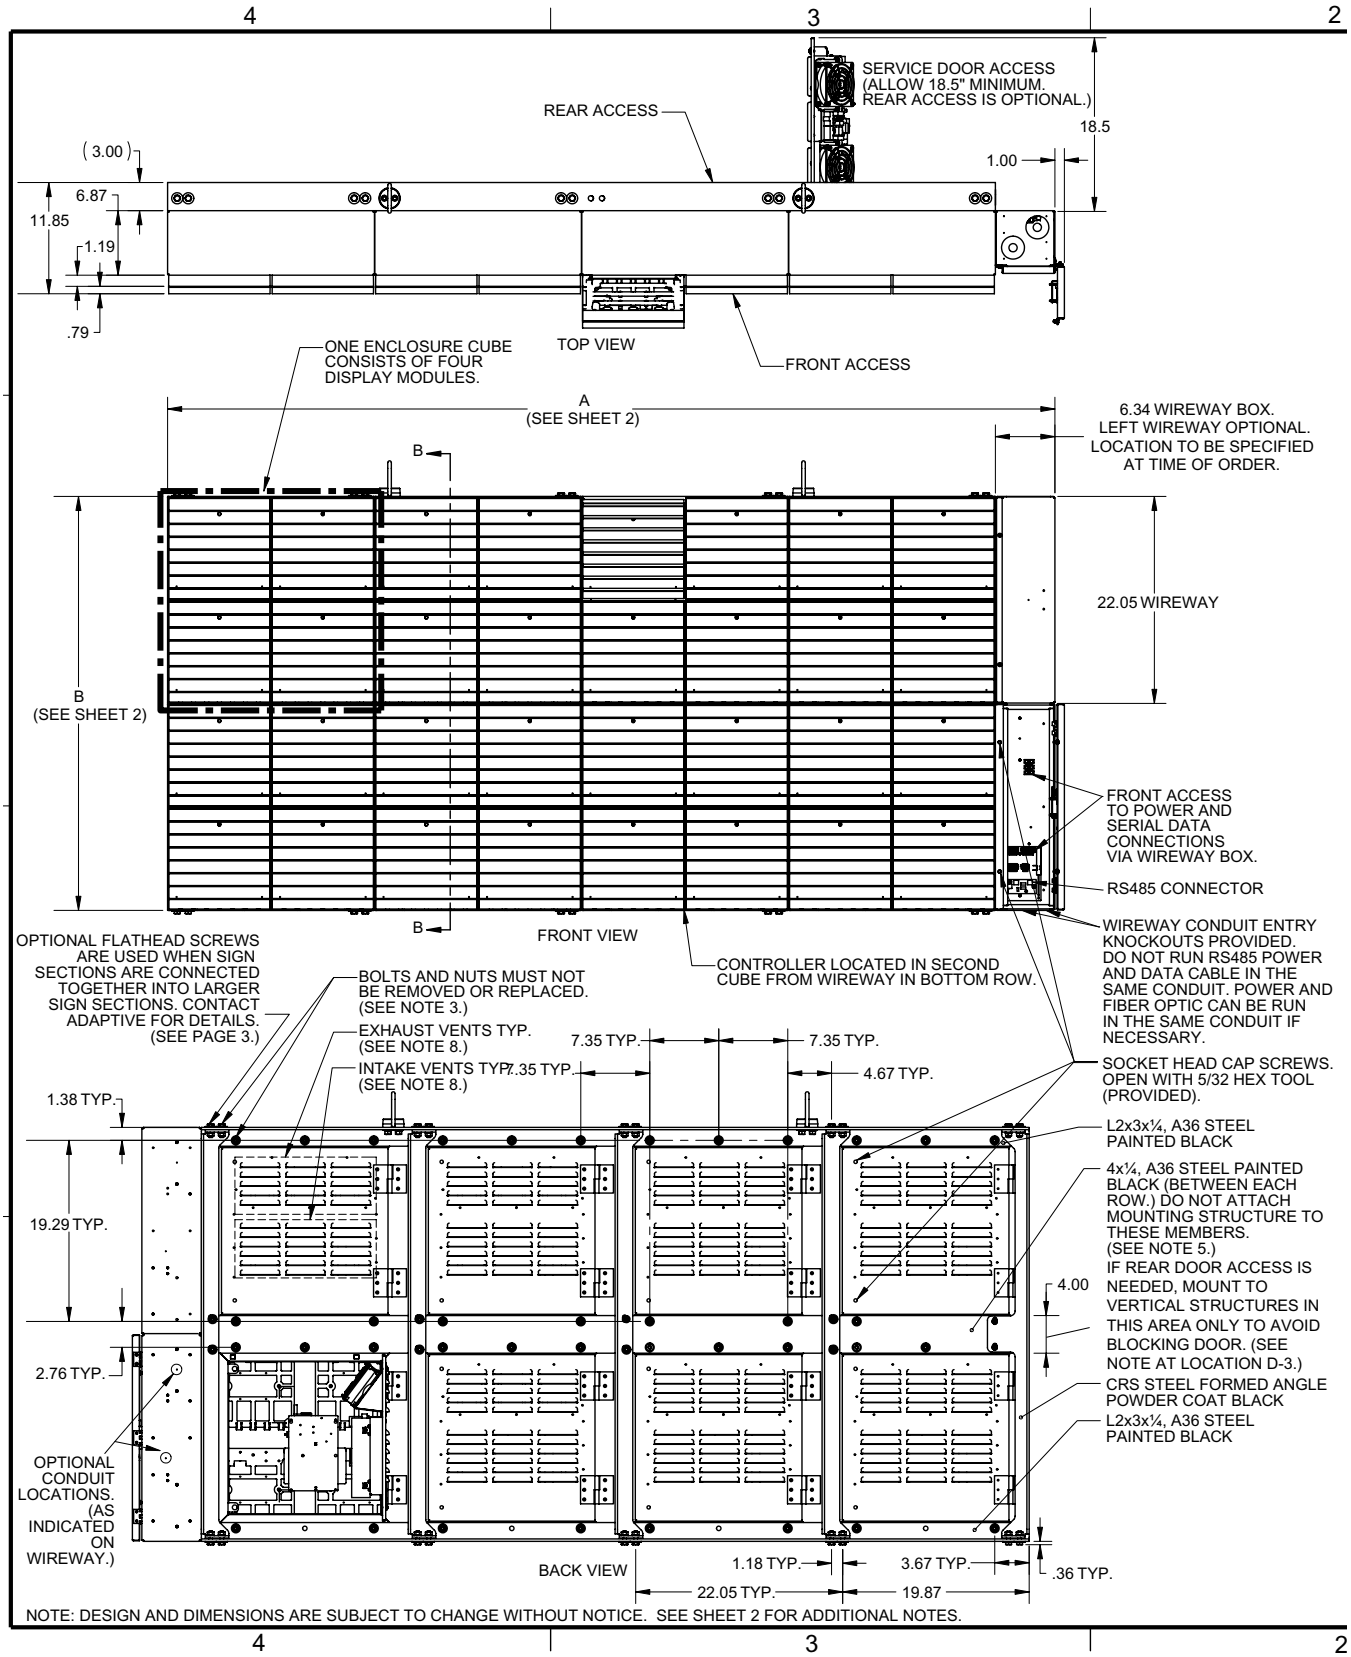

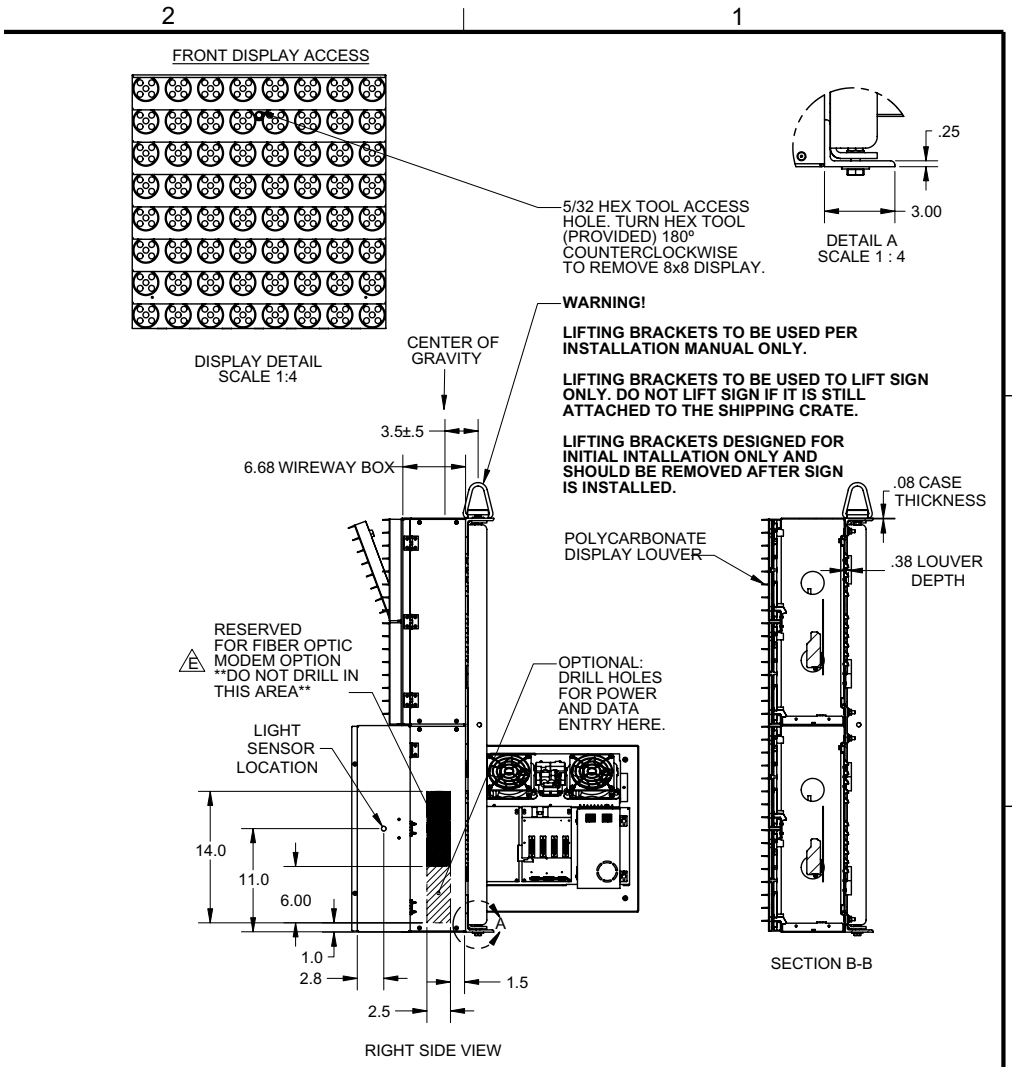

NOTES:

1) REFER TO INSTALLATION MANUAL FOR POWER AND ADDITIONAL INSTALLATION REQUIREMENTS.
2) THE ONLY SERVICE TOOLS REQUIRED ARE A #2 PHILLIPS SCREWDRIVER, 5/32 HEX TOOL (PROVIDED), AND A TECHNICIANS SLOTTED BLADE SCREWDRIVER (PROVIDED).
3) REMOVAL OF ANY FASTENERS OR OTHER NOTED PARTS WILL NEGATE THE PRODUCT WARRANTY.
4) ALL FASTENERS ARE METRIC A2 STAINLESS STEEL.
5) USE ONLY TOP AND BOTTOM ANGLE OR VERTICAL ANGLES TO MOUNT SIGN DIRECTLY TO SUPERSTRUCTURE. ALL INSTALLATIONS, SUPERSTRUCTURE DESIGNS, AND CONNECTIONS MUST BE DESIGNED/APROVED BY A QUALIFIED STRUCTUAL ENGINEER. CALL ADAPTIVE MICRO SYSTEMS AT 1-800-558-7022 FOR STRUCTURAL ENGINEERING CONSULTANT CONTACT INFORMATION.
6) DUE TO STREGTH LIMITATION OF DISPLAY SUBSTRUCTURE, LARGER SIGNS WILL REQUIRE MULTIPLE DISPLAY SECTIONS. DISPLAY SECTION SIZE WILL BE OPTIMIZED FOR PRODUCTION YIELD AND MAY VARY WITH EACH SIGN. (SEE SHEET 3.)
7) DESIGN AND DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
8) IF SIGN IS BUILT INTO AN ENCLOSED STRUCTURE, INTAKE AND EXHAUST AIR SHALL BE PROPERLY VENTED TO PREVENT MIXING AND RECIRCULATION OF EXHAUST AIR WITH THE INTAKE AIR.

REV.	DESCRIPTION	ECO	BY	DATE
F	UPDATED BORDER TEMPLATE	8744	RDM	9/13/2004
E	ADDED FIBER OPTIC NOTE FOR DRILLING	8642	DRZ	3/11/04
D	ADDED NOTE 8 TO SHEET 1	8622	SSL	3/1/04
C	CHANGE DIMESNION "A" TO INCLUDE WIREWAY	8541	SSL	2/3/04
B	ADD ELECTRICAL REQUIREMENTS TO SHEETS 4 AND 5. UPDATE WEIGHTS IN CHART ON SHEET 2.	8526	SSL	1/22/04
A	RELEASED FOR PRODUCTION. ADDED SHEET 3 FROM REV P05. MODIFIED NOTES AND TABLE ON SHEET 2.	-	SSL	9/4/03

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED
.X ±0.1
.XX ±0.02
.XXX ±0.005
ANGLES ±1°

DESIGNED BY: SSL DATE: 9/14/03
DRAWN BY: SSL DATE: 9/14/03
APPROVED BY: DATE:

ADAPTIVE Adaptive Micro Systems LLC 7840 North 86th Street Milwaukee, WI 53224 USA

TITLE: ALPHA ECLIPSE 3600 MECHANICAL DETAILS

SIZE: C | DOCUMENT NO.: 11800000-07 | REVISION: F

SCALE: 1:10 | STATUS: Released | SHT 1 of 5

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

Mechanical installation (11800000-07 revision F, sheet 2 of 5)

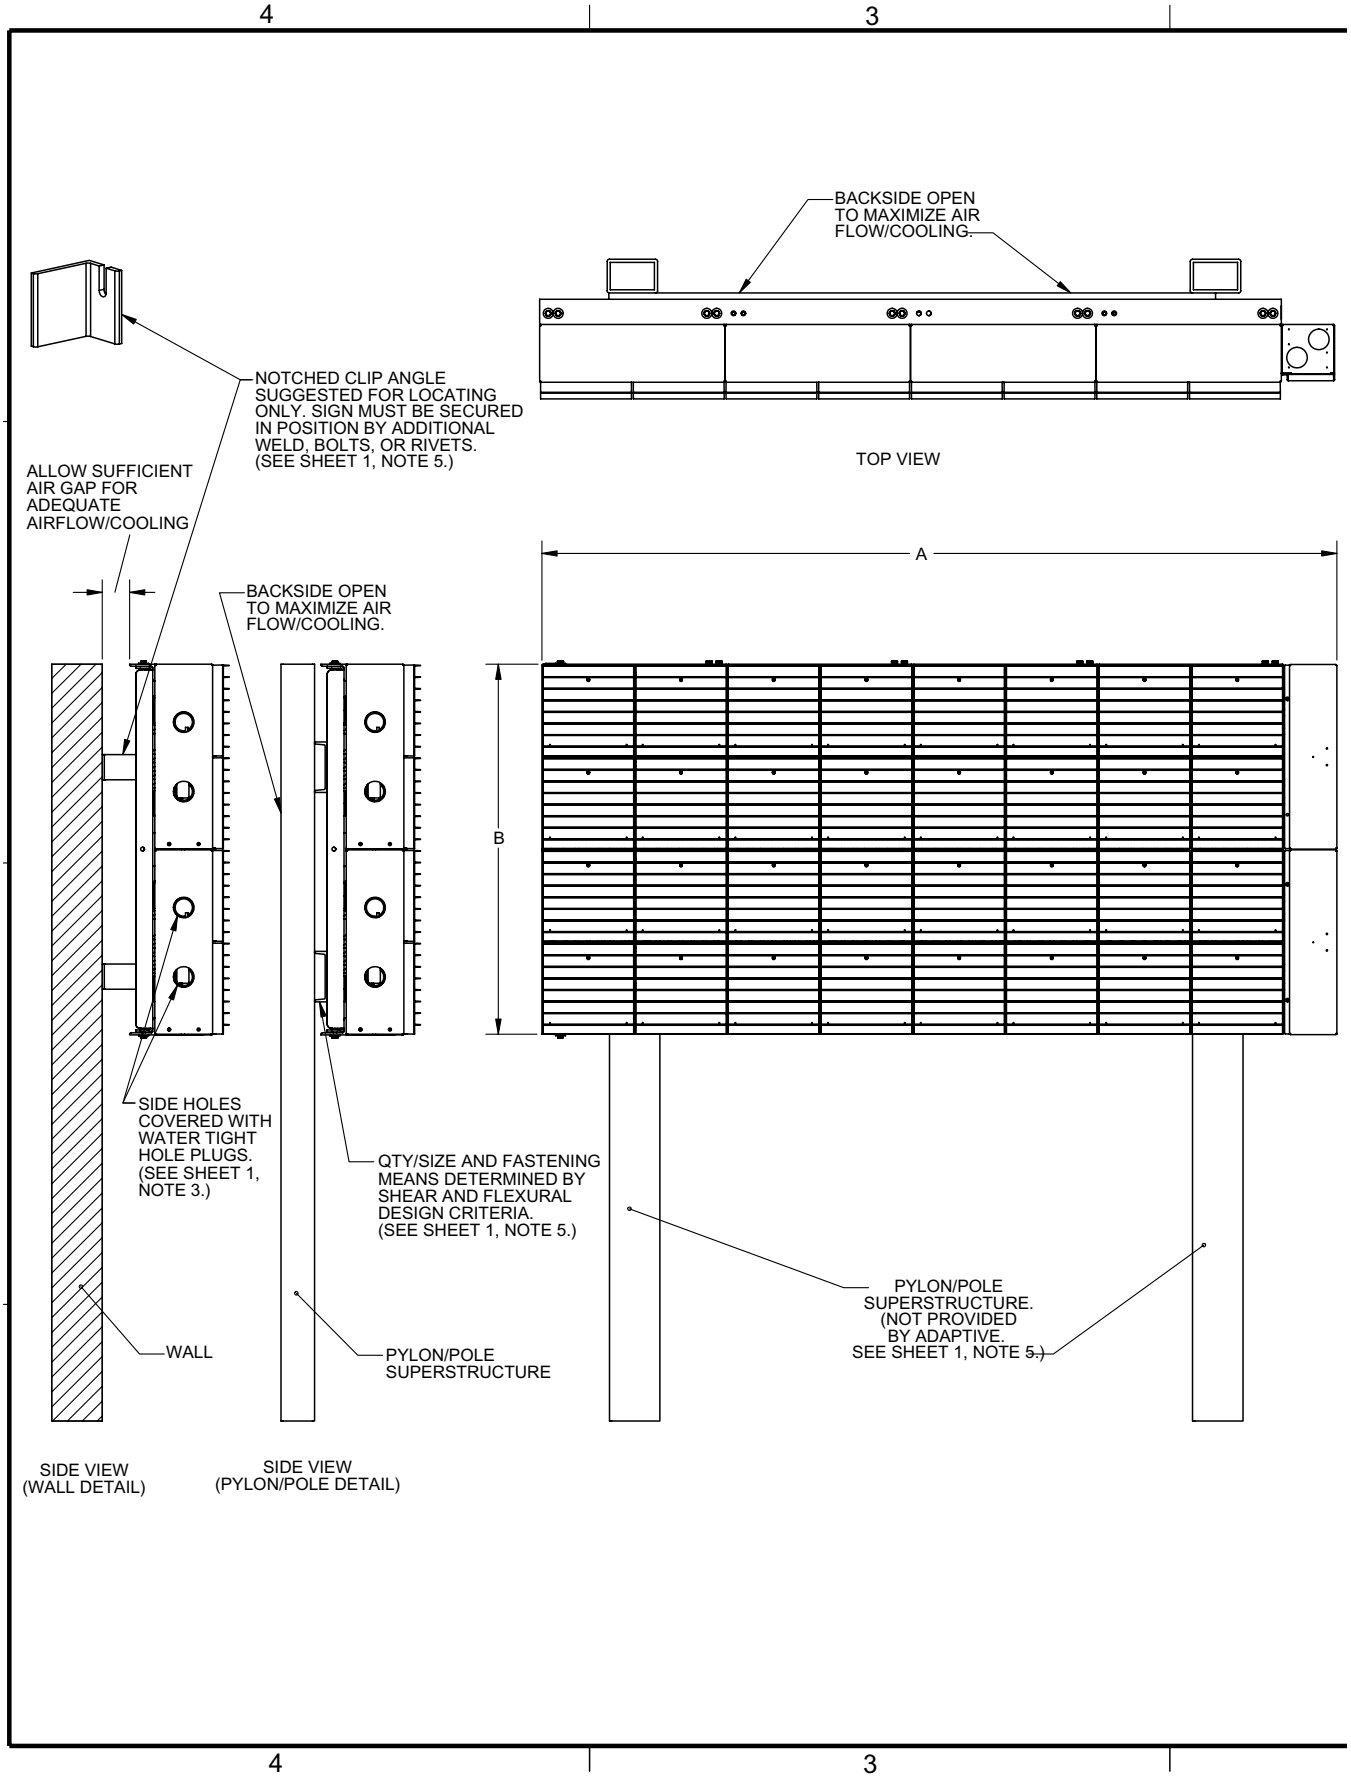

Model Number Explanation:

3600 - 64 x 16 R/A/RGB



Notes:
1) Table represents standard single sign sections only. Dimensions include either Left or Right mounted wireway. Location to be specified at time of order. See note 2 for signs exceeding table values.
2) Contact Adaptive for information about multiple sign sections which are available up to 256x128.
3) All dimensions ±.50" [1]
4) Weight ±10%

SIGN SECTION MODEL NUMBER	SIGN WEIGHT (lbs)	[1] DIM "A"	[1] DIM "B"
AlphaEclipse 3600 -32x16 R/A/RGB	100	50.43	22.05
AlphaEclipse 3600 -48x16 R/A/RGB	150	72.48	22.05
AlphaEclipse 3600 -64x16 R/A/RGB	200	94.53	22.05
AlphaEclipse 3600 -80x16 R/A/RGB	250	116.58	22.05
AlphaEclipse 3600 -96x16 R/A/RGB	300	138.62	22.05
AlphaEclipse 3600 -112x16 R/A/RGB	350	160.67	22.05
AlphaEclipse 3600 -128x16 R/A/RGB	400	182.72	22.05
AlphaEclipse 3600 -144x16 R/A/RGB	450	204.76	22.05
AlphaEclipse 3600 -160x16 R/A/RGB	500	226.81	22.05
AlphaEclipse 3600 -176x16 R/A/RGB	550	248.86	22.05
AlphaEclipse 3600 -32x32 R/A/RGB	200	50.43	44.09
AlphaEclipse 3600 -48x32 R/A/RGB	300	72.48	44.09
AlphaEclipse 3600 -64x32 R/A/RGB	400	94.53	44.09
AlphaEclipse 3600 -80x32 R/A/RGB	500	116.58	44.09
AlphaEclipse 3600 -96x32 R/A/RGB	600	138.62	44.09
AlphaEclipse 3600 -112x32 R/A/RGB	700	160.67	44.09
AlphaEclipse 3600 -128x32 R/A/RGB	800	182.72	44.09
AlphaEclipse 3600 -144x32 R/A/RGB	900	204.76	44.09
AlphaEclipse 3600 -160x32 R/A/RGB	1000	226.81	44.09
AlphaEclipse 3600 -176x32 R/A/RGB	1100	248.86	44.09
AlphaEclipse 3600 -32x48 R/A/RGB	300	50.43	66.14
AlphaEclipse 3600 -48x48 R/A/RGB	450	72.48	66.14
AlphaEclipse 3600 -64x48 R/A/RGB	600	94.53	66.14
AlphaEclipse 3600 -80x48 R/A/RGB	750	116.58	66.14
AlphaEclipse 3600 -96x48 R/A/RGB	900	138.62	66.14
AlphaEclipse 3600 -112x48 R/A/RGB	1050	160.67	66.14
AlphaEclipse 3600 -128x48 R/A/RGB	1200	182.72	66.14
AlphaEclipse 3600 -144x48 R/A/RGB	1350	204.76	66.14
AlphaEclipse 3600 -160x48 R/A/RGB	1500	226.81	66.14
AlphaEclipse 3600 -176x48 R/A/RGB	1650	248.86	66.14
AlphaEclipse 3600 -32x64 R/A/RGB	400	50.43	88.19
AlphaEclipse 3600 -48x64 R/A/RGB	600	72.48	88.19
AlphaEclipse 3600 -64x64 R/A/RGB	800	94.53	88.19
AlphaEclipse 3600 -80x64 R/A/RGB	1000	116.58	88.19
AlphaEclipse 3600 -96x64 R/A/RGB	1200	138.62	88.19
AlphaEclipse 3600 -112x64 R/A/RGB	1400	160.67	88.19
AlphaEclipse 3600 -128x64 R/A/RGB	1600	182.72	88.19
AlphaEclipse 3600 -144x64 R/A/RGB	1800	204.76	88.19
AlphaEclipse 3600 -160x64 R/A/RGB	2000	226.81	88.19
AlphaEclipse 3600 -176x64 R/A/RGB	2200	248.86	88.19
AlphaEclipse 3600 -32x80 R/A/RGB	500	50.43	110.24
AlphaEclipse 3600 -48x80 R/A/RGB	750	72.48	110.24
AlphaEclipse 3600 -64x80 R/A/RGB	1000	94.53	110.24
AlphaEclipse 3600 -80x80 R/A/RGB	1250	116.58	110.24
AlphaEclipse 3600 -96x80 R/A/RGB	1500	138.62	110.24
AlphaEclipse 3600 -112x80 R/A/RGB	1750	160.67	110.24
AlphaEclipse 3600 -128x80 R/A/RGB	2000	182.72	110.24
AlphaEclipse 3600 -144x80 R/A/RGB	2250	204.76	110.24
AlphaEclipse 3600 -160x80 R/A/RGB	2500	226.81	110.24
AlphaEclipse 3600 -176x80 R/A/RGB	2750	248.86	110.24

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED

.X	±0.1
.XX	±0.02
.XXX	±0.005
ANGLES	±1°

DESIGNED BY: SSL — DATE: 9/14/03
DRAWN BY: SSL — DATE: 9/14/03
APPROVED BY: — DATE:

ADAPTIVE Adaptive Micro Systems LLC 7840 North 86th Street Milwaukee, WI 53224 USA

TITLE: ALPHA ECLIPSE 3600 MECHANICAL DETAILS

SIZE: C | DOCUMENT NO.: 11800000-07 | REVISION: F

SCALE: 1:12 | STATUS: Released | SHT: 2 of 5

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

Mechanical installation (11800000-07 revision F, sheet 3 of 5)

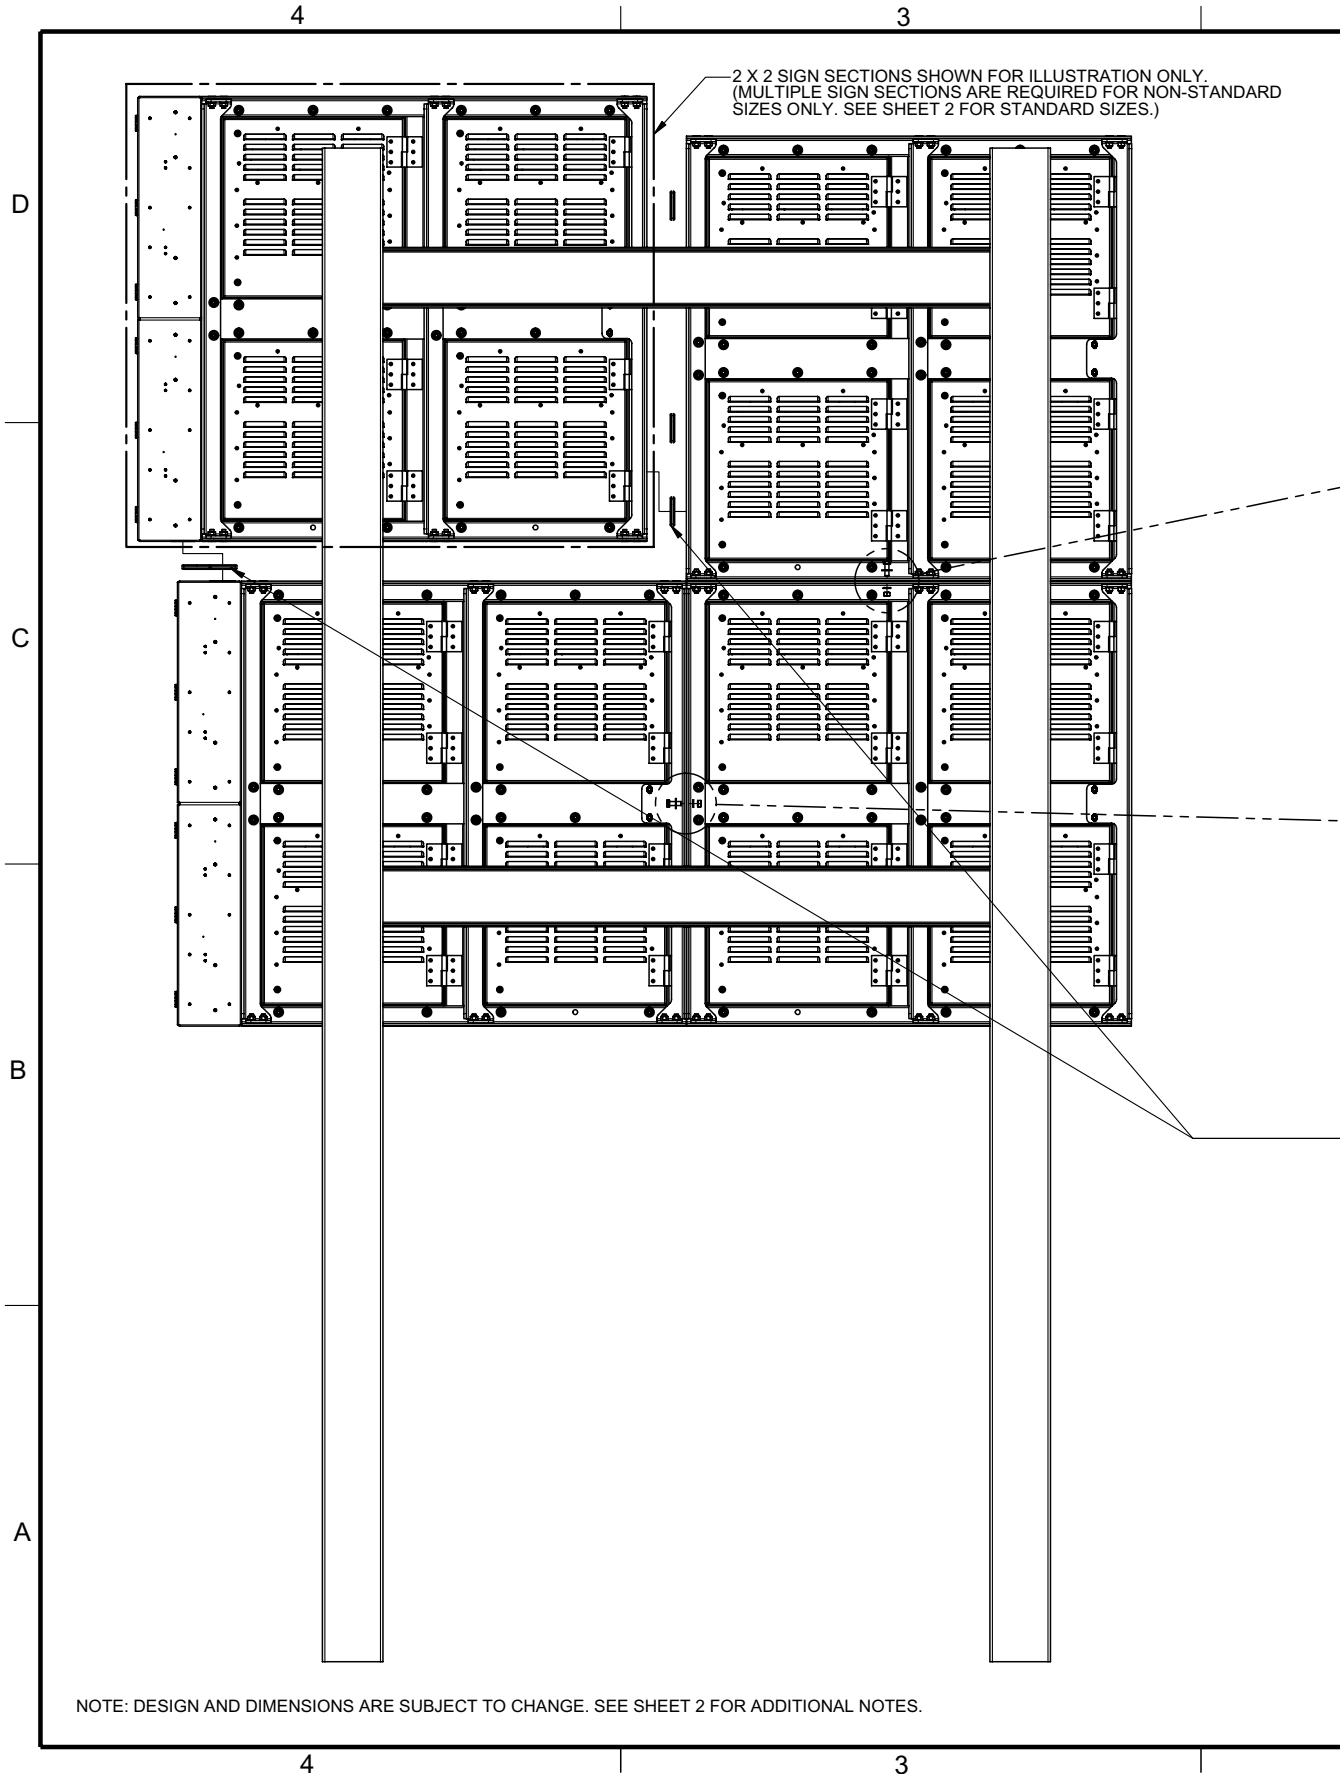

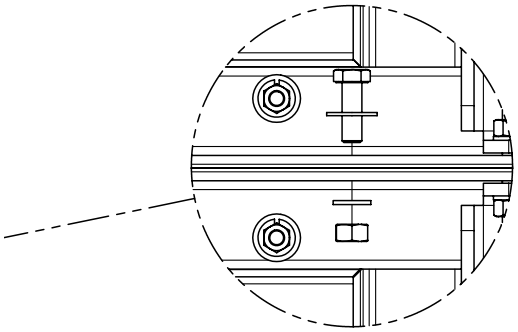

BOLT TOGETHER FOR ALIGNMENT USING HOLES PROVIDED.
BOLTS MUST BE USED FOR ALIGNMENT ONLY
AND NOT AS A STRUCTURAL JOINT. (SEE SHEET 1, NOTE 5.)

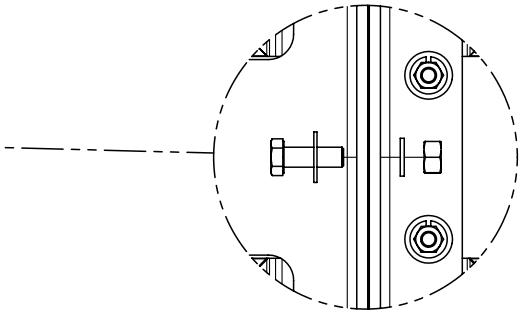

IINSTALL GROMMETS (PROVIDED) BETWEEN SIGN SECTIONS. ALL DATA AND POWER CABLES MUST BE ROUTED THROUGH THE GROMMETS. POWER AND DATA CABLES MUST BE ROUTED THROUGH SEPARATE HOLES. POWER AND FIBER OPTIC CAN BE ROUTED THROUGH THE SAME HOLE IF NECESSARY.

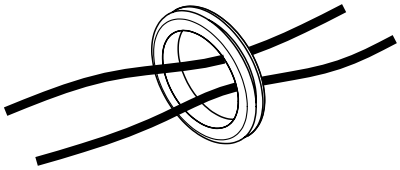

GROMMET DETAIL
SCALE 1:2

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED	
.X	±0.1
.XX	±0.02
.XXX	±0.005
ANGLES	±1°
DESIGNED BY: SSL	DATE: 9/14/03
DRAWN BY: SSL	DATE: 9/14/03
APPROVED BY	DATE

ADAPTIVE
Adaptive Micro Systems LLC 7840 North 86th Street Milwaukee, WI 53224 USA

TITLE: ALPHA ECLIPSE 3600 MECHANICAL DETAILS

SIZE	DOCUMENT NO.	REVISION
C	11800000-07	F

SCALE:	STATUS:	SHT
1:10	Released	3 of 5

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

120V electrical installation (11800000-07 revision F, sheet 4 of 5)

MODEL#	120~VAC										
	CIRCUIT 1	CIRCUIT 2	CIRCUIT 3	CIRCUIT 4	CIRCUIT 5	CIRCUIT 6	CIRCUIT 7	CIRCUIT 8	CIRCUIT 9	CIRCUIT 10	TOTAL
16 Pixels High - RGB											
1180 36 01 016 016 RGB	2.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	2.8
1180 36 01 032 016 RGB	5.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	5.5
1180 36 01 048 016 RGB	8.3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	8.3
1180 36 01 064 016 RGB	11.1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	11.1
1180 36 01 080 016 RGB	13.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	13.9
1180 36 01 096 016 RGB	16.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	16.6
1180 36 01 112 016 RGB	19.4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	19.4
1180 36 01 128 016 RGB	22.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	22.2
1180 36 01 144 016 RGB	22.2	2.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	24.9
1180 36 01 160 016 RGB	22.2	5.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	27.7
1180 36 01 176 016 RGB	22.2	8.3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	30.5
32 Pixels High - RGB											
1180 36 01 016 032 RGB	5.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	5.5
1180 36 01 032 032 RGB	11.1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	11.1
1180 36 01 048 032 RGB	16.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	16.6
1180 36 01 064 032 RGB	22.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	22.2
1180 36 01 080 032 RGB	13.9	13.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	27.7
1180 36 01 096 032 RGB	16.6	16.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	33.2
1180 36 01 112 032 RGB	19.4	19.4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	38.8
1180 36 01 128 032 RGB	22.2	22.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	44.3
1180 36 01 144 032 RGB	13.9	22.2	13.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	49.9
1180 36 01 160 032 RGB	16.6	22.2	16.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	55.4
1180 36 01 176 032 RGB	19.4	22.2	19.4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	60.9
48 Pixels High - RGB											
1180 36 01 016 048 RGB	8.3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	8.3
1180 36 01 032 048 RGB	16.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	16.6
1180 36 01 048 048 RGB	11.1	13.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	24.9
1180 36 01 064 048 RGB	16.6	16.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	33.2
1180 36 01 080 048 RGB	22.2	19.4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	41.6
1180 36 01 096 048 RGB	16.6	16.6	16.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	49.9
1180 36 01 112 048 RGB	19.4	19.4	19.4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	58.2
1180 36 01 128 048 RGB	22.2	22.2	22.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	66.5
1180 36 01 144 048 RGB	19.4	16.6	19.4	19.4	N/A	N/A	N/A	N/A	N/A	N/A	74.8
1180 36 01 160 048 RGB	22.2	16.6	22.2	22.2	N/A	N/A	N/A	N/A	N/A	N/A	83.1
1180 36 01 176 048 RGB	19.4	22.2	19.4	19.4	11.1	N/A	N/A	N/A	N/A	N/A	91.4
64 Pixels High - RGB											
1180 36 01 016 064 RGB	11.1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	11.1
1180 36 01 032 064 RGB	22.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	22.2
1180 36 01 048 064 RGB	16.6	16.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	33.2
1180 36 01 064 064 RGB	22.2	22.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	44.3
1180 36 01 080 064 RGB	16.6	22.2	16.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	55.4
1180 36 01 096 064 RGB	22.2	22.2	22.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	66.5
1180 36 01 112 064 RGB	19.4	19.4	19.4	19.4	N/A	N/A	N/A	N/A	N/A	N/A	77.6
1180 36 01 128 064 RGB	22.2	22.2	22.2	22.2	N/A	N/A	N/A	N/A	N/A	N/A	88.6
1180 36 01 144 064 RGB	19.4	22.2	19.4	19.4	19.4	N/A	N/A	N/A	N/A	N/A	99.7
1180 36 01 160 064 RGB	22.2	22.2	22.2	22.2	22.2	N/A	N/A	N/A	N/A	N/A	110.8
1180 36 01 176 064 RGB	19.4	22.2	19.4	22.2	19.4	19.4	N/A	N/A	N/A	N/A	121.9
80 Pixels High - RGB											
1180 36 01 016 080 RGB	13.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	13.9
1180 36 01 032 080 RGB	13.9	13.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	27.7
1180 36 01 048 080 RGB	22.2	19.4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	41.6
1180 36 01 064 080 RGB	22.2	22.2	11.1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	55.4
1180 36 01 080 080 RGB	13.9	13.9	13.9	13.9	13.9	N/A	N/A	N/A	N/A	N/A	69.3
1180 36 01 096 080 RGB	16.6	16.6	16.6	16.6	16.6	N/A	N/A	N/A	N/A	N/A	83.1
1180 36 01 112 080 RGB	19.4	19.4	19.4	19.4	19.4	N/A	N/A	N/A	N/A	N/A	97.0
1180 36 01 128 080 RGB	22.2	22.2	22.2	22.2	22.2	N/A	N/A	N/A	N/A	N/A	110.8
1180 36 01 144 080 RGB	19.4	11.1	19.4	19.4	16.6	19.4	19.4	N/A	N/A	N/A	124.7
1180 36 01 160 080 RGB	22.2	11.1	22.2	22.2	16.6	22.2	22.2	N/A	N/A	N/A	138.5
1180 36 01 176 080 RGB	8.3	22.2	8.3	22.2	8.3	22.2	8.3	22.2	8.3	22.2	152.4

The values shown in these tables are the Rated Maximum current. This is a sign's maximum power usage which is calculated with every LED lit and all fans on.

Maximum Operation current is 65% of the Rated Maximum current.

Typical Operation current is 25% of the Rated Maximum current.

MODEL#	120~VAC										
	CIRCUIT 1	CIRCUIT 2	CIRCUIT 3	CIRCUIT 4	CIRCUIT 5	CIRCUIT 6	CIRCUIT 7	CIRCUIT 8	CIRCUIT 9	CIRCUIT 10	TOTAL
16 Pixels High - Red/Amber											
1180 36 01 016 016 RED/AMB	1.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	1.8
1180 36 01 032 016 RED/AMB	3.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	3.5
1180 36 01 048 016 RED/AMB	5.3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	5.3
1180 36 01 064 016 RED/AMB	7.1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	7.1
1180 36 01 080 016 RED/AMB	8.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	8.9
1180 36 01 096 016 RED/AMB	10.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	10.6
1180 36 01 112 016 RED/AMB	12.4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	12.4
1180 36 01 128 016 RED/AMB	14.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	14.2
1180 36 01 144 016 RED/AMB	15.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	15.9
1180 36 01 160 016 RED/AMB	17.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	17.7
1180 36 01 176 016 RED/AMB	19.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	19.5
32 Pixels High - Red/Amber											
1180 36 01 016 032 RED/AMB	3.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	3.5
1180 36 01 032 032 RED/AMB	7.1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	7.1
1180 36 01 048 032 RED/AMB	10.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	10.6
1180 36 01 064 032 RED/AMB	14.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	14.2
1180 36 01 080 032 RED/AMB	17.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	17.7
1180 36 01 096 032 RED/AMB	21.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	21.2
1180 36 01 112 032 RED/AMB	12.4	12.4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	24.8
1180 36 01 128 032 RED/AMB	14.2	14.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	28.3
1180 36 01 144 032 RED/AMB	15.9	15.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	31.9
1180 36 01 160 032 RED/AMB	17.7	17.1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	35.4
1180 36 01 176 032 RED/AMB	19.5	19.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	38.9
48 Pixels High - Red/Amber											
1180 36 01 016 048 RED/AMB	5.3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	5.3
1180 36 01 032 048 RED/AMB	10.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	10.6
1180 36 01 048 048 RED/AMB	15.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	15.9
1180 36 01 064 048 RED/AMB	21.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	21.2
1180 36 01 080 048 RED/AMB	12.4	14.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	26.6
1180 36 01 096 048 RED/AMB	15.9	15.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	31.9
1180 36 01 112 048 RED/AMB	19.5	17.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	37.2
1180 36 01 128 048 RED/AMB	23.0	19.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	42.5
1180 36 01 144 048 RED/AMB	15.9	15.9	15.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	47.8
1180 36 01 160 048 RED/AMB	17.7	17.7	17.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	53.1
1180 36 01 176 048 RED/AMB	19.5	19.5	19.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	58.4
64 Pixels High - Red/Amber											
1180 36 01 016 064 RED/AMB	7.1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	7.1
1180 36 01 032 064 RED/AMB	14.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	14.2
1180 36 01 048 064 RED/AMB	21.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	21.2
1180 36 01 064 064 RED/AMB	14.2	14.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	28.3
1180 36 01 080 064 RED/AMB	17.7	17.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	35.4
1180 36 01 096 064 RED/AMB	21.2	21.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	42.5
1180 36 01 112 064 RED/AMB	14.2	21.2	14.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	49.6
1180 36 01 128 064 RED/AMB	17.7	21.2	17.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	56.6
1180 36 01 144 064 RED/AMB	21.2	21.2	21.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	63.7
1180 36 01 160 064 RED/AMB	17.7	17.7	17.7	17.7	N/A	N/A	N/A	N/A	N/A	N/A	70.8
1180 36 01 176 064 RED/AMB	19.5	19.5	19.5	19.5	N/A	N/A	N/A	N/A	N/A	N/A	77.9
80 Pixels High - Red/Amber											
1180 36 01 016 080 RED/AMB	8.9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	8.9
1180 36 01 032 080 RED/AMB	17.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	17.7
1180 36 01 048 080 RED/AMB	12.4	14.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	26.6
1180 36 01 064 080 RED/AMB	17.7	17.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	35.4
1180 36 01 080 080 RED/AMB	23.0	21.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	44.3
1180 36 01 096 080 RED/AMB	17.7	21.2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	53.1
1180 36 01 112 080 RED/AMB	20.1	21.2	17.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	62.0
1180 36 01 128 080 RED/AMB	14.2	14.2	14.2	14.2	14.2	N/A	N/A	N/A	N/A	N/A	70.8
1180 36 01 144 080 RED/AMB	15.9	15.9	15.9	15.9	15.9	N/A	N/A	N/A	N/A	N/A	79.7
1180 36 01 160 080 RED/AMB	17.7	17.7	17.7	17.7	17.7	N/A	N/A	N/A	N/A	N/A	88.5
1180 36 01 176 080 RED/AMB	19.5	19.5	19.5	19.5	19.5	N/A	N/A	N/A	N/A	N/A	97.4

NOTE: MONOCHROME MODEL NUMBERS WILL CONTAIN EITHER RED OR AMB (NOT BOTH)

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED

.X	±0.1
.XX	±0.02
.XXX	±0.005
ANGLES	±1°

DESIGNED BY	SSL	DATE	9/14/03
DRAWN BY	SSL	DATE	9/14/03
APPROVED BY		DATE	

ADAPTIVE Adaptive Micro Systems LLC 7840 North 86th Street Milwaukee, WI 53224 USA

TITLE: ALPHA ECLIPSE 3600 MECHANICAL DETAILS

SIZE	DOCUMENT NO.	REVISION
C	11800000-07	F

SCALE:	STATUS:	SHT
1:12	Released	4 of 5

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

230V electrical installation (11800000-07 revision F, sheet 5 of 5)

MODEL #	230~VAC					
	CIRCUIT 1	CIRCUIT 2	CIRCUIT 3	CIRCUIT 4	CIRCUIT 5	TOTAL
16 Pixels High - RGB						
1180 36 01 016 016 RGB	1.4	N/A	N/A	N/A	N/A	1.4
1180 36 01 032 016 RGB	2.8	N/A	N/A	N/A	N/A	2.8
1180 36 01 048 016 RGB	4.2	N/A	N/A	N/A	N/A	4.2
1180 36 01 064 016 RGB	5.5	N/A	N/A	N/A	N/A	5.5
1180 36 01 080 016 RGB	6.9	N/A	N/A	N/A	N/A	6.9
1180 36 01 096 016 RGB	8.3	N/A	N/A	N/A	N/A	8.3
1180 36 01 112 016 RGB	9.7	N/A	N/A	N/A	N/A	9.7
1180 36 01 128 016 RGB	11.1	N/A	N/A	N/A	N/A	11.1
1180 36 01 144 016 RGB	12.5	N/A	N/A	N/A	N/A	12.5
1180 36 01 160 016 RGB	13.9	N/A	N/A	N/A	N/A	13.9
1180 36 01 176 016 RGB	15.2	N/A	N/A	N/A	N/A	15.2
32 Pixels High - RGB						
1180 36 01 016 032 RGB	2.8	N/A	N/A	N/A	N/A	2.8
1180 36 01 032 032 RGB	5.5	N/A	N/A	N/A	N/A	5.5
1180 36 01 048 032 RGB	8.3	N/A	N/A	N/A	N/A	8.3
1180 36 01 064 032 RGB	11.1	N/A	N/A	N/A	N/A	11.1
1180 36 01 080 032 RGB	13.3	N/A	N/A	N/A	N/A	13.9
1180 36 01 096 032 RGB	16.6	N/A	N/A	N/A	N/A	16.6
1180 36 01 112 032 RGB	19.4	N/A	N/A	N/A	N/A	19.4
1180 36 01 128 032 RGB	22.2	N/A	N/A	N/A	N/A	22.2
1180 36 01 144 032 RGB	12.5	12.5	N/A	N/A	N/A	24.9
1180 36 01 160 032 RGB	13.9	13.9	N/A	N/A	N/A	27.7
1180 36 01 176 032 RGB	15.2	15.2	N/A	N/A	N/A	30.5
48 Pixels High - RGB						
1180 36 01 016 048 RGB	4.2	N/A	N/A	N/A	N/A	4.2
1180 36 01 032 048 RGB	8.3	N/A	N/A	N/A	N/A	8.3
1180 36 01 048 048 RGB	12.5	N/A	N/A	N/A	N/A	12.5
1180 36 01 064 048 RGB	16.6	N/A	N/A	N/A	N/A	16.6
1180 36 01 080 048 RGB	20.8	N/A	N/A	N/A	N/A	20.8
1180 36 01 096 048 RGB	9.7	15.2	N/A	N/A	N/A	24.9
1180 36 01 112 048 RGB	12.5	16.6	N/A	N/A	N/A	29.1
1180 36 01 128 048 RGB	15.2	18.0	N/A	N/A	N/A	33.2
1180 36 01 144 048 RGB	18.0	19.4	N/A	N/A	N/A	37.4
1180 36 01 160 048 RGB	20.8	20.8	N/A	N/A	N/A	41.6
1180 36 01 176 048 RGB	15.2	15.2	15.2	N/A	N/A	45.7
64 Pixels High - RGB						
1180 36 01 016 064 RGB	5.5	N/A	N/A	N/A	N/A	5.5
1180 36 01 032 064 RGB	11.1	N/A	N/A	N/A	N/A	11.1
1180 36 01 048 064 RGB	16.6	N/A	N/A	N/A	N/A	16.6
1180 36 01 064 064 RGB	22.2	N/A	N/A	N/A	N/A	22.2
1180 36 01 080 064 RGB	13.9	13.9	N/A	N/A	N/A	27.7
1180 36 01 096 064 RGB	16.6	16.6	N/A	N/A	N/A	33.2
1180 36 01 112 064 RGB	19.4	19.4	N/A	N/A	N/A	38.8
1180 36 01 128 064 RGB	22.2	22.2	N/A	N/A	N/A	44.3
1180 36 01 144 064 RGB	13.9	22.2	13.9	N/A	N/A	49.9
1180 36 01 160 064 RGB	16.6	22.2	16.6	N/A	N/A	55.4
1180 36 01 176 064 RGB	19.4	22.2	19.4	N/A	N/A	60.9
80 Pixels High - RGB						
1180 36 01 016 080 RGB	6.9	N/A	N/A	N/A	N/A	6.9
1180 36 01 032 080 RGB	13.9	N/A	N/A	N/A	N/A	13.9
1180 36 01 048 080 RGB	20.8	N/A	N/A	N/A	N/A	20.8
1180 36 01 064 080 RGB	12.5	15.2	N/A	N/A	N/A	27.7
1180 36 01 080 080 RGB	16.6	18.0	N/A	N/A	N/A	34.6
1180 36 01 096 080 RGB	20.8	20.8	N/A	N/A	N/A	41.6
1180 36 01 112 080 RGB	19.4	19.4	9.7	N/A	N/A	48.5
1180 36 01 128 080 RGB	22.2	22.2	11.1	N/A	N/A	55.4
1180 36 01 144 080 RGB	16.6	20.8	16.6	8.3	N/A	62.3
1180 36 01 160 080 RGB	19.4	20.8	19.4	9.7	N/A	69.3
1180 36 01 176 080 RGB	22.2	20.8	22.2	11.1	N/A	76.2

The values shown in these tables are the Rated Maximum current. This is a sign's maximum power usage which is calculated with every LED lit and all fans on.

Maximum Operation current is 65% of the Rated Maximum current.

Typical Operation current is 25% of the Rated Maximum current.

MODEL #	230~VAC					
	CIRCUIT 1	CIRCUIT 2	CIRCUIT 3	CIRCUIT 4	CIRCUIT 5	TOTAL
16 Pixels High - Red/Amber						
1180 36 01 016 016 RED/AMB	0.9	N/A	N/A	N/A	N/A	0.9
1180 36 01 032 016 RED/AMB	1.8	N/A	N/A	N/A	N/A	1.8
1180 36 01 048 016 RED/AMB	2.7	N/A	N/A	N/A	N/A	2.7
1180 36 01 064 016 RED/AMB	3.5	N/A	N/A	N/A	N/A	3.5
1180 36 01 080 016 RED/AMB	4.4	N/A	N/A	N/A	N/A	4.4
1180 36 01 096 016 RED/AMB	5.3	N/A	N/A	N/A	N/A	5.3
1180 36 01 112 016 RED/AMB	6.2	N/A	N/A	N/A	N/A	6.2
1180 36 01 128 016 RED/AMB	7.1	N/A	N/A	N/A	N/A	7.1
1180 36 01 144 016 RED/AMB	8.0	N/A	N/A	N/A	N/A	8.0
1180 36 01 160 016 RED/AMB	8.9	N/A	N/A	N/A	N/A	8.9
1180 36 01 176 016 RED/AMB	9.7	N/A	N/A	N/A	N/A	9.7
32 Pixels High - Red/Amber						
1180 36 01 016 032 RED/AMB	1.8	N/A	N/A	N/A	N/A	1.8
1180 36 01 032 032 RED/AMB	3.5	N/A	N/A	N/A	N/A	3.5
1180 36 01 048 032 RED/AMB	5.3	N/A	N/A	N/A	N/A	5.3
1180 36 01 064 032 RED/AMB	7.1	N/A	N/A	N/A	N/A	7.1
1180 36 01 080 032 RED/AMB	8.9	N/A	N/A	N/A	N/A	8.9
1180 36 01 096 032 RED/AMB	10.6	N/A	N/A	N/A	N/A	10.6
1180 36 01 112 032 RED/AMB	12.4	N/A	N/A	N/A	N/A	12.4
1180 36 01 128 032 RED/AMB	14.2	N/A	N/A	N/A	N/A	14.2
1180 36 01 144 032 RED/AMB	15.9	N/A	N/A	N/A	N/A	15.9
1180 36 01 160 032 RED/AMB	17.7	N/A	N/A	N/A	N/A	17.7
1180 36 01 176 032 RED/AMB	19.5	N/A	N/A	N/A	N/A	19.5
48 Pixels High - Red/Amber						
1180 36 01 016 048 RED/AMB	2.7	N/A	N/A	N/A	N/A	2.7
1180 36 01 032 048 RED/AMB	5.3	N/A	N/A	N/A	N/A	5.3
1180 36 01 048 048 RED/AMB	8.0	N/A	N/A	N/A	N/A	8.0
1180 36 01 064 048 RED/AMB	10.6	N/A	N/A	N/A	N/A	10.6
1180 36 01 080 048 RED/AMB	13.3	N/A	N/A	N/A	N/A	13.3
1180 36 01 096 048 RED/AMB	15.9	N/A	N/A	N/A	N/A	15.9
1180 36 01 112 048 RED/AMB	18.6	N/A	N/A	N/A	N/A	18.6
1180 36 01 128 048 RED/AMB	21.2	N/A	N/A	N/A	N/A	21.2
1180 36 01 144 048 RED/AMB	23.9	N/A	N/A	N/A	N/A	23.9
1180 36 01 160 048 RED/AMB	13.3	13.3	N/A	N/A	N/A	26.6
1180 36 01 176 048 RED/AMB	15.0	14.2	N/A	N/A	N/A	29.2
64 Pixels High - Red/Amber						
1180 36 01 016 064 RED/AMB	3.5	N/A	N/A	N/A	N/A	3.5
1180 36 01 032 064 RED/AMB	7.1	N/A	N/A	N/A	N/A	7.1
1180 36 01 048 064 RED/AMB	10.6	N/A	N/A	N/A	N/A	10.6
1180 36 01 064 064 RED/AMB	14.2	N/A	N/A	N/A	N/A	14.2
1180 36 01 080 064 RED/AMB	17.7	N/A	N/A	N/A	N/A	17.7
1180 36 01 096 064 RED/AMB	21.2	N/A	N/A	N/A	N/A	21.2
1180 36 01 112 064 RED/AMB	12.4	12.4	N/A	N/A	N/A	24.8
1180 36 01 128 064 RED/AMB	14.2	14.2	N/A	N/A	N/A	28.3
1180 36 01 144 064 RED/AMB	15.9	15.9	N/A	N/A	N/A	31.9
1180 36 01 160 064 RED/AMB	17.7	17.7	N/A	N/A	N/A	35.4
1180 36 01 176 064 RED/AMB	19.5	19.5	N/A	N/A	N/A	38.9
80 Pixels High - Red/Amber						
1180 36 01 016 080 RED/AMB	4.4	N/A	N/A	N/A	N/A	4.4
1180 36 01 032 080 RED/AMB	8.9	N/A	N/A	N/A	N/A	8.9
1180 36 01 048 080 RED/AMB	13.3	N/A	N/A	N/A	N/A	13.3
1180 36 01 064 080 RED/AMB	17.7	N/A	N/A	N/A	N/A	17.7
1180 36 01 080 080 RED/AMB	22.1	N/A	N/A	N/A	N/A	22.1
1180 36 01 096 080 RED/AMB	11.5	15.0	N/A	N/A	N/A	26.6
1180 36 01 112 080 RED/AMB	14.2	16.3	N/A	N/A	N/A	31.0
1180 36 01 128 080 RED/AMB	16.8	18.6	N/A	N/A	N/A	35.4
1180 36 01 144 080 RED/AMB	19.5	20.4	N/A	N/A	N/A	39.8
1180 36 01 160 080 RED/AMB	22.1	22.1	N/A	N/A	N/A	44.3
1180 36 01 176 080 RED/AMB	19.5	19.5	9.7	N/A	N/A	48.7

NOTE: MONOCHROME MODEL NUMBERS WILL CONTAIN EITHER RED OR AMB (NOT BOTH)

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED

.X	±0.1
.XX	±0.02
.XXX	±0.005
ANGLES	±1°

DESIGNED BY	SSL	DATE	9/14/03
DRAWN BY	SSL	DATE	9/14/03
APPROVED BY		DATE	

ADAPTIVE
Adaptive Micro Systems LLC 7840 North 86th Street Milwaukee, WI 53224 USA

TITLE: ALPHA ECLIPSE 3600 MECHANICAL DETAILS

SIZE	DOCUMENT NO.	REVISION
C	11800000-07	F

SCALE:	STATUS:	SHT
1:12	Released	5 of 5

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

Multi-section sign: vertical split assembly (11800000-15, revision A)

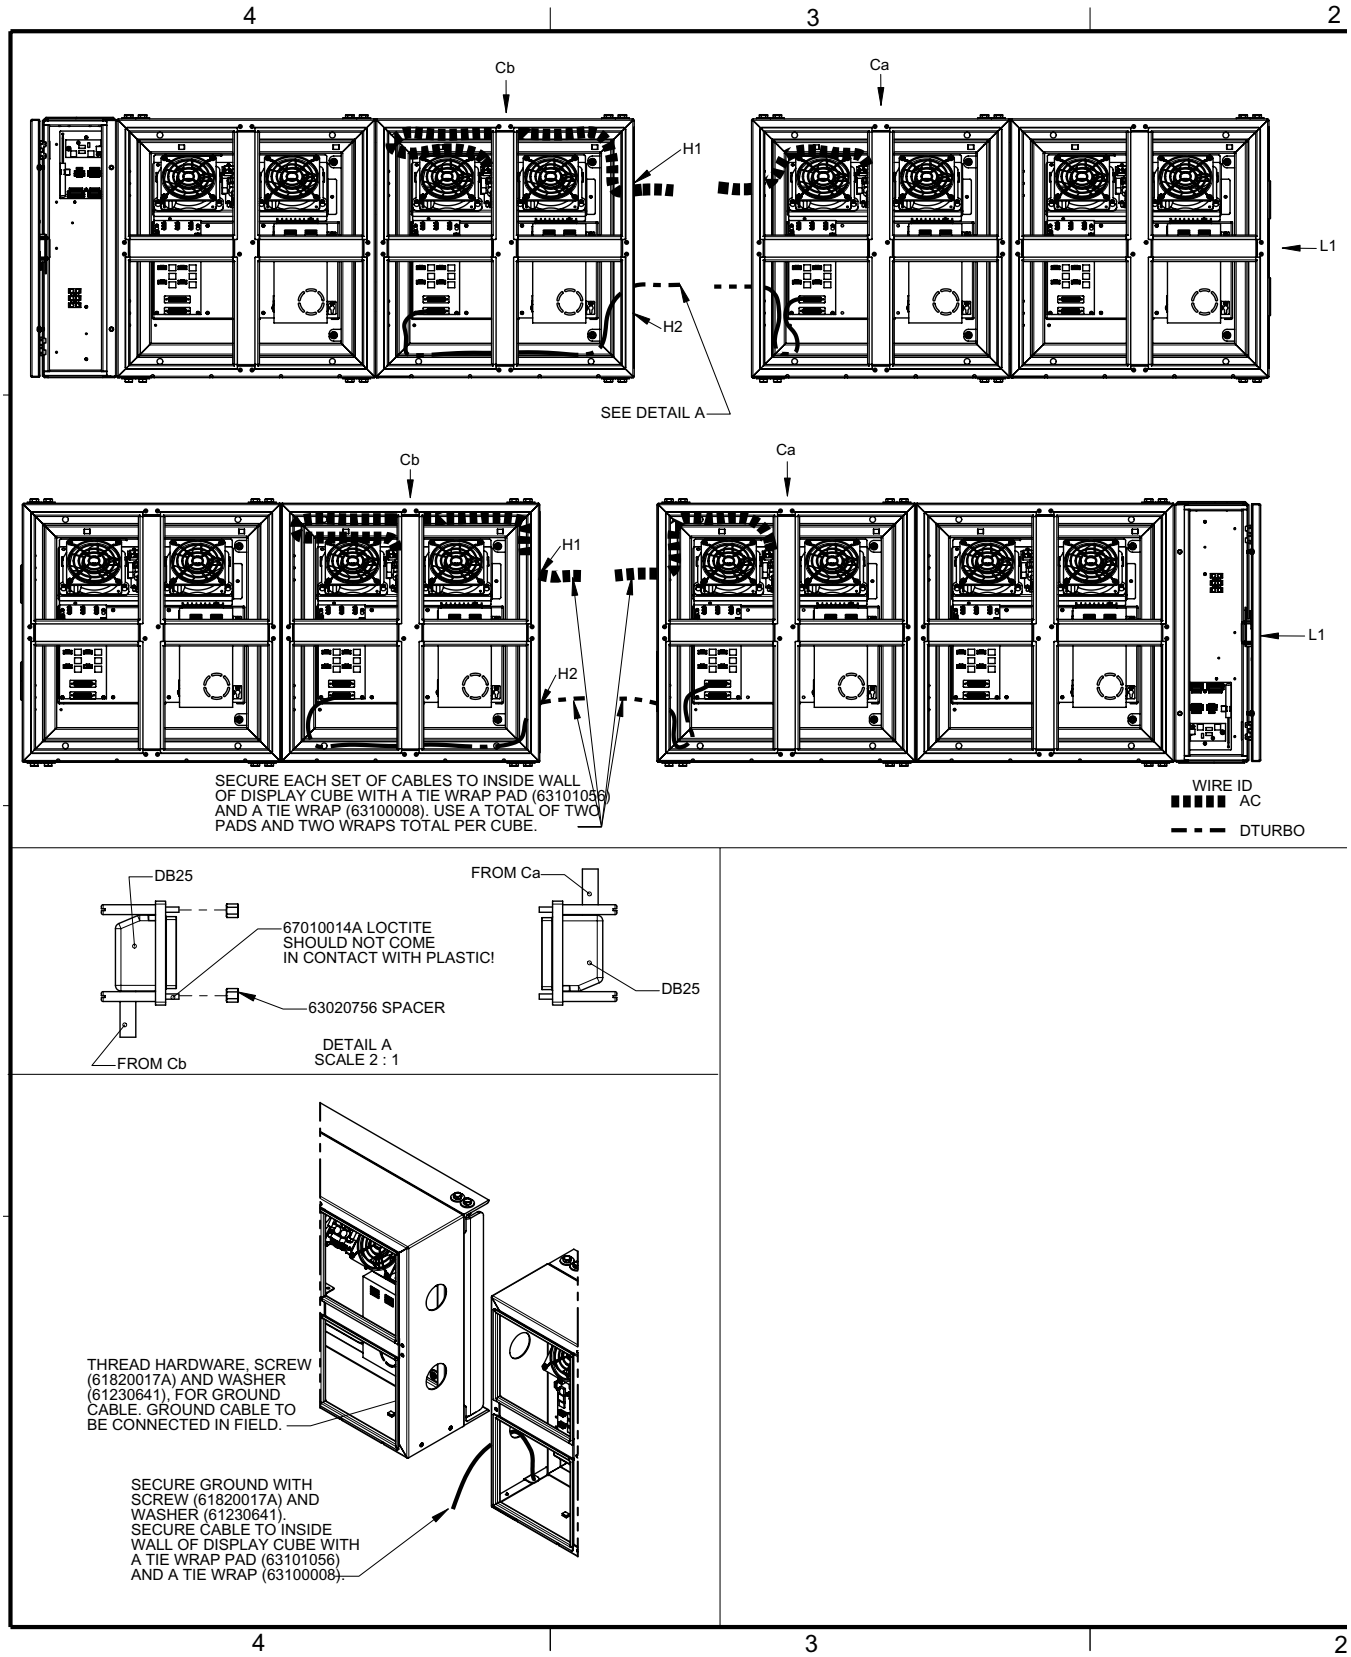

SPLIT SECTION WIRING

Between Ca & Cb (Left Wireway)

	From		Via			To	
Name	Module No.	Name	Wire No.	Color	Length	Module No.	Name
AC	LxCb	PCB1-P2	71120304	N/A	24"	LxCb	H1
		AP-TB1-B1	71120301	BLK	50"	LxCb	H1
		AP-TB1-B2		WHT			
		AP-TB1-B3		GRN			
	LxCa	PCB1-P1	71120302	N/A	62"	LxCa	H1
Dturbo	LxCb	PCB2-P8	71240901	N/A	40"	LxCb	H2
	LxCa	PCB2-P7	71240901	N/A	40"	LxCa	H2
Ground	LxCa	GND2	71120116	N/A	13"	LxCa	H2

Between Ca & Cb (Right Wireway)

	From		Via			To	
Name	Module No.	Name	Wire No.	Color	Length	Module No.	Name
AC	LxCa	PCB1-P1	71120304	N/A	24"	LxCa	H1
		AP-TB1-A1	71120301	BLK	50"	LxCa	H1
		AP-TB1-A2		WHT			
		AP-TB1-A3		GRN			
	LxCb	PCB1-P2	71120302	N/A	62"	LxCb	H1
Dturbo	LxCb	PCB2-P8	71240901	N/A	40"	LxCb	H2
	LxCa	PCB2-P7	71240901	N/A	40"	LxCa	H2
Ground	LxCa	GND2	71120116	N/A	13"	LxCa	H2

DETAIL B
SCALE 1 : 3

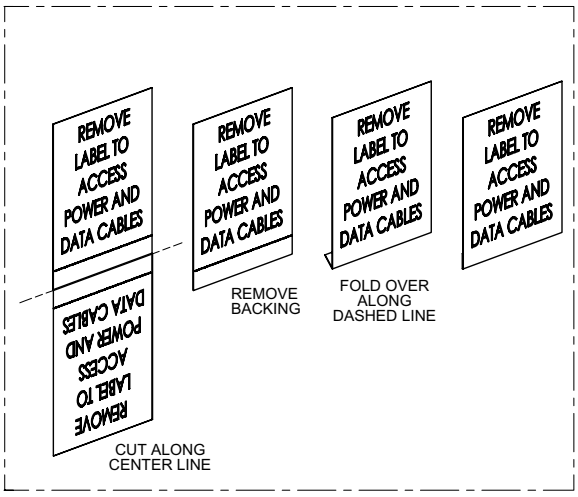

DETAIL C
SCALE 1 : 6

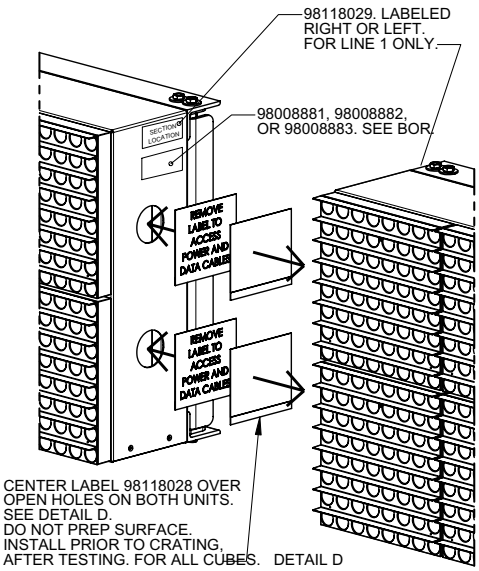

DETAIL D

NOTES:
1) REFER TO WIRING DOCUMENTATION 11800000-04, -05, -09, AND -22 FOR PCB CONNECTION DETAILS.
2) AC WIRING IS SPECIFIEC FOR EACH "SPLIT SECTION" SIGN. REFER TO THAT SIGNS'S AC WIRING DRAWING (SEE WORK ORDER).

REV.	DESCRIPTION	ECO	BY	DATE
A	RELEASED FOR PRODUCTION		SSL	12/2/03

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED
.X ±0.1
.XX ±0.02
.XXX ±0.005
ANGLES ±1°
DRAWN BY: SSL DATE: 12/2/03
CHECKED BY: DATE:
APPROVED BY: DATE:

ADAPTIVE Adaptive Micro Systems LLC 7840 North 86th Street Milwaukee, WI 53224 USA

TITLE: P1180, MULTI-SECTION, VERTICAL SPLIT ASSEMBLY

SIZE: C | DOCUMENT NO.: 11800000-15 | REVISION: A

SCALE: 1:8 | STATUS: Released | SHT: 1 of 1

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

Multi-section sign: horizontal split assembly (11800000-16, revision A)

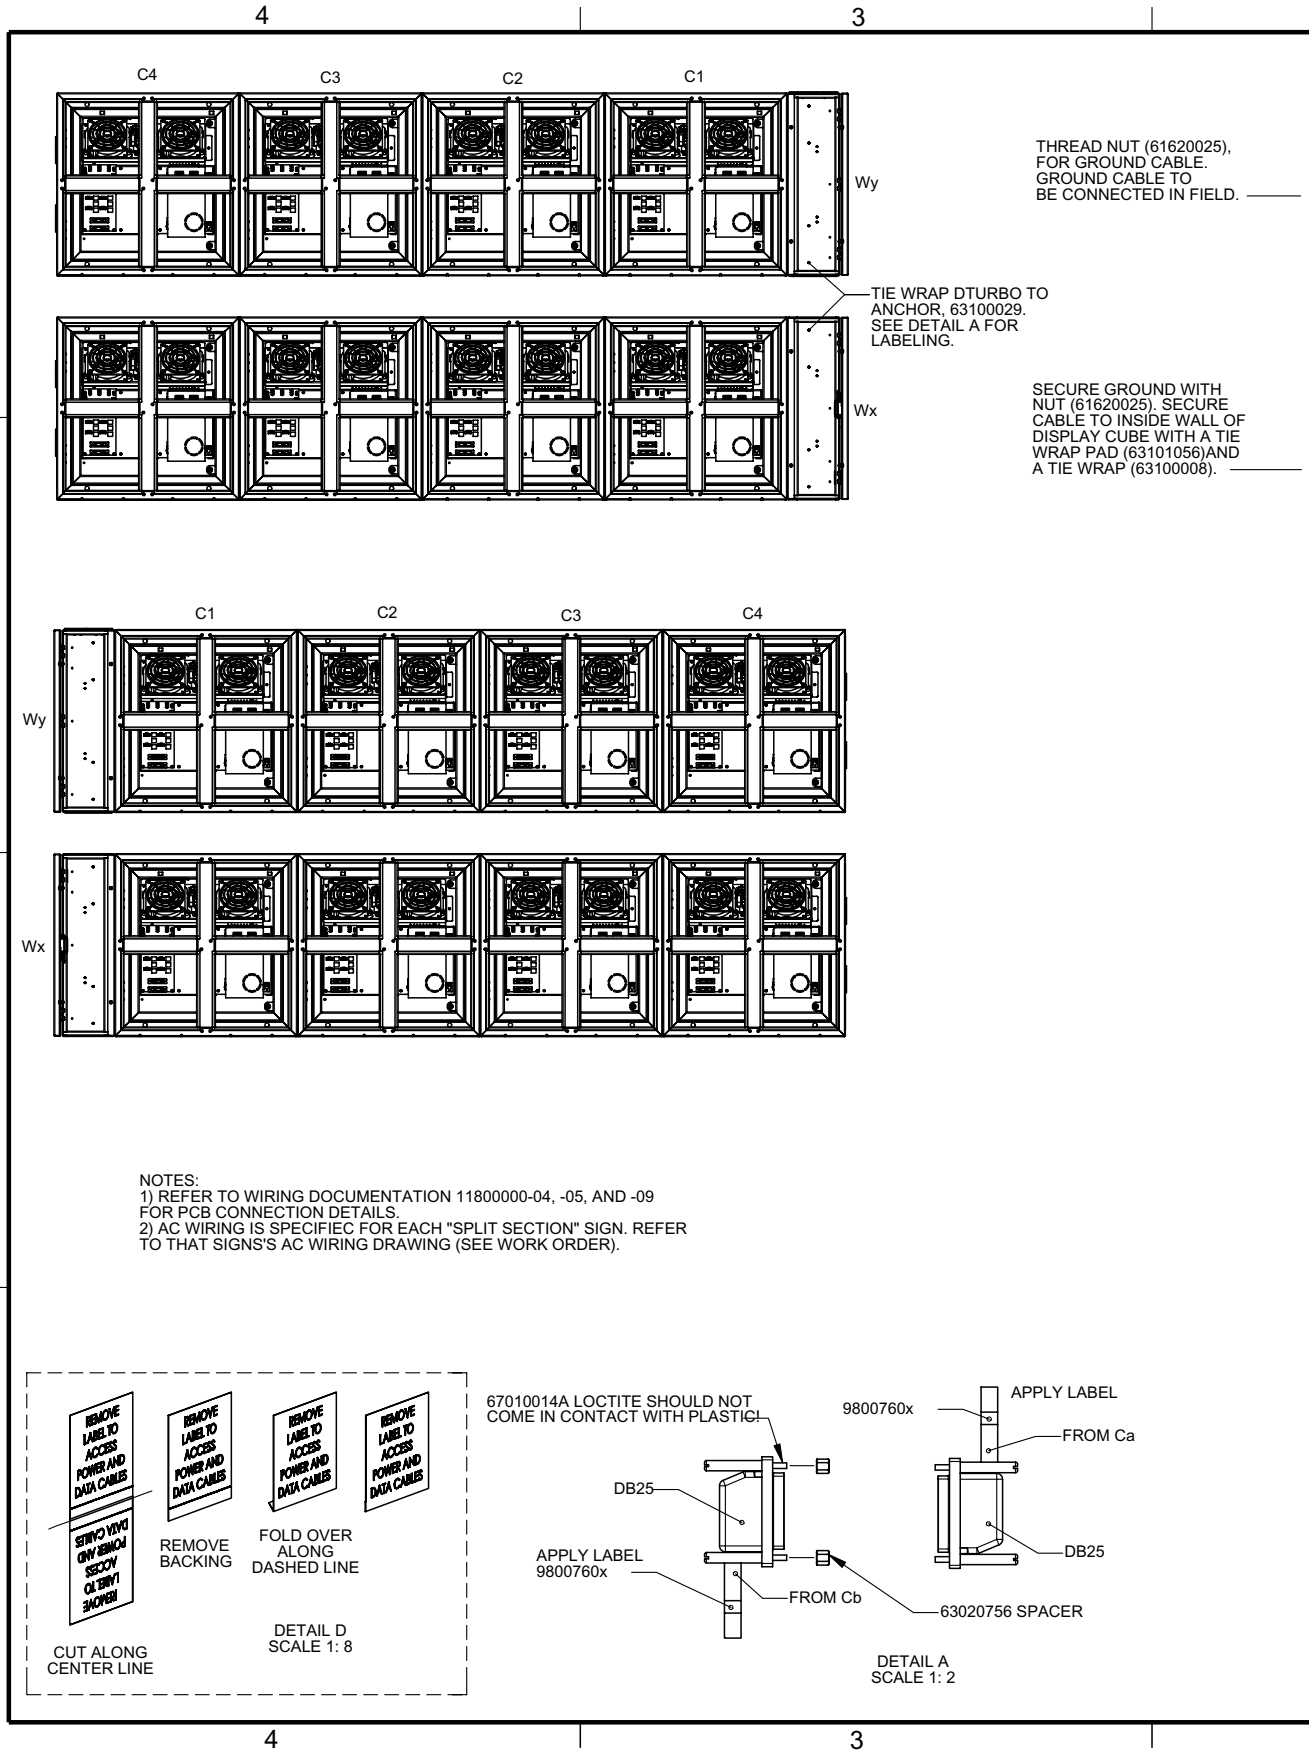

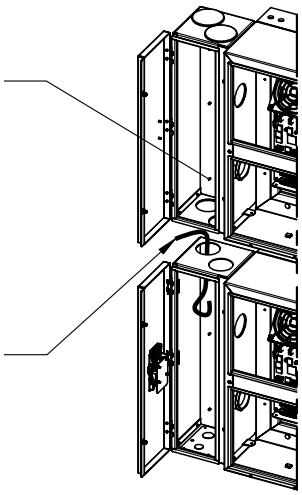

DETAIL B
SCALE 1: 8

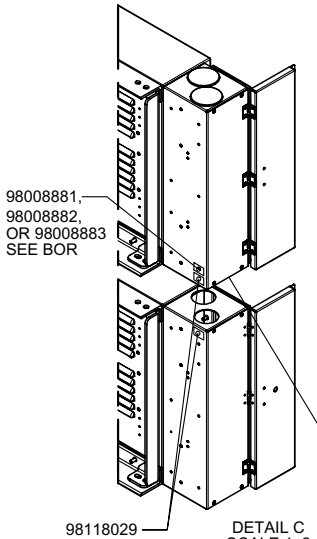

DETAIL C
SCALE 1: 2

CENTER LABEL
98118028 OVER OPEN HOLES.
SEE DETAIL D. DO NOT PREP
SURFACE. INSTALL PRIOR TO
CRATING AFTER TESTING.

SPLIT SECTION WIRING

Between Wx & Wy (Right Wireway)

	From		Via			To		Label (see
Name	Module No.	Name	Wire No.	Color	Length	Module No.	Name	Detail A)
Dturbo[1] (128 pixel total height)	L1C2	PCB6-P1	71240901	N/A	40"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71241802	N/A	114"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241803	N/A	138"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241805	N/A	162"	L4C1	PCB2-P8	98007604
	L1C2	PCB6-P5	71241805	N/A	162"	L4Wx	H3	98007605
	L1C2	PCB6-P6	71241805	N/A	162"	L4Wx	H3	98007606
	L1C2	PCB6-P7	71241805	N/A	162"	L4Wx	H3	98007607
	L1C2	PCB6-P8	71241805	N/A	162"	L4Wx	H3	98007608
	L5Wy	H3	71240901	N/A	40"	L5C1	PCB2-P8	98007605
	L5Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606
	L5Wy	H3	71240902	N/A	90"	L7C1	PCB2-P8	98007607
	L5Wy	H3	71241802	N/A	114"	L8C1	PCB2-P8	98007608
Dturbo[1] (112 pixel total height)	L1C2	PCB6-P1	71240901	N/A	40"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71241802	N/A	114"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241803	N/A	138"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241805	N/A	162"	L4C1	PCB2-P8	98007604
	L1C2	PCB6-P5	71241805	N/A	162"	L4Wx	H3	98007605
	L1C2	PCB6-P6	71241805	N/A	162"	L4Wx	H3	98007606
	L1C2	PCB6-P7	71241805	N/A	162"	L4Wx	H3	98007607
	L5Wy	H3	71240901	N/A	40"	L5C1	PCB2-P8	98007605
	L5Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606
	L5Wy	H3	71240902	N/A	90"	L7C1	PCB2-P8	98007607
Dturbo[1] (96 pixel total height)	L1C2	PCB6-P1	71240901	N/A	40"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71241802	N/A	114"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241803	N/A	138"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241803	N/A	138"	L3Wx	H3	98007604
	L1C2	PCB6-P5	71241803	N/A	138"	L3Wx	H3	98007605
	L1C2	PCB6-P6	71241803	N/A	138"	L3Wx	H3	98007606
	L4Wy	H3	71240901	N/A	40"	L4C1	PCB2-P8	98007604
	L4Wy	H3	71240902	N/A	90"	L5C1	PCB2-P8	98007605
	L4Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606

Between Wx & Wy (Left Wireway)

	From		Via			To		Label (see
Name	Module No.	Name	Wire No.	Color	Length	Module No.	Name	Detail A)
Dturbo[1] (128 pixel total height)	L1C2	PCB6-P1	71241810	N/A	52"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71240902	N/A	90"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241802	N/A	114"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241803	N/A	138"	L4C1	PCB2-P8	98007604
	L1C2	PCB6-P5	71241803	N/A	138"	L4Wx	H3	98007605
	L1C2	PCB6-P6	71241803	N/A	138"	L4Wx	H3	98007606
	L1C2	PCB6-P7	71241803	N/A	138"	L4Wx	H3	98007607
	L1C2	PCB6-P8	71241803	N/A	138"	L4Wx	H3	98007608
	L5Wy	H3	71240901	N/A	40"	L5C1	PCB2-P8	98007605
	L5Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606
	L5Wy	H3	71240902	N/A	90"	L7C1	PCB2-P8	98007607
	L5Wy	H3	71241802	N/A	114"	L8C1	PCB2-P8	98007608
Dturbo[1] (112 pixel total height)	L1C2	PCB6-P1	71241810	N/A	52"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71240902	N/A	90"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241802	N/A	114"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241803	N/A	138"	L4C1	PCB2-P8	98007604
	L1C2	PCB6-P5	71241803	N/A	138"	L4Wx	H3	98007605
	L1C2	PCB6-P6	71241803	N/A	138"	L4Wx	H3	98007606
	L1C2	PCB6-P7	71241803	N/A	138"	L4Wx	H3	98007607
	L5Wy	H3	71240901	N/A	40"	L5C1	PCB2-P8	98007605
	L5Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606
	L5Wy	H3	71240902	N/A	90"	L7C1	PCB2-P8	98007607
Dturbo[1] (96 pixel total height)	L1C2	PCB6-P1	71241810	N/A	52"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71240902	N/A	90"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241802	N/A	114"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241803	N/A	138"	L3Wx	H3	98007604
	L1C2	PCB6-P5	71241803	N/A	138"	L3Wx	H3	98007605
	L1C2	PCB6-P6	71241803	N/A	138"	L3Wx	H3	98007606
	L4Wy	H3	71240901	N/A	40"	L4C1	PCB2-P8	98007604
	L4Wy	H3	71240902	N/A	90"	L5C1	PCB2-P8	98007605
	L4Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606

1 - NOTE: USE TOTAL SIGN HEIGHT.

REV.	DESCRIPTION	ECO	BY	DATE
A	RELEASED FOR PRODUCTION		SSL	12/2/03

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED
.X ±0.1
.XX ±0.02
.XXX ±0.005
ANGLES ±1°

DRAWN BY: SSL DATE: 12/2/03
CHECKED BY: DATE:
APPROVED BY: DATE:

ADAPTIVE Adaptive Micro Systems LLC
7840 North 86th Street
Milwaukee, WI 53224 USA

TITLE: P1180, MULTI-SECTION, HORIZONTAL SPLIT ASSEMBLY

SIZE: C | DOCUMENT NO.: 11800000-16 | REVISION: A

SCALE: 1:8 | STATUS: Released | SHT 1 of 1

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

Multi-section sign: vertical/horizontal split assembly (11800000-17, revision A, sheet 1 of 2)

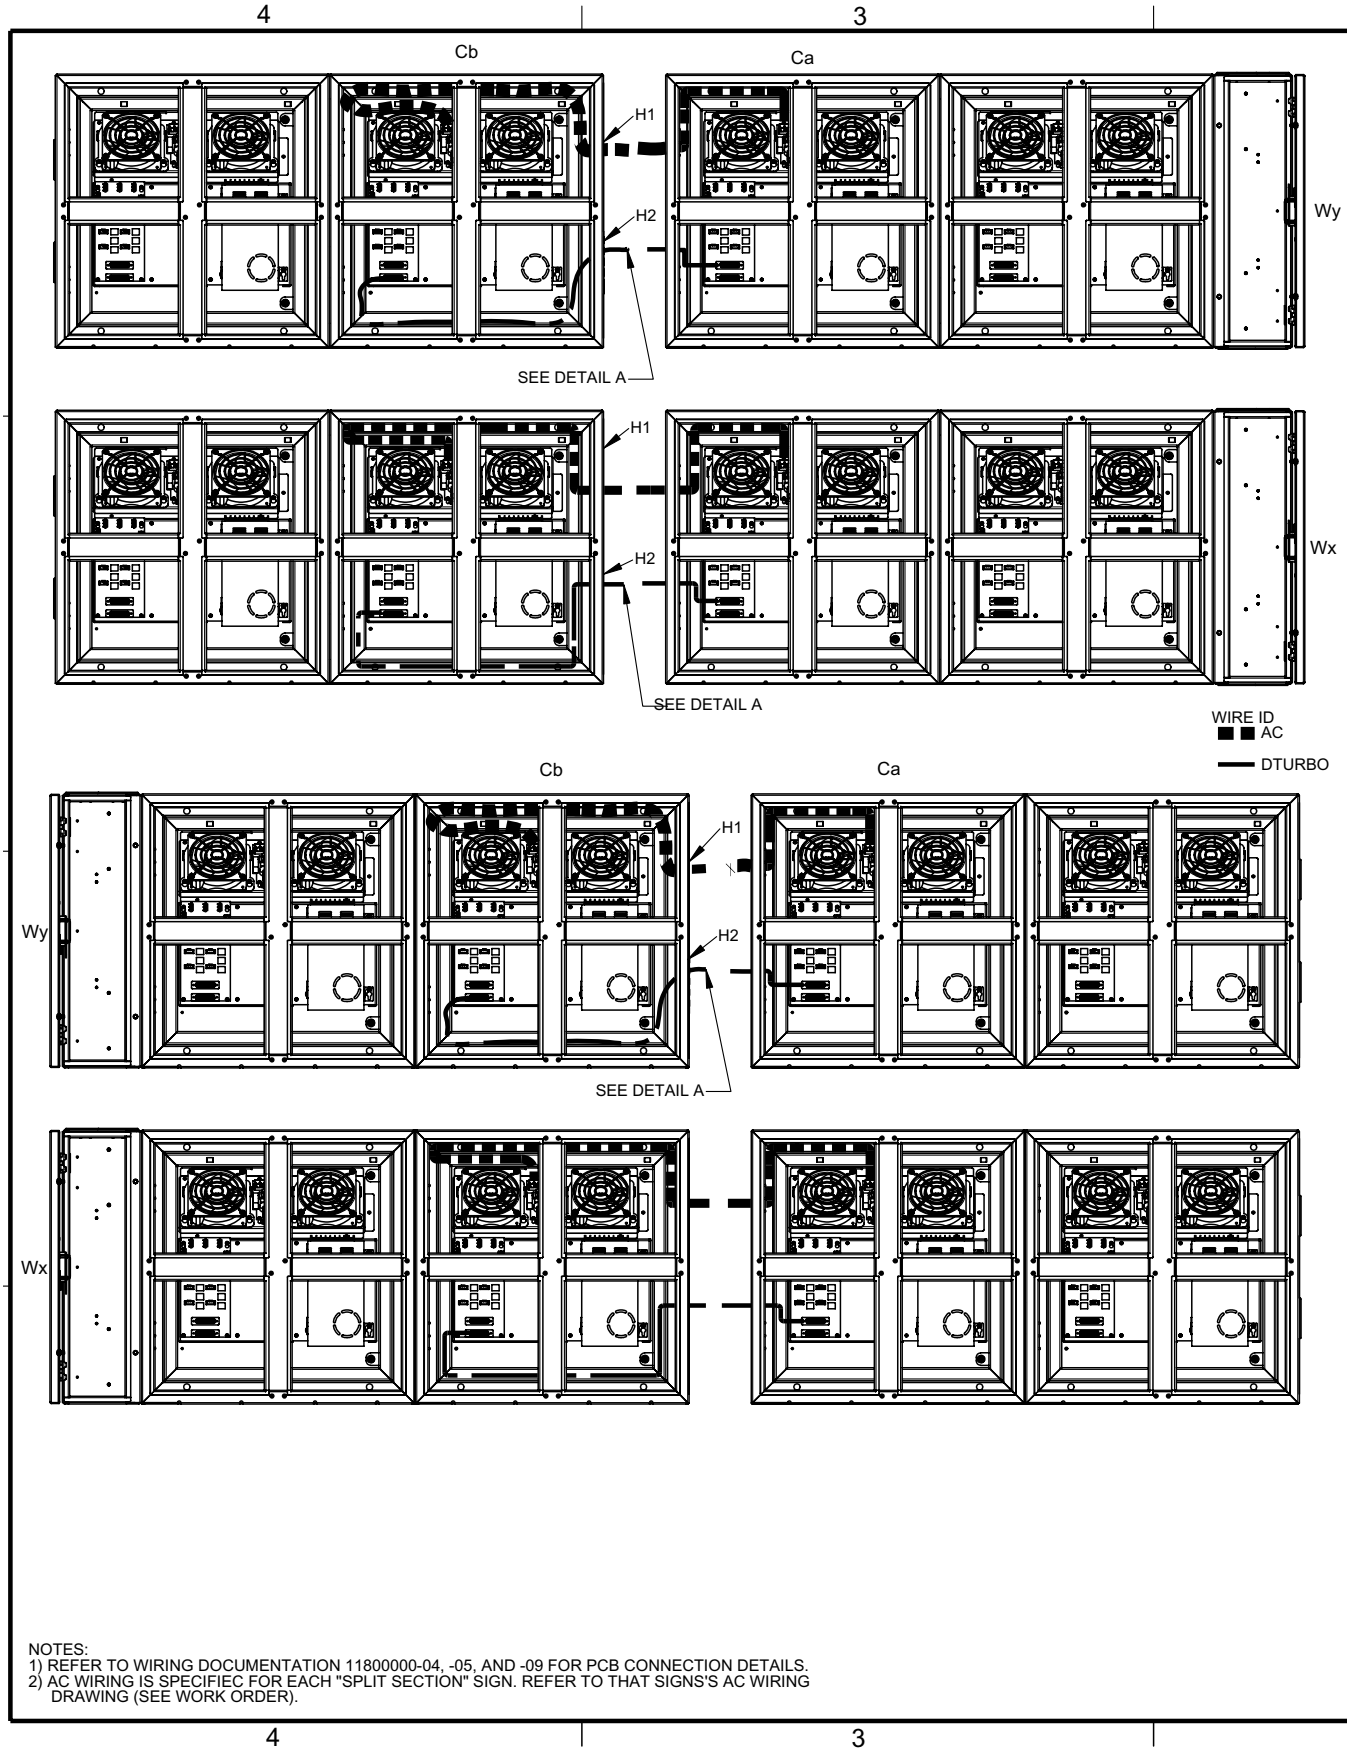

SPLIT SECTION WIRING

Between Wx & Wy (Right Wireway)

	From		Via			To		Label (see
Name	Module No.	Name	Wire No.	Color	Length	Module No.	Name	Detail A)
Dturbo[1] (128 pixel total height)	L1C2	PCB6-P1	71240901	N/A	40"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71241802	N/A	114"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241803	N/A	138"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241805	N/A	162"	L4C1	PCB2-P8	98007604
	L1C2	PCB6-P5	71241805	N/A	162"	L4Wx	H3	98007605
	L1C2	PCB6-P6	71241805	N/A	162"	L4Wx	H3	98007606
	L1C2	PCB6-P7	71241805	N/A	162"	L4Wx	H3	98007607
	L1C2	PCB6-P8	71241805	N/A	162"	L4Wx	H3	98007608
	L5Wy	H3	71240901	N/A	40"	L5C1	PCB2-P8	98007605
	L5Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606
	L5Wy	H3	71240902	N/A	90"	L7C1	PCB2-P8	98007607
	L5Wy	H3	71241802	N/A	114"	L8C1	PCB2-P8	98007608
Dturbo[1] (112 pixel total height)	L1C2	PCB6-P1	71240901	N/A	40"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71241802	N/A	114"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241803	N/A	138"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241805	N/A	162"	L4C1	PCB2-P8	98007604
	L1C2	PCB6-P5	71241805	N/A	162"	L4Wx	H3	98007605
	L1C2	PCB6-P6	71241805	N/A	162"	L4Wx	H3	98007606
	L1C2	PCB6-P7	71241805	N/A	162"	L4Wx	H3	98007607
	L5Wy	H3	71240901	N/A	40"	L5C1	PCB2-P8	98007605
	L5Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606
	L5Wy	H3	71240902	N/A	90"	L7C1	PCB2-P8	98007607
Dturbo[1] (96 pixel total height)	L1C2	PCB6-P1	71240901	N/A	40"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71241802	N/A	114"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241803	N/A	138"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241803	N/A	138"	L3Wx	H3	98007604
	L1C2	PCB6-P5	71241803	N/A	138"	L3Wx	H3	98007605
	L1C2	PCB6-P6	71241803	N/A	138"	L3Wx	H3	98007606
	L4Wy	H3	71240901	N/A	40"	L4C1	PCB2-P8	98007604
	L4Wy	H3	71240902	N/A	90"	L5C1	PCB2-P8	98007605
	L4Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606

Between Wx & Wy (Left Wireway)

	From		Via			To		Label (see
Name	Module No.	Name	Wire No.	Color	Length	Module No.	Name	Detail A)
Dturbo[1] (128 pixel total height)	L1C2	PCB6-P1	71241810	N/A	52"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71240902	N/A	90"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241802	N/A	114"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241803	N/A	138"	L4C1	PCB2-P8	98007604
	L1C2	PCB6-P5	71241803	N/A	138"	L4Wx	H3	98007605
	L1C2	PCB6-P6	71241803	N/A	138"	L4Wx	H3	98007606
	L1C2	PCB6-P7	71241803	N/A	138"	L4Wx	H3	98007607
	L1C2	PCB6-P8	71241803	N/A	138"	L4Wx	H3	98007608
	L5Wy	H3	71240901	N/A	40"	L5C1	PCB2-P8	98007605
	L5Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606
	L5Wy	H3	71240902	N/A	90"	L7C1	PCB2-P8	98007607
	L5Wy	H3	71241802	N/A	114"	L8C1	PCB2-P8	98007608
Dturbo[1] (112 pixel total height)	L1C2	PCB6-P1	71241810	N/A	52"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71240902	N/A	90"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241802	N/A	114"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241803	N/A	138"	L4C1	PCB2-P8	98007604
	L1C2	PCB6-P5	71241803	N/A	138"	L4Wx	H3	98007605
	L1C2	PCB6-P6	71241803	N/A	138"	L4Wx	H3	98007606
	L1C2	PCB6-P7	71241803	N/A	138"	L4Wx	H3	98007607
	L5Wy	H3	71240901	N/A	40"	L5C1	PCB2-P8	98007605
	L5Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606
	L5Wy	H3	71240902	N/A	90"	L7C1	PCB2-P8	98007607
Dturbo[1] (96 pixel total height)	L1C2	PCB6-P1	71241810	N/A	52"	L1C1	PCB2-P8	98007601
	L1C2	PCB6-P2	71240902	N/A	90"	L2C1	PCB2-P8	98007602
	L1C2	PCB6-P3	71241802	N/A	114"	L3C1	PCB2-P8	98007603
	L1C2	PCB6-P4	71241803	N/A	138"	L3Wx	H3	98007604
	L1C2	PCB6-P5	71241803	N/A	138"	L3Wx	H3	98007605
	L1C2	PCB6-P6	71241803	N/A	138"	L3Wx	H3	98007606
	L4Wy	H3	71240901	N/A	40"	L4C1	PCB2-P8	98007604
	L4Wy	H3	71240902	N/A	90"	L5C1	PCB2-P8	98007605
	L4Wy	H3	71240902	N/A	90"	L6C1	PCB2-P8	98007606

1 - NOTE: USE TOTAL SIGN HEIGHT.

SPLIT SECTION WIRING

Between Ca & Cb (Left Wireway)

	From		Via			To	
Name	Module No.	Name	Wire No.	Color	Length	Module No.	Name
AC	LxCb	PCB1-P2	71120304	N/A	24"	LxCb	H1
	LxCb	AP-TB1-B1	71120301	BLK	50"	LxCb	H1
		AP-TB1-B2		WHT			
		AP-TB1-B3		GRN			
	LxCa	PCB1-P1	71120302	N/A	62"	LxCa	H1
Dturbo	LxCb	PCB2-P8	71240901	N/A	40"	LxCb	H2
	LxCa	PCB2-P7	71240901	N/A	40"	LxCa	H2
Ground	LxCa	GND2	71120116	N/A	13"	LxCa	H2

Between Ca & Cb (Right Wireway)

	From		Via			To	
Name	Module No.	Name	Wire No.	Color	Length	Module No.	Name
AC	LxCa	PCB1-P1	71120304	N/A	24"	LxCa	H1
	LxCa	AP-TB1-A1	71120301	BLK	50"	LxCa	H1
		AP-TB1-A2		WHT			
		AP-TB1-A3		GRN			
	LxCb	PCB1-P2	71120302	N/A	62"	LxCb	H1
Dturbo	LxCb	PCB2-P8	71240901	N/A	40"	LxCb	H2
	LxCa	PCB2-P7	71240901	N/A	40"	LxCa	H2
Ground	LxCa	GND2	71120116	N/A	13"	LxCa	H2

REV.	DESCRIPTION	ECO	BY	DATE
A	RELEASED FOR PRODUCTION		SSL	12/2/03

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED

.X	±0.1
.XX	±0.02
.XXX	±0.005
ANGLES	±1°

DRAWN BY: SSL DATE: 12/2/03
CHECKED BY: DATE:
APPROVED BY: DATE:

ADAPTIVE Adaptive Micro Systems LLC
7840 North 86th Street
Milwaukee, WI 53224 USA

TITLE: P1180, MULTI-SECTION, VERT/HOR SPLIT ASSEMBLY

SIZE: C | DOCUMENT NO.: 11800000-17 | REVISION: A

SCALE: 1:8 | STATUS: Released | SHT: 1 of 2

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

Multi-section sign: vertical/horizontal split assembly (11800000-17, revision A, sheet 2 of 2)

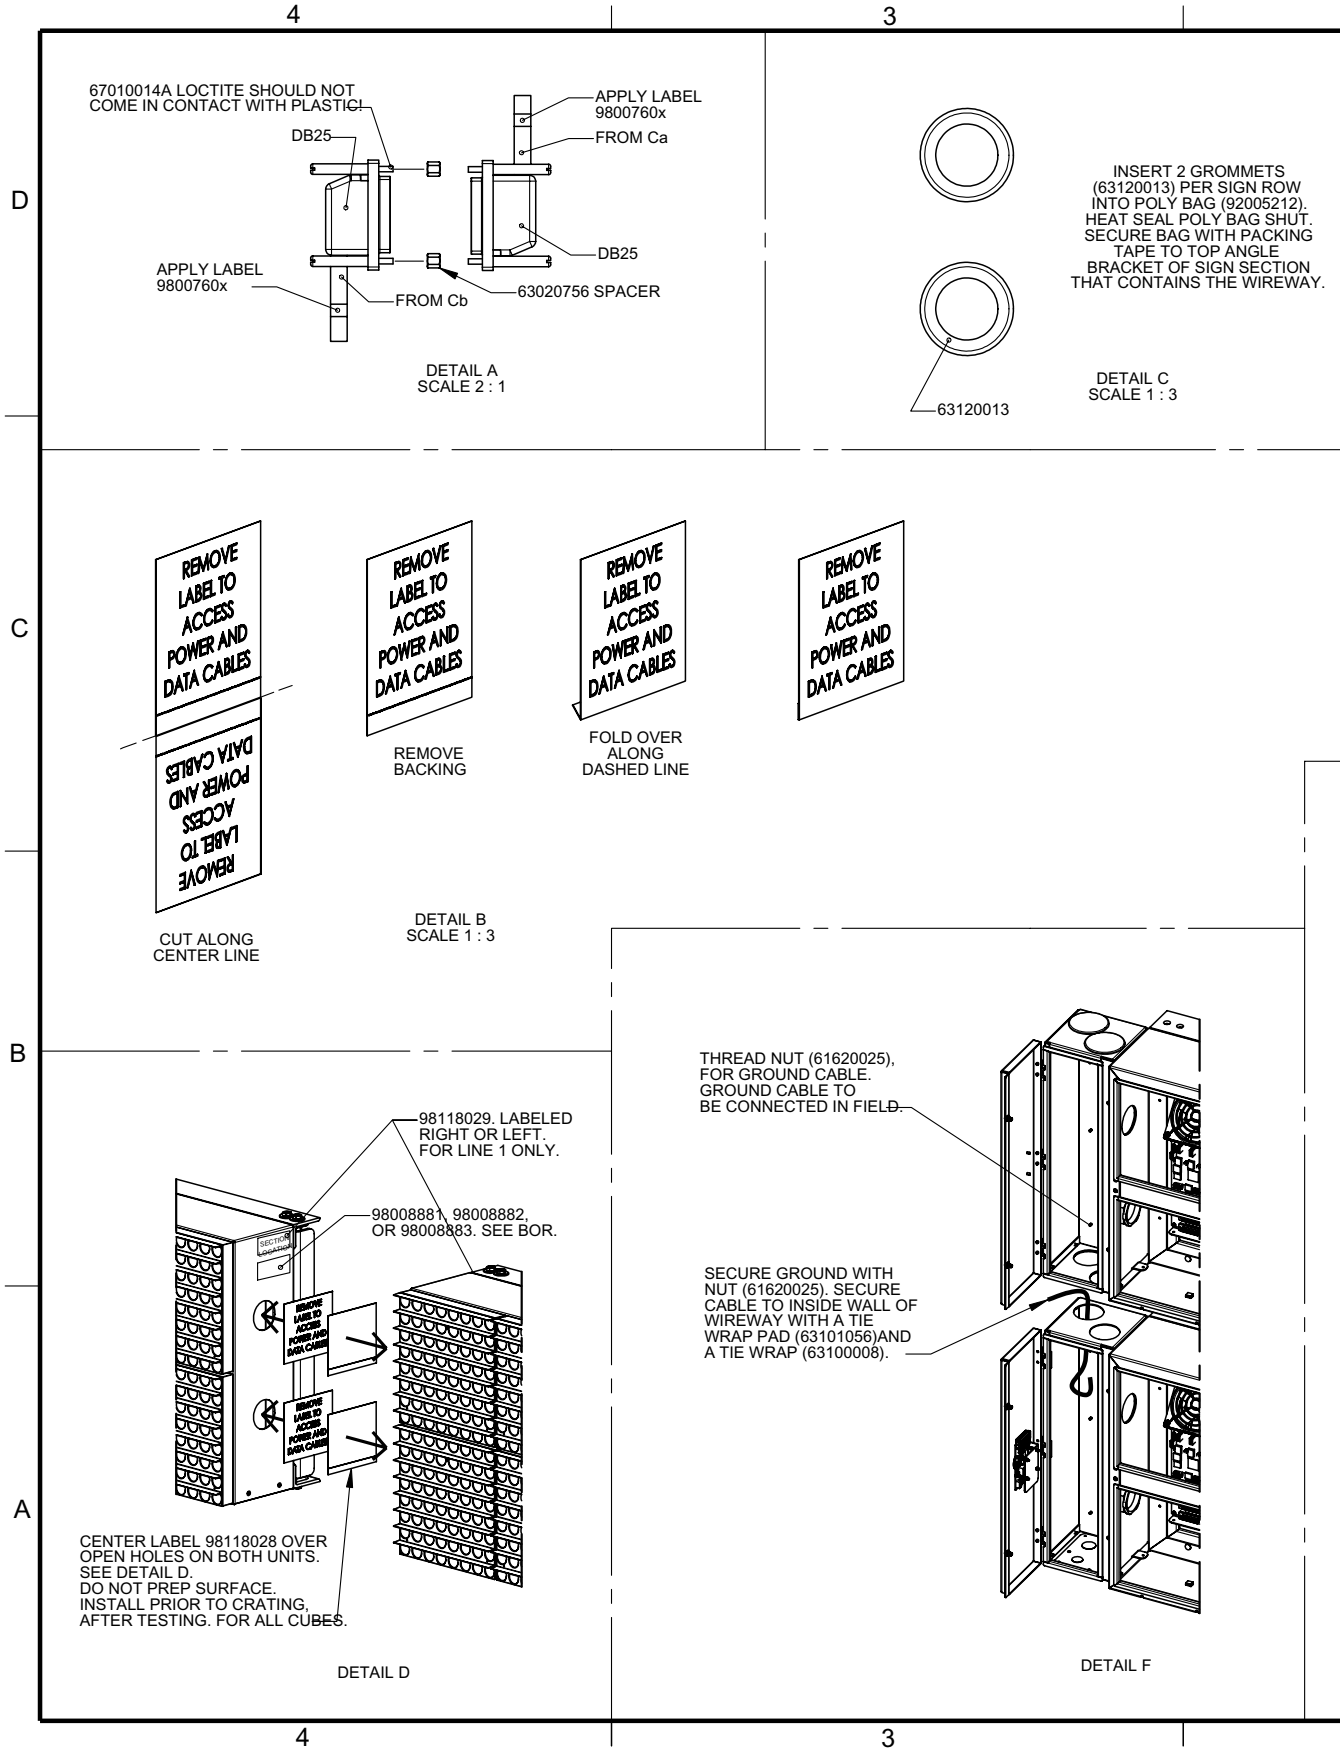

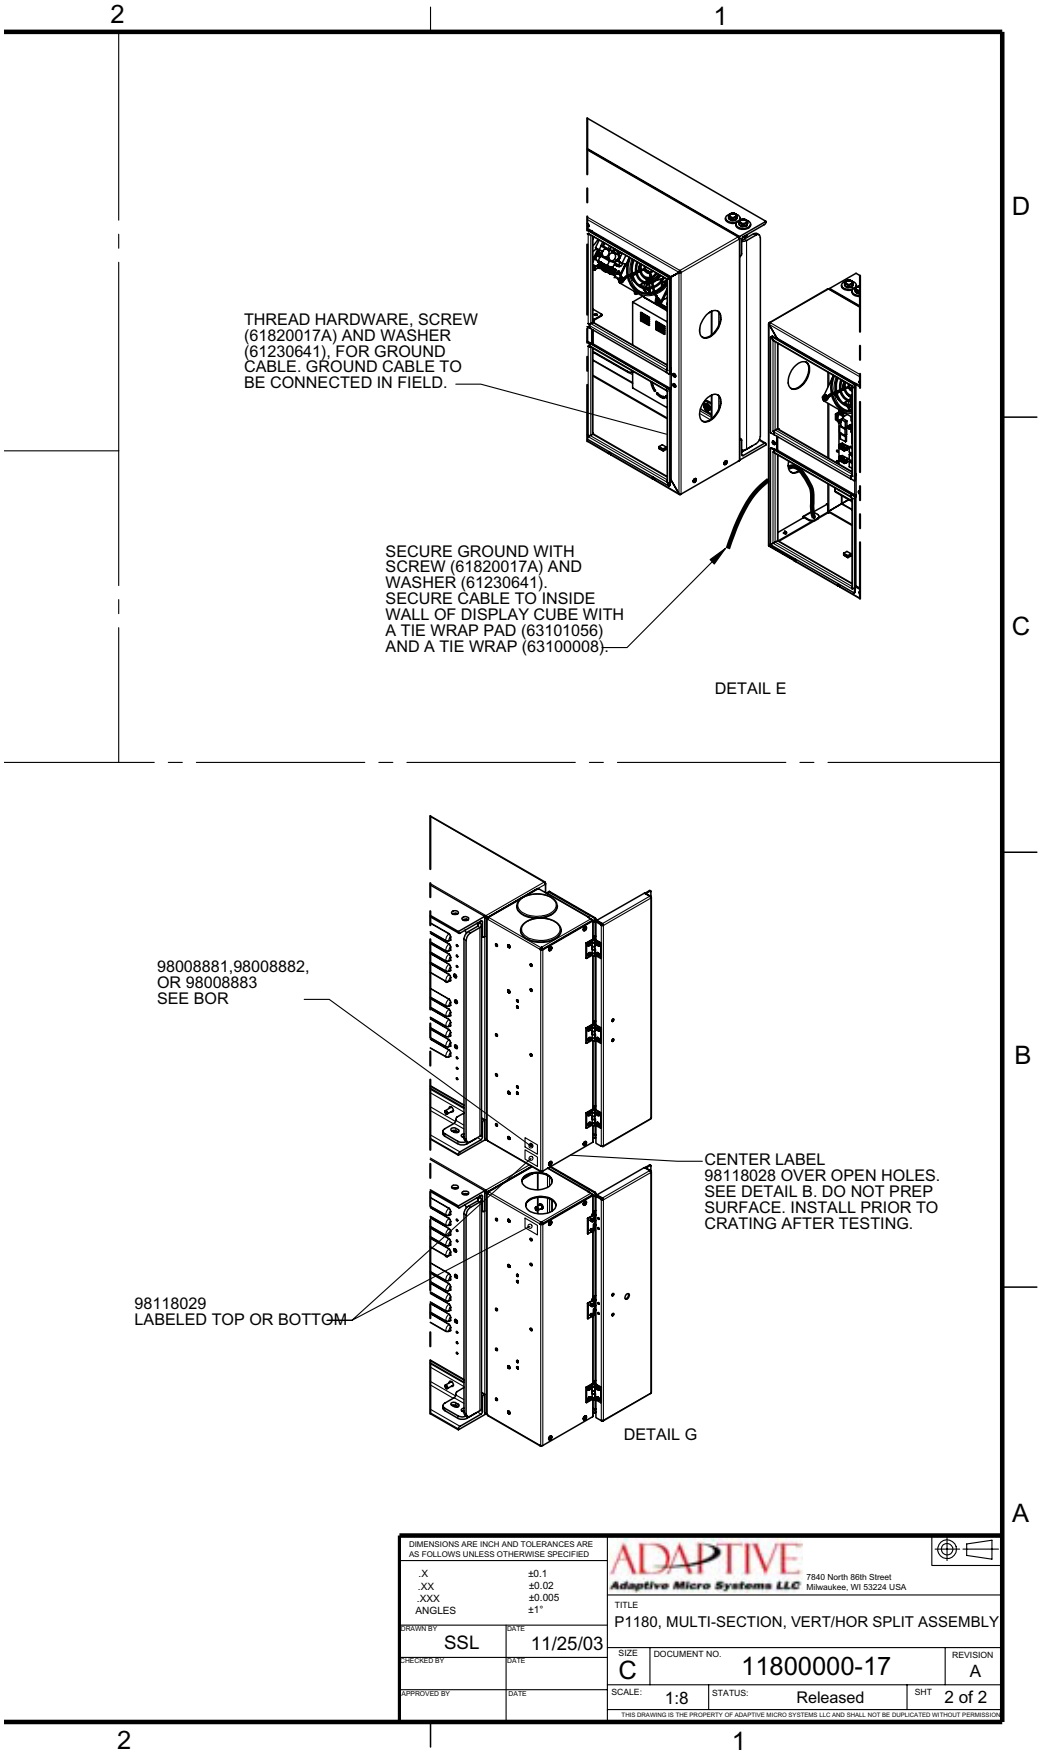
2
1
D
C
B
A
THREAD HARDWARE, SCREW (61820017A) AND WASHER (61230641), FOR GROUND CABLE. GROUND CABLE TO BE CONNECTED IN FIELD.
SECURE GROUND WITH SCREW (61820017A) AND WASHER (61230641). SECURE CABLE TO INSIDE WALL OF DISPLAY CUBE WITH A TIE WRAP PAD (63101056) AND A TIE WRAP (63100008).
DETAIL E
98008881,98008882, OR 98008883 SEE BOR
CENTER LABEL 98118028 OVER OPEN HOLES. SEE DETAIL B. DO NOT PREP SURFACE. INSTALL PRIOR TO CRATING AFTER TESTING.
98118029 LABELED TOP OR BOTTOM
DETAIL G
DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED
.X ±0.1
.XX ±0.02
.XXX ±0.005
ANGLES ±1°
DRAWN BY SSL
DATE 11/25/03
CHECKED BY
DATE
APPROVED BY
DATE
ADAPTIVE
Adaptive Micro Systems LLC
7840 North 86th Street
Milwaukee, WI 53224 USA
TITLE
P1180, MULTI-SECTION, VERT/HOR SPLIT ASSEMBLY
SIZE C
DOCUMENT NO. 11800000-17
REVISION A
SCALE: 1:8
STATUS: Released
SHT 2 of 2
THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION
2
1

Left wireway multi-cube wiring diagram (11800000-22, revision B, sheet 1 of 2)

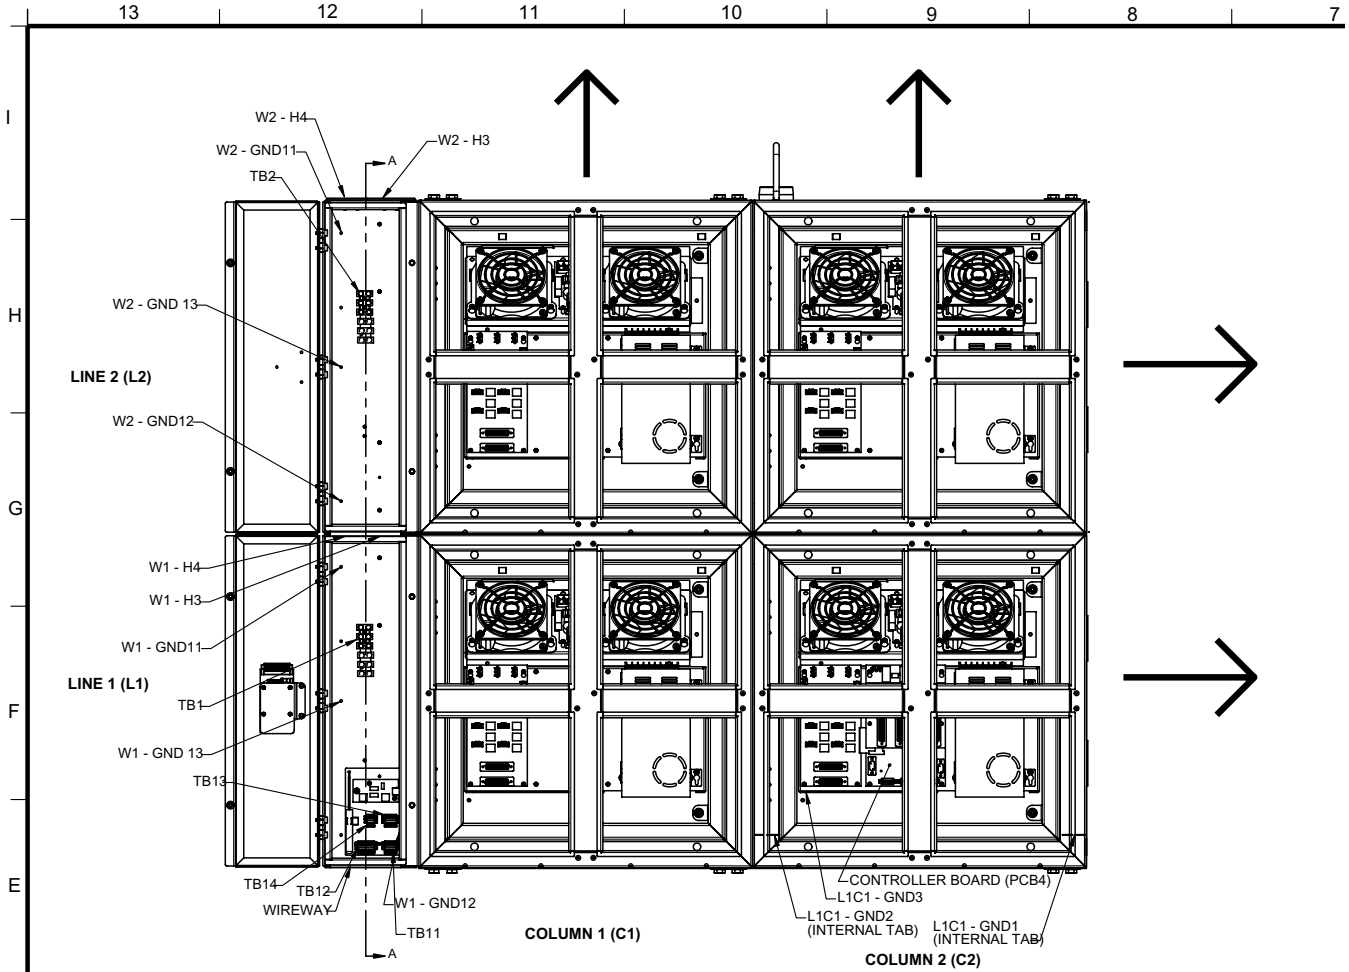

MULTI MODULE FRONT VIEW



DETAIL V
EIGHT CHANNEL CONTROLLER
TYPICAL WIRE ROUTING

NOTES:

1) ALL WIRES MUST BE ROUTED FROM THEIR ORIGIN TO THE HINGE AND THEN CONTINUE (AS SHOWN IN DETAIL B) TO ALLOW DOOR TO OPEN TO ITS FULLEST EXTENT.

2) ON COMPLETION OF WIRING, APPLY ANTI-CORROSION SPRAY (P/N 67010018) TO ALL AC ADAPTER BOARDS (P1-P5), ALL TERMINAL BLOCKS, CONTROLLER BOARD (P1), ALL POWER SUPPLY TERMINALS (PS), ALL TURBO BOARD CONNECTIONS (TB1-TB7 AS NEEDED), AND ALL DRIVER BOARD CONNECTIONS (P3-P4). BE CAUTIOUS NOT TO SPRAY ANY LABELS AS THE ANTI-CORROSION SPRAY WILL DAMAGE THE LABEL'S ADHESIVE. APPLY AS A FINE MIST ONLY OVER THE WIRE CRIMP (MORE IS NOT BETTER).

3) ALL GROUND CONNECTORS (GND1, GND2, AND GND3 IN EVERY MODULE) REQUIRE A STAR WASHER (P/N 61820017A) BETWEEN PANELS AND CONNECTORS AND BETWEEN TWO CONNECTORS. USE SCREW (P/N 61230641) FOR CONNECTIONS.

4) ALL GROUND CONNECTIONS (GND1 AND GND2 IN EVERY WIREWAY) REQUIRE A STAR WASHER (P/N 61820017A) BETWEEN PANELS AND CONNECTORS AND BETWEEN TWO CONNECTORS. USE NUT (P/N 61620025) FOR CONNECTIONS.

5) FOR AC WIRING USE AID 11800000-09 AND TABLE ON PAGE 2.

6) TIE WRAP TURBO AND AC WIRES IN WIREWAY AS NECESSARY. USE ANCHOR 63100029 WITH NUT 62512603 (SEE DETAIL M).

7) REMOVE PROTECTIVE CAP FROM PCB1-SW1.

8) APPLY RTV (P/N 66000002) TO PCB1-P2 (UNUSED TERMINAL PINS) ON THE RIGHT END CUBE.

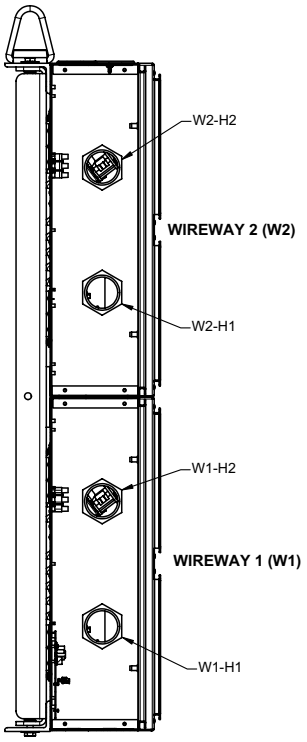

SECTION A-A
SCALE 1 : 5



DETAIL V
FOUR CHANNEL CONTROLLER
TYPICAL WIRE ROUTING

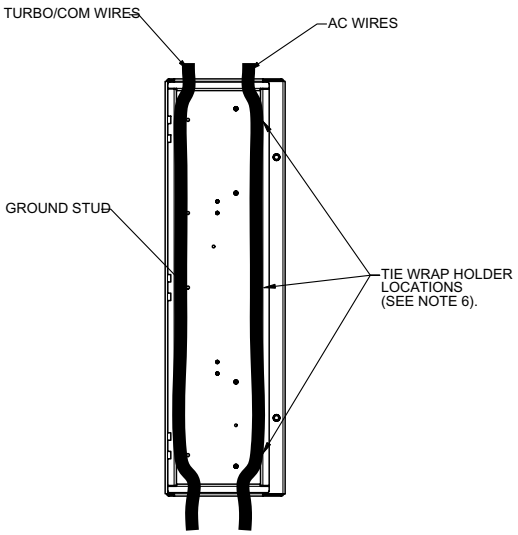

DETAIL M
TYPICAL WIRING-WIREWAY
FRONT VIEW

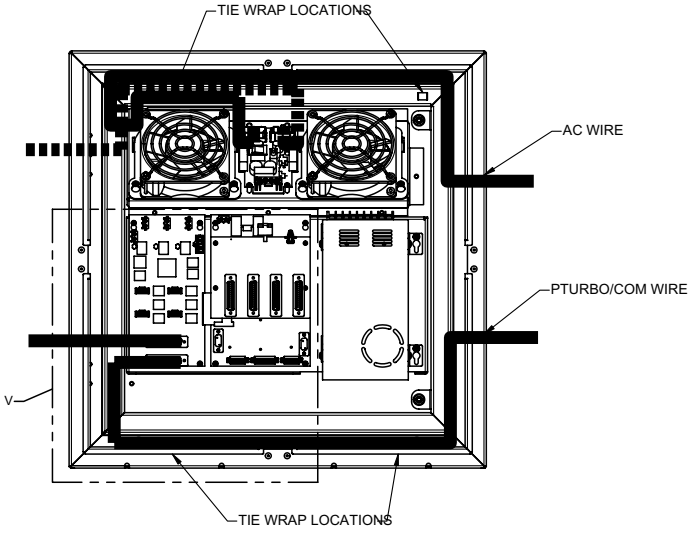

DETAIL B
SINGLE CUBE
FRONT VIEW

DEFINITIONS	
TERM	*DESCRIPTION*
TB	TERMINAL BLOCK
PCB1	AC DISTRIBUTION BOARD
PCB2	TURBO ADAPTER BOARD
PCB3	THE TERMINATOR
PCB4	CONTROLLER BOARD
PCB5	TURBO DAUGHTER BRD (4CH)
PCB6	TURBO DAUGHTER BRD (8CH)
PCB7	LIGHT SENSOR
PCB8	FEMALE/FEMALE PCB
DB	DRIVER BOARD
L	LINE
C	COLUMN
W	WIREWAY
PS	POWER SUPPLY
AP	ACCESSORY PLATE
A/R	AS REQUIRED

REV.	DESCRIPTION	ECO	BY	DATE
B	UPDATED BORDER TEMPLATE	8744	RD M	9/14/2004
A	RELEASED FOR PRODUCTION	-	SSL	4/17/04

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED
.X ±0.1
.XX ±0.02
.XXX ±0.005
ANGLES ±1°

DESIGNED BY: SSL 4/17/04
DRAWN BY: SSL 4/17/04
APPROVED BY: DATE:

ADAPTIVE Adaptive Micro Systems LLC 7840 North 86th Street Milwaukee, WI 53224 USA

TITLE: P1180 MULTI CUBE WIRING DIAGRAM L W/WAY

SIZE: D | DOCUMENT NO.: 11800000-22 | REVISION: B
SCALE: 1:4 | STATUS: Released | SHT: 1 of 2

THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION

Left wireway multi-cube wiring diagram (11800000-22, revision B, sheet 2 of 2)

INTERCUBE WIRING

Module-to-Module

From			Via			To		Detail
Name	Module No.	Name	Wire No.	Color	Length	Module No.	Name	
DTurbo	LxCx	PCB2-P8	71240901	N/A	40"	LxCy	PCB2-P7	F,B
Safety Ground	Wx	GND11	71120116	GRN/YLW	13"	Wy	GND12	Note 3,4
	LxCx	GND3	71120116	GRN/YLW	13"	LxCx	GND2	
	LxCx	GND2	71120116	GRN/YLW	13"	LxCy	GND1	

Controller Board/Wireway

From			Via			To		Detail
Name	Module No.	Name	Wire No.	Color	Length	Module No.	Name	
Controller Board DC	L1C2	PCB4-P1	71160249	RED	16"	L1C2	PS-V+	G,Q
				BLK			PS-V-	G,Q
Dturbo[1]	L1C2	PCB5/6-P1	71241810	N/A	52"	L1C1	PCB8-P2	H,L,V
	L1C1	PCB8-P1	N/A	N/A	N/A	L1C1	PCB2-P7	V,F
	L1Cz	PCB3-P1	N/A	N/A	N/A	L1Cz	PCB2-P8	F,J
	L1C2	PCB5/6-P2	71240902	N/A	90"	L2C1	PCB2-P8	H,L,F
	L2C1	PCB8-P1	N/A	N/A	N/A	L2C1	PCB2-P7	V,F
	L2Cz	PCB3-P1	N/A	N/A	N/A	L2Cz	PCB2-P8	F,J
	L1C2	PCB5/6-P3	71241802	N/A	114"	L3C1	PCB2-P8	H,L,F
	L3C1	PCB8-P1	N/A	N/A	N/A	L3C1	PCB2-P7	V,F
	L3Cz	PCB3-P1	N/A	N/A	N/A	L3Cz	PCB2-P8	F,J
	L1C2	PCB5/6-P4	71241803	N/A	138"	L4C1	PCB2-P8	H,L,F
	L4C1	PCB8-P1	N/A	N/A	N/A	L4C1	PCB2-P7	V,F
	L4Cz	PCB3-P1	N/A	N/A	N/A	L4Cz	PCB2-P8	F,J
	L1C2	PCB6-P5	71241805	N/A	162"	L5C1	PCB2-P8	L,F
	L5C1	PCB8-P1	N/A	N/A	N/A	L5C1	PCB2-P7	V,F
	L5Cz	PCB3-P1	N/A	N/A	N/A	L5Cz	PCB2-P8	F,J
COM0[2]	L1C2	PCB4-P14	71220501	N/A	75"	W1	TB11	G,C,B
COM2[2]	L1C2	PCB4-P15	71220708	N/A	75"	W1	TB12	G,C,B
COM3[2]	L1C2	PCB4-P16	71220501	N/A	75"	W1	TB13	G,C,B
COMO (RS232)[2]	L1C2	PCB4-P7	71200302	BLK	75"	W1	TB14-A1	G,C,B
				RED			TB14-A2	G,C,B
				WHT			TB14-A3	G,C,B
Photocell	W1	PCB7-P1	71220708	N/A	24"	W1	TB12	C,S

1 - NOTE: CONNECT AS NECESSARY. ALL AVAILABLE LINES MUST BE CONNECTED
2 - NOTE: REFER TO DETAIL U FOR CONTROLLER TERMINAL BLOCK DETAIL.
x - NOTE: DENOTES ONE OF SEVERAL CONSECUTIVE ITEMS (I.E. L1Cx COULD REPRESENT L1C1, L1C2, ETC.).
y - NOTE: DENOTES AN ITEM ONE GREATER THAN AN ITEM DESIGNATED BY AN "x" IN THE SAME LINE.
z - NOTE: DENOTES THE FAR RIGHT CUBE (WHEN VIEWED FROM FRONT).

AC WIRING[1]

	From Wireway		Via			To Sign Modules		
Name	Module No.	Name	Wire No.	Color	Length	Module No.	Name	Detail
Module-to-Wireway	*	TBx-A1-HI/LO	71120301	BLK	50"	*	PCB1-P1	D,E,M,N
		TBx-A2-HI/LO		WHT				
		TBx-A3-HI/LO		GRN				
Accessory Plate	*	TBx-A1-HI/LO	71120303	BLK	A/R	*	AP-TB1-A1	D,K,B,N
		TBx-A2-HI/LO		WHT			AP-TB1-A2	
		TBx-A3-HI/LO		GRN			AP-TB1-A3	
	*	AP-TB1-B1	71120301	BLK	A/R	*	PCB1-P2	D,K,E,N
		AP-TB1-B2		WHT				
		AP-TB1-B3		GRN				
Wireway-to-Wireway	*	TBx-A1-HI/LO	71120303	BLK	A/R	*	TBy-B1-HI/LO	D,M,N
		TBx-A2-HI/LO		WHT			TBy-B2-HI/LO	
		N/C		GRN	N/C[2]		N/C	
Module-to-Module	*	PCB1-P2	71120302	N/A	A/R	*	PCB1-P1	E,B
TB Ground	Wx	TBx-A3-HI/LO	71120116	GRN/YLW	A/R	Wx	GND13	D

1 - NOTE: REFER TO AID 11800000-09 FOR DETAILED INTERCONNECTION DIAGRAMS
2 - NOTE: CUT WIRE DOWN TO OUTER INSULATION
x - NOTE: DENOTES ONE OF SEVERAL CONSECUTIVE ITEMS (I.E. L1Cx COULD REPRESENT L1C1,
y - NOTE: DENOTES AN ITEM ONE GREATER THAN AN ITEM DESIGNATED BY AN "x" IN THE SAME LINE.

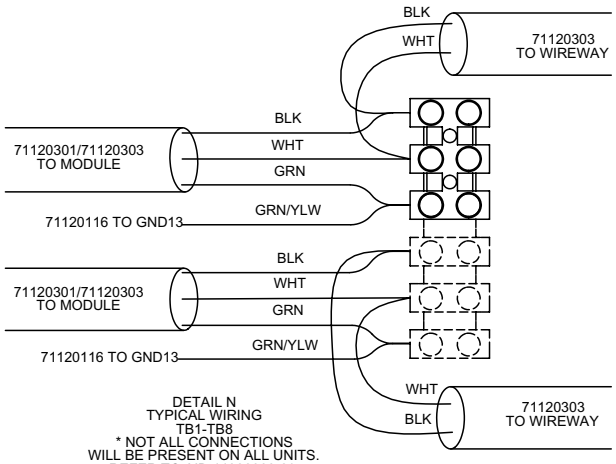

DETAIL N
TYPICAL WIRING
TB1-TB8
* NOT ALL CONNECTIONS WILL BE PRESENT ON ALL UNITS. REFER TO AID 11800000-09.



DETAIL P
DRIVER BOARD (DB1-DB4)
11809016/11809017/11809019
SCALE 1:4

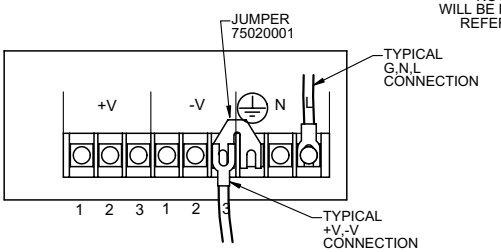

DETAIL Q
POWER SUPPLY TERMINALS (PS)
40756201
SCALE 1:1



DETAIL C
LIGHT SENSOR (PCB7)
11809022
SCALE 1:2



DETAIL D
3 OR 6 POS TB
TB1-TB8, AP-TB1



DETAIL E
AC ADAPTER BOARD (PCB1)
11809008

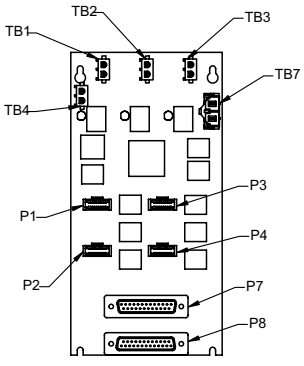

DETAIL F
TURBO ADAPTER BOARD (PCB2)
11809020/11809024

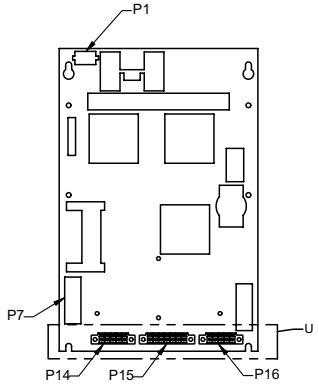

DETAIL G
4 CHANNEL
CONTROLLER BOARD (PCB4)
11809011

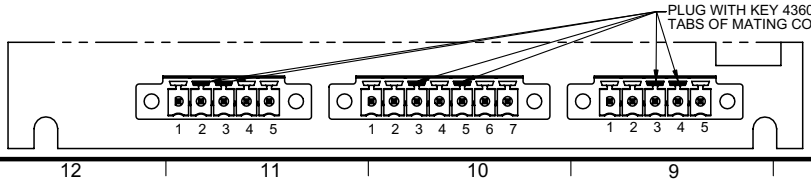

DETAIL U
SCALE 2 : 1

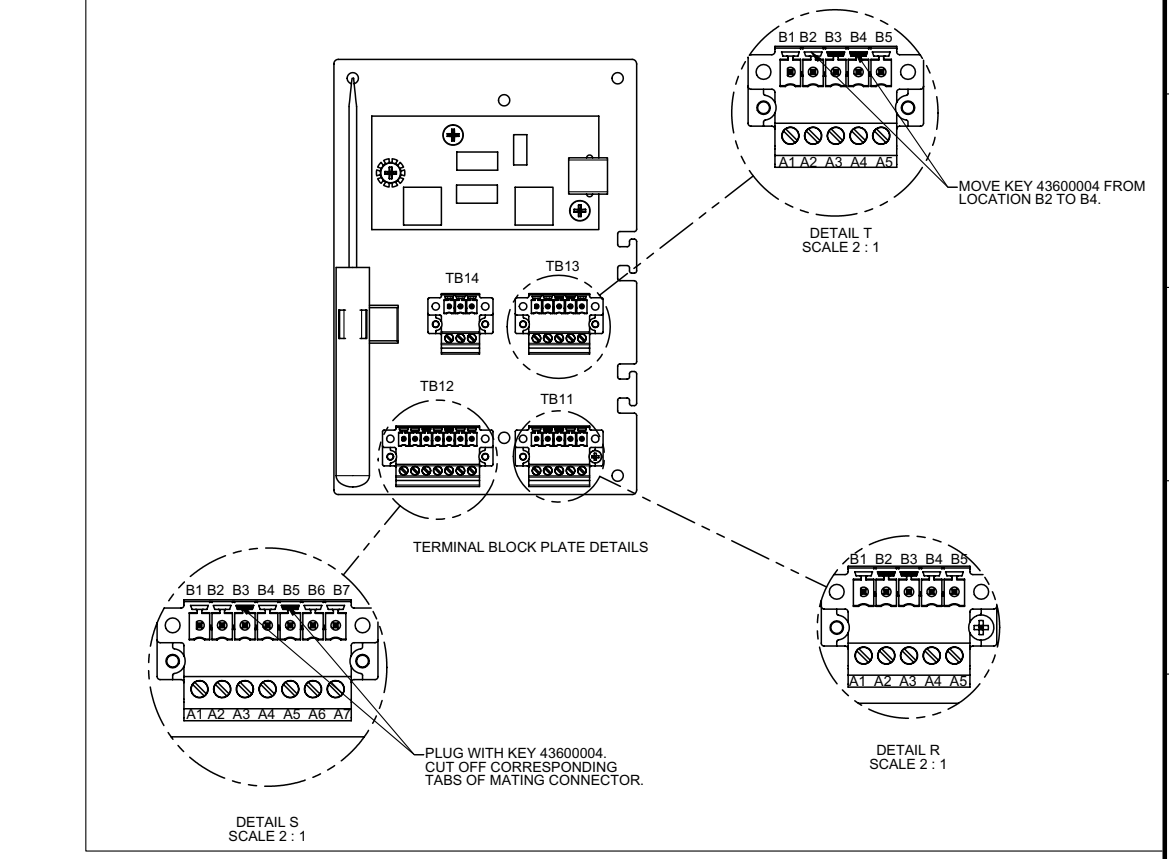



DETAIL W
FEMALE/FEMALE PCB(PCB8)
11809041



DETAIL H
4 CHANNEL TURBO
DAUGHTER BOARD (PCB5)
11809014



DETAIL J
PCB TERMINATOR
LEFT SIDE WIREWAY (PCB3)
11809040



DETAIL K
ACCESSORY PLATE (AP)
68118089
INSTALL USING 4X SCREW 61230696
INTO CONTROLLER BAORD LOCATION.
REFER TO AID 11800000-09 FOR MODULE LOCATION.



DETAIL L
8 CHANNEL TURBO
DAUGHTER BOARD (PCB6)
11809023

DIMENSIONS ARE INCH AND TOLERANCES ARE AS FOLLOWS UNLESS OTHERWISE SPECIFIED: .X ±0.1, .XX ±0.02, .XXX ±0.005, ANGLES ±1°	ADAPTIVE Adaptive Micro Systems LLC 7840 North 86th Street Milwaukee, WI 53224 USA		
	TITLE: P1180 MULTI CUBE WIRING DIAGRAM L W/WAY		
DESIGNED BY: SSL DATE: 4/17/04	SIZE: D	DOCUMENT NO.: 11800000-22	REVISION: B
DRAWN BY: SSL DATE: 4/17/04	SCALE: 1:4	STATUS: Released	SHT: 2 of 2
APPROVED BY: DATE:	THIS DRAWING IS THE PROPERTY OF ADAPTIVE MICRO SYSTEMS LLC AND SHALL NOT BE DUPLICATED WITHOUT PERMISSION.		

This page intentionally left blank.