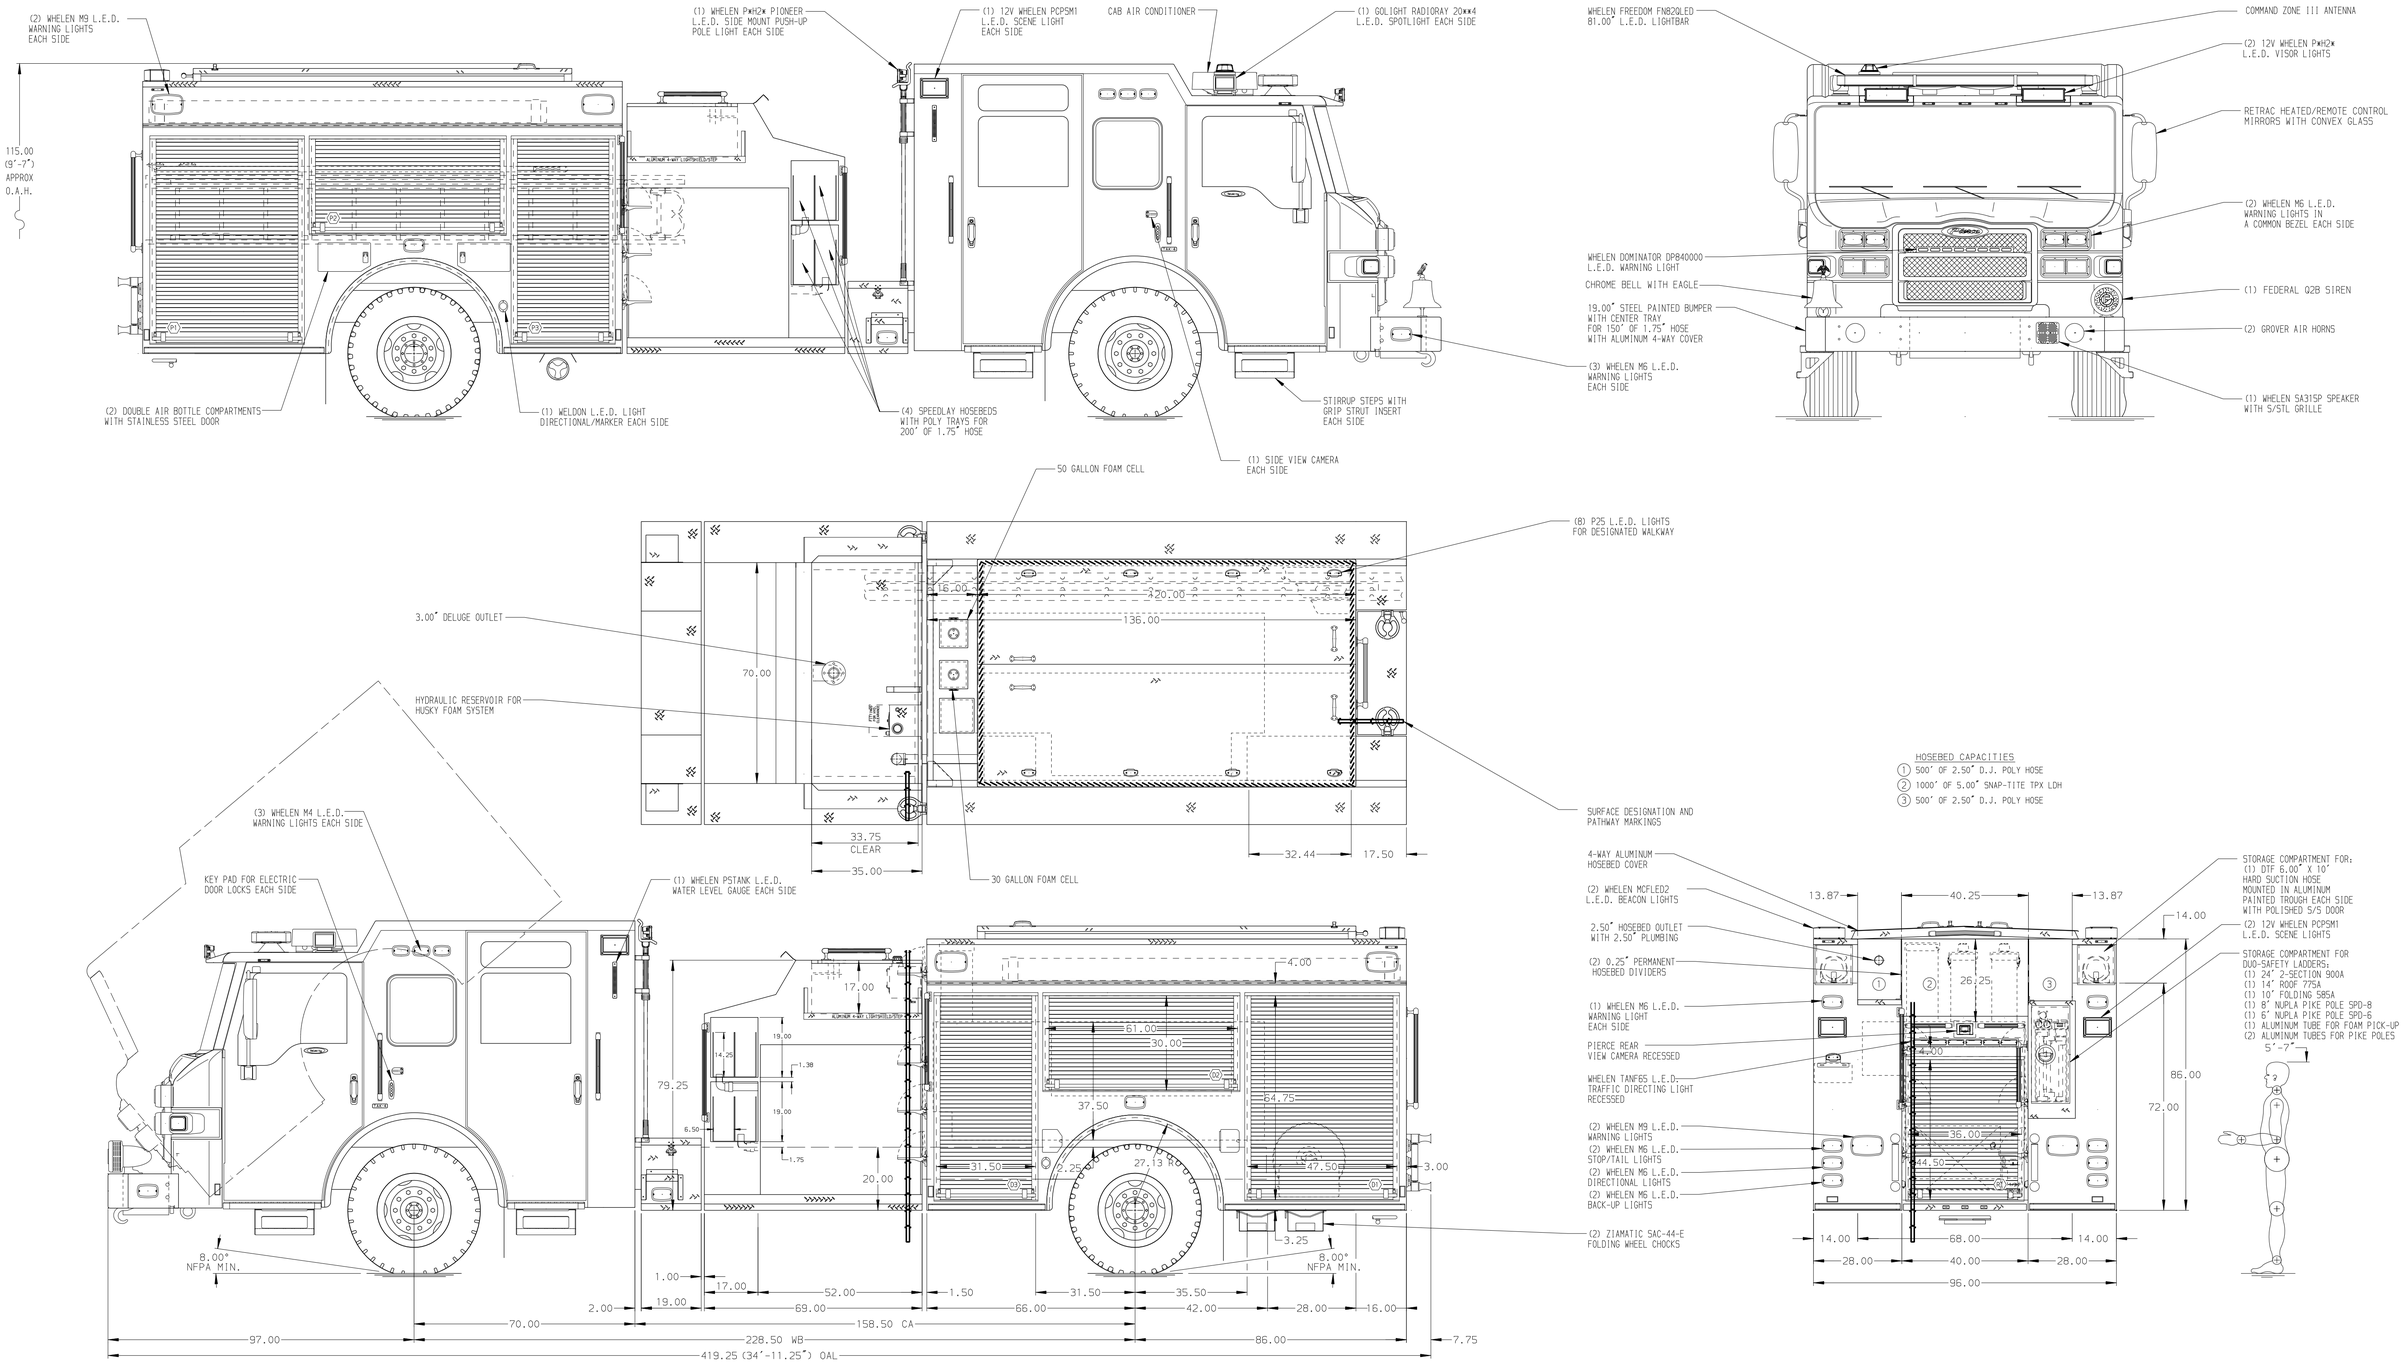

ALUMINUM BODY | MAXIMUM O.A.L. 432.00" | MAXIMUM O.A.H. 115.00" | SIDE ROLL AND FRONTAL IMPACT PROTECTION

Pierce MANUFACTURING INC.

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN CREW CAB SEAT RISER
2. BATTERY CHARGE INDICATOR LOCATED NEAR D.S. SEAT RISER WITH BRACKET
3. PULL STRAP ON DOOR IN COMPARTMENT D1, D2, D3, P1, P2, & P3
4. DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED D1, D2, D3, P1, P2, P3 & R1
5. ONE ADJUSTABLE SHELF IN COMPARTMENT P1, & P3
6. ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENT D1
7. TWO SLIDE-OUT TOOL BOARDS WITH PEGBOARD PATTERN IN COMPARTMENT D3
8. ONE ADJUSTABLE FULL HEIGHT/DEPTH SLIDE OUT TRAY IN COMPARTMENT D1 & R1
9. SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENT D2
10. CTECH DRAWER ASSEMBLY IN COMPARTMENT D3
11. ONE VERTICAL PARTITION IN COMPARTMENT D1
12. ALUMINUM PEGBOARD WITH TRACKS ON THE REAR WALL OF COMPARTMENT P2
13. HERCULES 200 CFM COMPRESSED AIR FOAM SYSTEM
14. AIR INLET/OUTLET W/ DISCONNECT FITTING LOCATED ON DS PUMP PANEL
15. SHORELINE RECEPTACLE LOCATED IN DRIVERS STEP WELL
16. HANNAY BOOSTER REEL MODEL EF34-23-24 LOCATED IN COMPARTMENT R1 WITH CAPACITY FOR 200' OF 1.00" BOOSTER HOSE
17. ONE FLOOR MOUNTED SLIDE OUT TRAY LOACATED IN COMPARTMENT P1, & P3 TWO IN COMPARTMENT D1
18. ONE SLIDE-OUT TOOLBOARD WITH PEGBOARD PATTERN MOUNTED INSIDE FLOOR MOUNT TRAY IN COMPARTMENT D1

REV	DATE	BY	CH
V	04MAY18	AMI	DTS
V	12APR18	AMI	CSH
V	02MAR18	CCA	CDU

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY

TITLE: 1500-D-500P W/50 & 30 GAL FOAM CELLS, 152" FDLER (4)SPEEDLAYS, DELUGE, LADDERS BESIDE TANK
FOR: PORT ARTHUR FIRE DEPARTMENT, PORT ARTHUR, TEXAS
DWG NO.: 32224AD

JOB NO.	32224
SCALE	1:24
DATE	
DRAWN BY	AMI
	20FEB18
CHECKED BY	CCA
	20FEB18
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 08-MAY-2018 11:00:10