

## PH852DBR 852nm Series


### High-Power Single-Frequency Laser Diode

#### Technology

- DBR Single-Frequency Laser Chip
- InGaAs QW Active Layer
- Epi designed for high reliability

#### Features

- Available in several package styles
- Pulsed operation for spectral stability at short pulse lengths
- High power for CW applications
- High Slope Efficiency

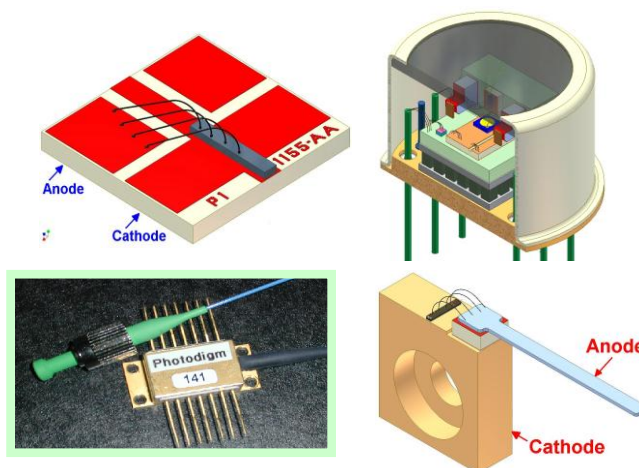

#### Description

The PH852DBR Series of high-power edge-emitting lasers are based on Photodigm's advanced single-frequency laser technology. It provides a diffraction limited, single lateral and longitudinal mode beam. Facets are passivated for high-power reliability. Devices used in atomic spectroscopy for cesium based applications.

#### Absolute Maximum Ratings

| Parameter  | Symbol     | Unit | Min  | Max   |
|--|------------|------|------|-------|
| Storage Temperature  | $T_{STG}$  | °C   | 0    | 80    |
| Operating Temperature  | $T_{OP}$   | °C   | 5.0  | 70    |
| CW Laser Forward Current, $T=T_{op}$                                 | $I_F$      | mA   | -    | 200** |
| Pulsed Laser Forward Current, $T=25^{\circ}C$ ,<br>PW=300 ns, DC=10% | $I_F$      | A    | -    | 0.5   |
| Laser Reverse Voltage  | $V_R$      | V    | -    | 0.0   |
| Photodiode Forward Current 1/2/                                      | $I_P$      | mA   | -    | 5.0   |
| Photodiode Reverse Voltage 1/2/                                      | $V_R$      | V    | -    | 20.0  |
| Photodiode Dark Current, $V_R=10V$ , LD $I_F=0$ , 1/2/               | $I_D$      | nA   | -    | 50    |
| TEC Current 1/2/   | $I_{TEC}$  | A    | -2.5 | 2.5   |
| TEC Voltage 1/2/   | $V_{TEC}$  | V    | -6.0 | 6.0   |
| Thermistor Current 1/2/  | $I_{THRM}$ | mA   | -    | 1.0   |
| Thermistor Voltage 1/2/  | $V_{THRM}$ | V    | -    | 10    |
| ESD (HBM)  | -          | V    | -    | 500   |
| External Back Reflection   | -          | dB   | -    | -14   |
| Lead Soldering Temperature, 10 sec. Max., 1/2/                       | -          | °C   | -    | 260   |
| Fiber Pull Force 1/  | -          | N    | -    | 5.0   |
| Fiber Bend Radius 1/   | -          | mm   | -    | 35    |

1/ Butterfly package 2/ TO-8 package\*\* Do not exceed drive current or operating power of supplied LIV

**CW Characteristics at T<sub>C</sub> = 25°C unless otherwise specified**

| Parameter   | Symbol                              | Unit       | Min                        | Typ    | Max    |
|---|-------------------------------------|------------|----------------------------|--------|--------|
| Center Wavelength   | $\lambda_c$                         | nm         | 850                        | 852    | 854    |
| Optical Output Power @ LIV current  | P <sub>o</sub>                      | mW         | See Power Options Call-out |        |        |
| Slope Efficiency, <u>1/</u>   | $\eta_d$                            | W/A        | 0.3                        | 0.36   |        |
| Slope Efficiency  | $\eta_d$                            | W/A        | 0.6                        | 0.72   | -      |
| Threshold Current   | I <sub>th</sub>                     | mA         | -                          | 40     | 50     |
| Laser Series Resistance   | R <sub>S</sub>                      | $\Omega$   | -                          | 2.5    | 3.5    |
| Laser Forward Voltage   | V <sub>F</sub>                      | V          | -                          | 2.0    | 2.5    |
| Thermistor Resistance @ 25°C, <u>1/2/</u>                                       | R <sub>T</sub>                      | K $\Omega$ | -                          | 10     | -      |
| Photodiode Dark Current, V <sub>R</sub> =10V, LD I <sub>F</sub> =0, <u>1/2/</u> | I <sub>D</sub>                      | nA         | -                          | -      | 50     |
| Laser Line Width  | $\Delta\nu$                         | MHz        | -                          | 0.5    | 1.0    |
| Beam Divergence @ FWHM  | $\theta_{  } \times \theta_{\perp}$ | °          | -                          | 6 X 32 | 8 X 34 |
| Side Mode Suppression Ratio   | SMSR                                | dB         | -30                        | -      | -      |
| Polarization Extinction Ratio, <u>1/</u>  | PER                                 | dB         | -16                        | -19    | -      |
| Laser Polarization  |                                     |            |                            | TE     |        |
| Mode Structure  |                                     |            | Fundamental Mode           |        |        |

1/ Butterfly package 2/ TO-8 package

**Handling Precautions**

These devices are sensitive to ESD. When handling the module, grounded work area and wrist strap must be used. Always store in an antistatic container with all leads shorted together.

**How To Order**

Part number example: PH852DBR080CM. Assign optical power from those shown below. Use a three-digit format for all power entries. Call factory for special performance selection and certification to certain atomic absorption lines. Butterfly package offered with 40mW operating power only and is not recommended for spectroscopy applications. See Photodigm's application note titled "Optical Feedback"


PH852DBR 

**Operating Power (mW)**

|     |     |
|-----|-----|
| 040 | 180 |
| 080 | 240 |
| 120 | 280 |

**Package Type**

- CS** Chip on Submount
- CM** 'C' Mount
- BF** Butterfly
- T8** TO-8



Photodigm, Inc. reserves the right to make changes in design, specifications and other information at any time, and without prior notice. The information contained within the product bulletin is believed to be accurate. However, no responsibility is assumed for possible inaccuracy or omission. Any information contained herein shall legally bind Photodigm, Inc. only if it is specifically incorporated in the terms and conditions of a sales agreement.