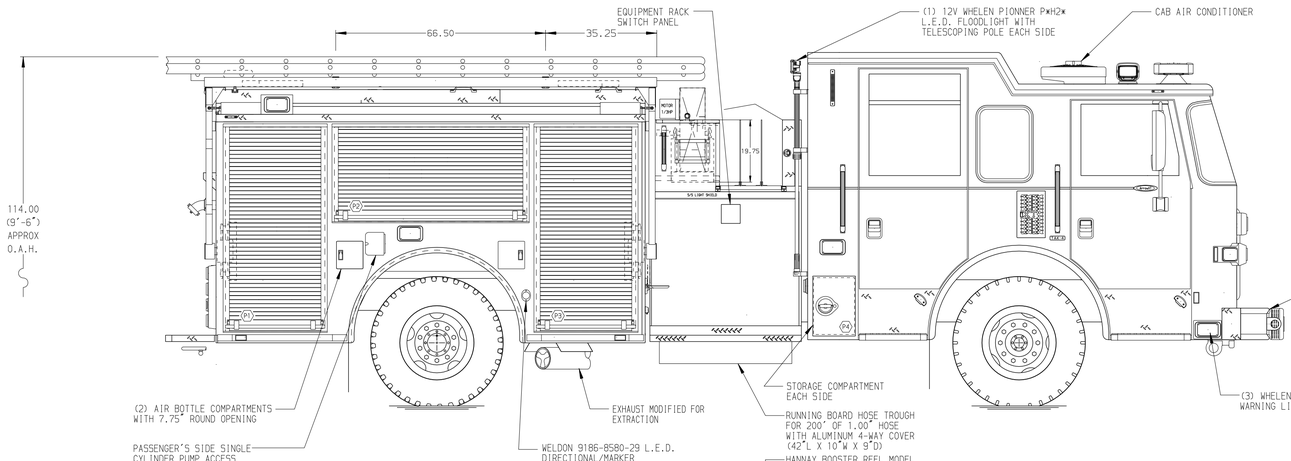

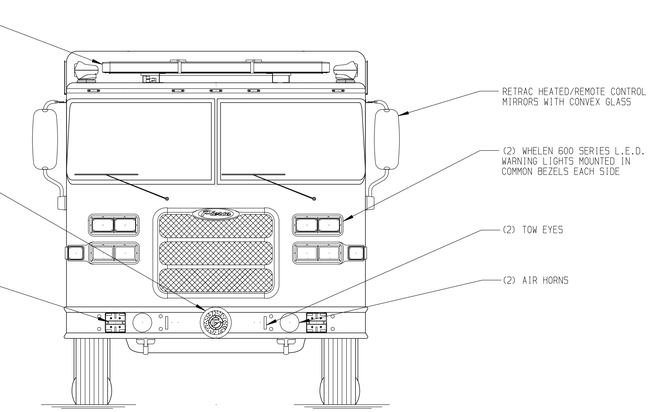

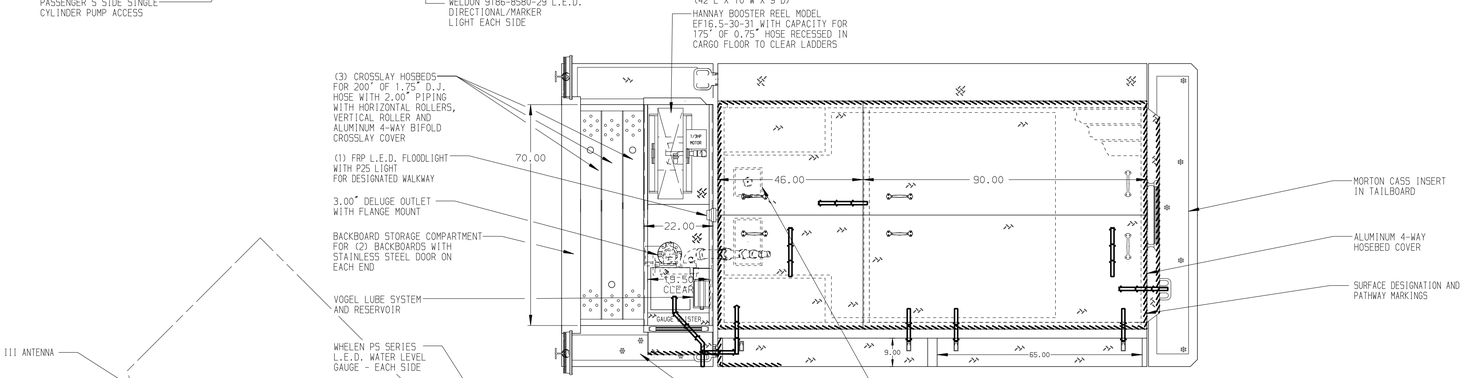

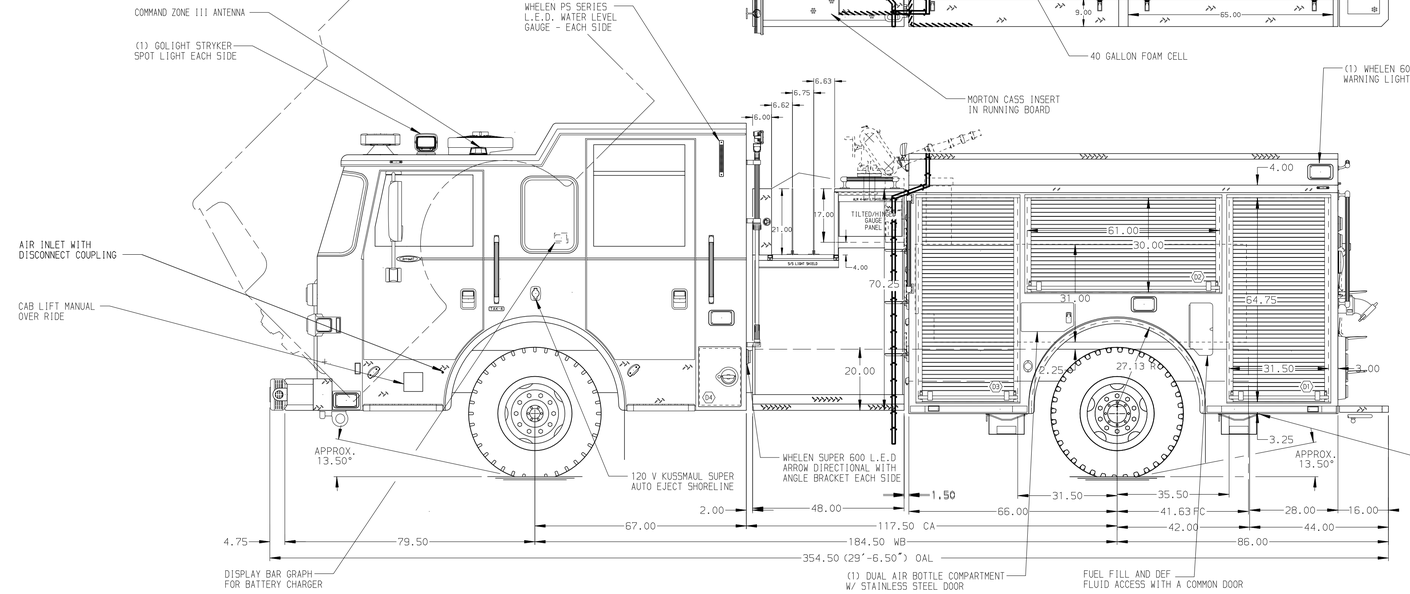

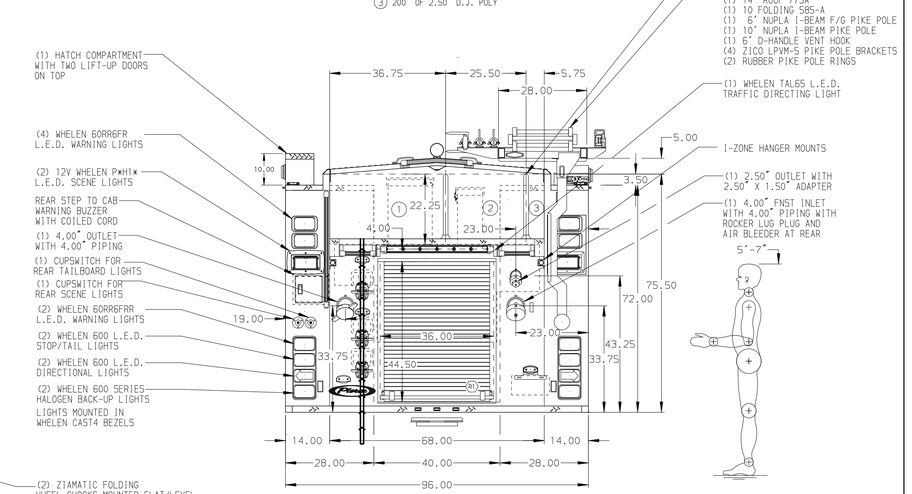

HOSEBED CAPACITIES
1. 900' OF 4.00" D.J. POLY
2. 750' OF 2.50" D.J. POLY
3. 200' OF 2.50" D.J. POLY

- (2) HOSEBED DIVIDERS
- DUO-SAFETY LADDERS,
  - (1) 24' 2 SECTION 900A
  - (1) 14' ROOF 775A
  - (1) 10 FOLDING 585-A
  - (1) 6' NUPLA I-BEAM F/G PIKE POLE
  - (1) 10' NUPLA I-BEAM PIKE POLE
  - (1) 6' D-HANDLE VENT HOOK
  - (4) ZICO LPVM-S PIKE POLE BRACKETS
  - (2) RUBBER PIKE POLE RINGS
- (1) WHELEN TAL65 L.E.D. TRAFFIC DIRECTING LIGHT
- I-ZONE HANGER MOUNTS
- (1) 2.50" OUTLET WITH 2.50" X 1.50" ADAPTER
- (1) 4.00" FNST INLET WITH 4.00" PIPING WITH ROCKER LUG PLUG AND AIR BLEEDER AT REAR

GALVANNEAL BODY

MAXIMUM O.A.L. 372.00"

MAXIMUM O.A.H. 114.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. MOUNTING BASE FOR ANTENNA LOCATED PER SHOP ORDER
2. S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
3. KEYED LOCK FOR LATCH FOR ALL COMPARTMENTS AND CAB DOORS
4. TURTLE TILE MATTING ON FLOOR IN COMPARTMENTS D1, D2, P1, P2, & P3
5. TWO ADJUSTABLE SHELVES(FULL DEPTH/WIDTH) IN COMPARTMENTS D1, P1, & P3, ONE SHELF EACH IN COMPARTMENTS D3, P2 & R1
6. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
7. FOAMPRO 2002 SINGLE AGENT FOAM SYSTEM
8. TURTLE TILE MATTING ON ALL SHELVES
9. S/STL PROTECTIVE GUARD ON ALL ROLL-UP DOORS
10. ONE SLIDE-OUT FLOOR MOUNTED TRAY WITH SIDE SLIDES IN COMPARTMENT R1
11. BOLT-IN PARTITION BETWEEN COMPARTMENTS D1/R1 & P1/R1
12. RESPOND READY STORAGE CABINET LOCATED IN COMPARTMENT D3
13. BRUSHED S/STL SCUFFPLATES IPO S/STL LOCATED ON CAB DOORS
14. MIC & SPEAKER COMPARTMENT LOCATED ON DS PUMP PANEL
15. BATTERY CHARGER/COMPRESSOR LOCATED IN COMPARTMENT D3
16. ONE AIR OUTLET WITH SHUT OFF VALVE LOCATED ON DS & PS PUMP PANEL
17. S/STL CORNER TRIM ON P.S. FRONT COMPT BULKHEAD TO BE OVERLAPPING 4-WAY ON FRONT OF BULKHEAD

REV	DATE	BY	CH
V	02MAY18	AMI	SHA

CHASSIS DATA
MAKE: PIERCE
MODEL: ARROW XT

TITLE: 1500-D-500 POLY W/40 GAL FOAM CELL, 136" BODY, HB COVER, DS HATCH, ABC'S, 2000 RACK, (3)X-LAYS
FOR: SAN DIEGO FIRE DEPARTMENT, SAN DIEGO, CALIFORNIA
DWG NO.: 32279AD

Pierce MANUFACTURING INC.

JOB NO.	32279 01-04
SCALE	1:24
DATE	
DRAWN BY	LST 19MAR18
CHECKED BY	SMA 19MAR18
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 03-MAY-2018 12:44:45