

Pumper, PUC

BODY

Pumper, PUC, Aluminum

CHASSIS

Arrow XT Chassis, PUC

CHASSIS

AXLE, FRONT, CUSTOM

22,800 Lb TAK-4 Axle

AXLE, REAR

31,000 Lb Dana Axle

ENGINE

500 HP Cummins ISX12 Engine

TRANSMISSION

Allison 5th Gen, 4000 EVS P

BUMPER

19" Extended Painted Steel

CAB

6710 Arrow XT Cab, PUC

BODY

WATER TANK

750 Gallon Poly Water Tank

COMPT, PUMPER, REAR

40.50" FF RollUp Rear Compt w/Tailboard, PUC

COMPT, PUMPER, DRIVER SIDE

189" RollUp/Lap Full Height & Depth Front & Rear, PUC

COMPT, PUMPER PASS. SIDE

189" Lap Full Height & Depth Front & Rear, PUC

FIRE SUPPRESSION

PUMPHOUSE

Control Zone, PUC

PUMP

1500 GPM Pierce PUC

CROSSLAYS, 1.50"

(2) 1.50", Poly Trays, 200"

CROSSLAYS, 2.50"

(1) 2.50", Poly Tray, 200"

GENERATOR


Generator Not Required

Foam System

Husky 3 Single Agent Foam System

Foam Cell

20 Gallon Foam Cell, Not Reduced Water, PUC

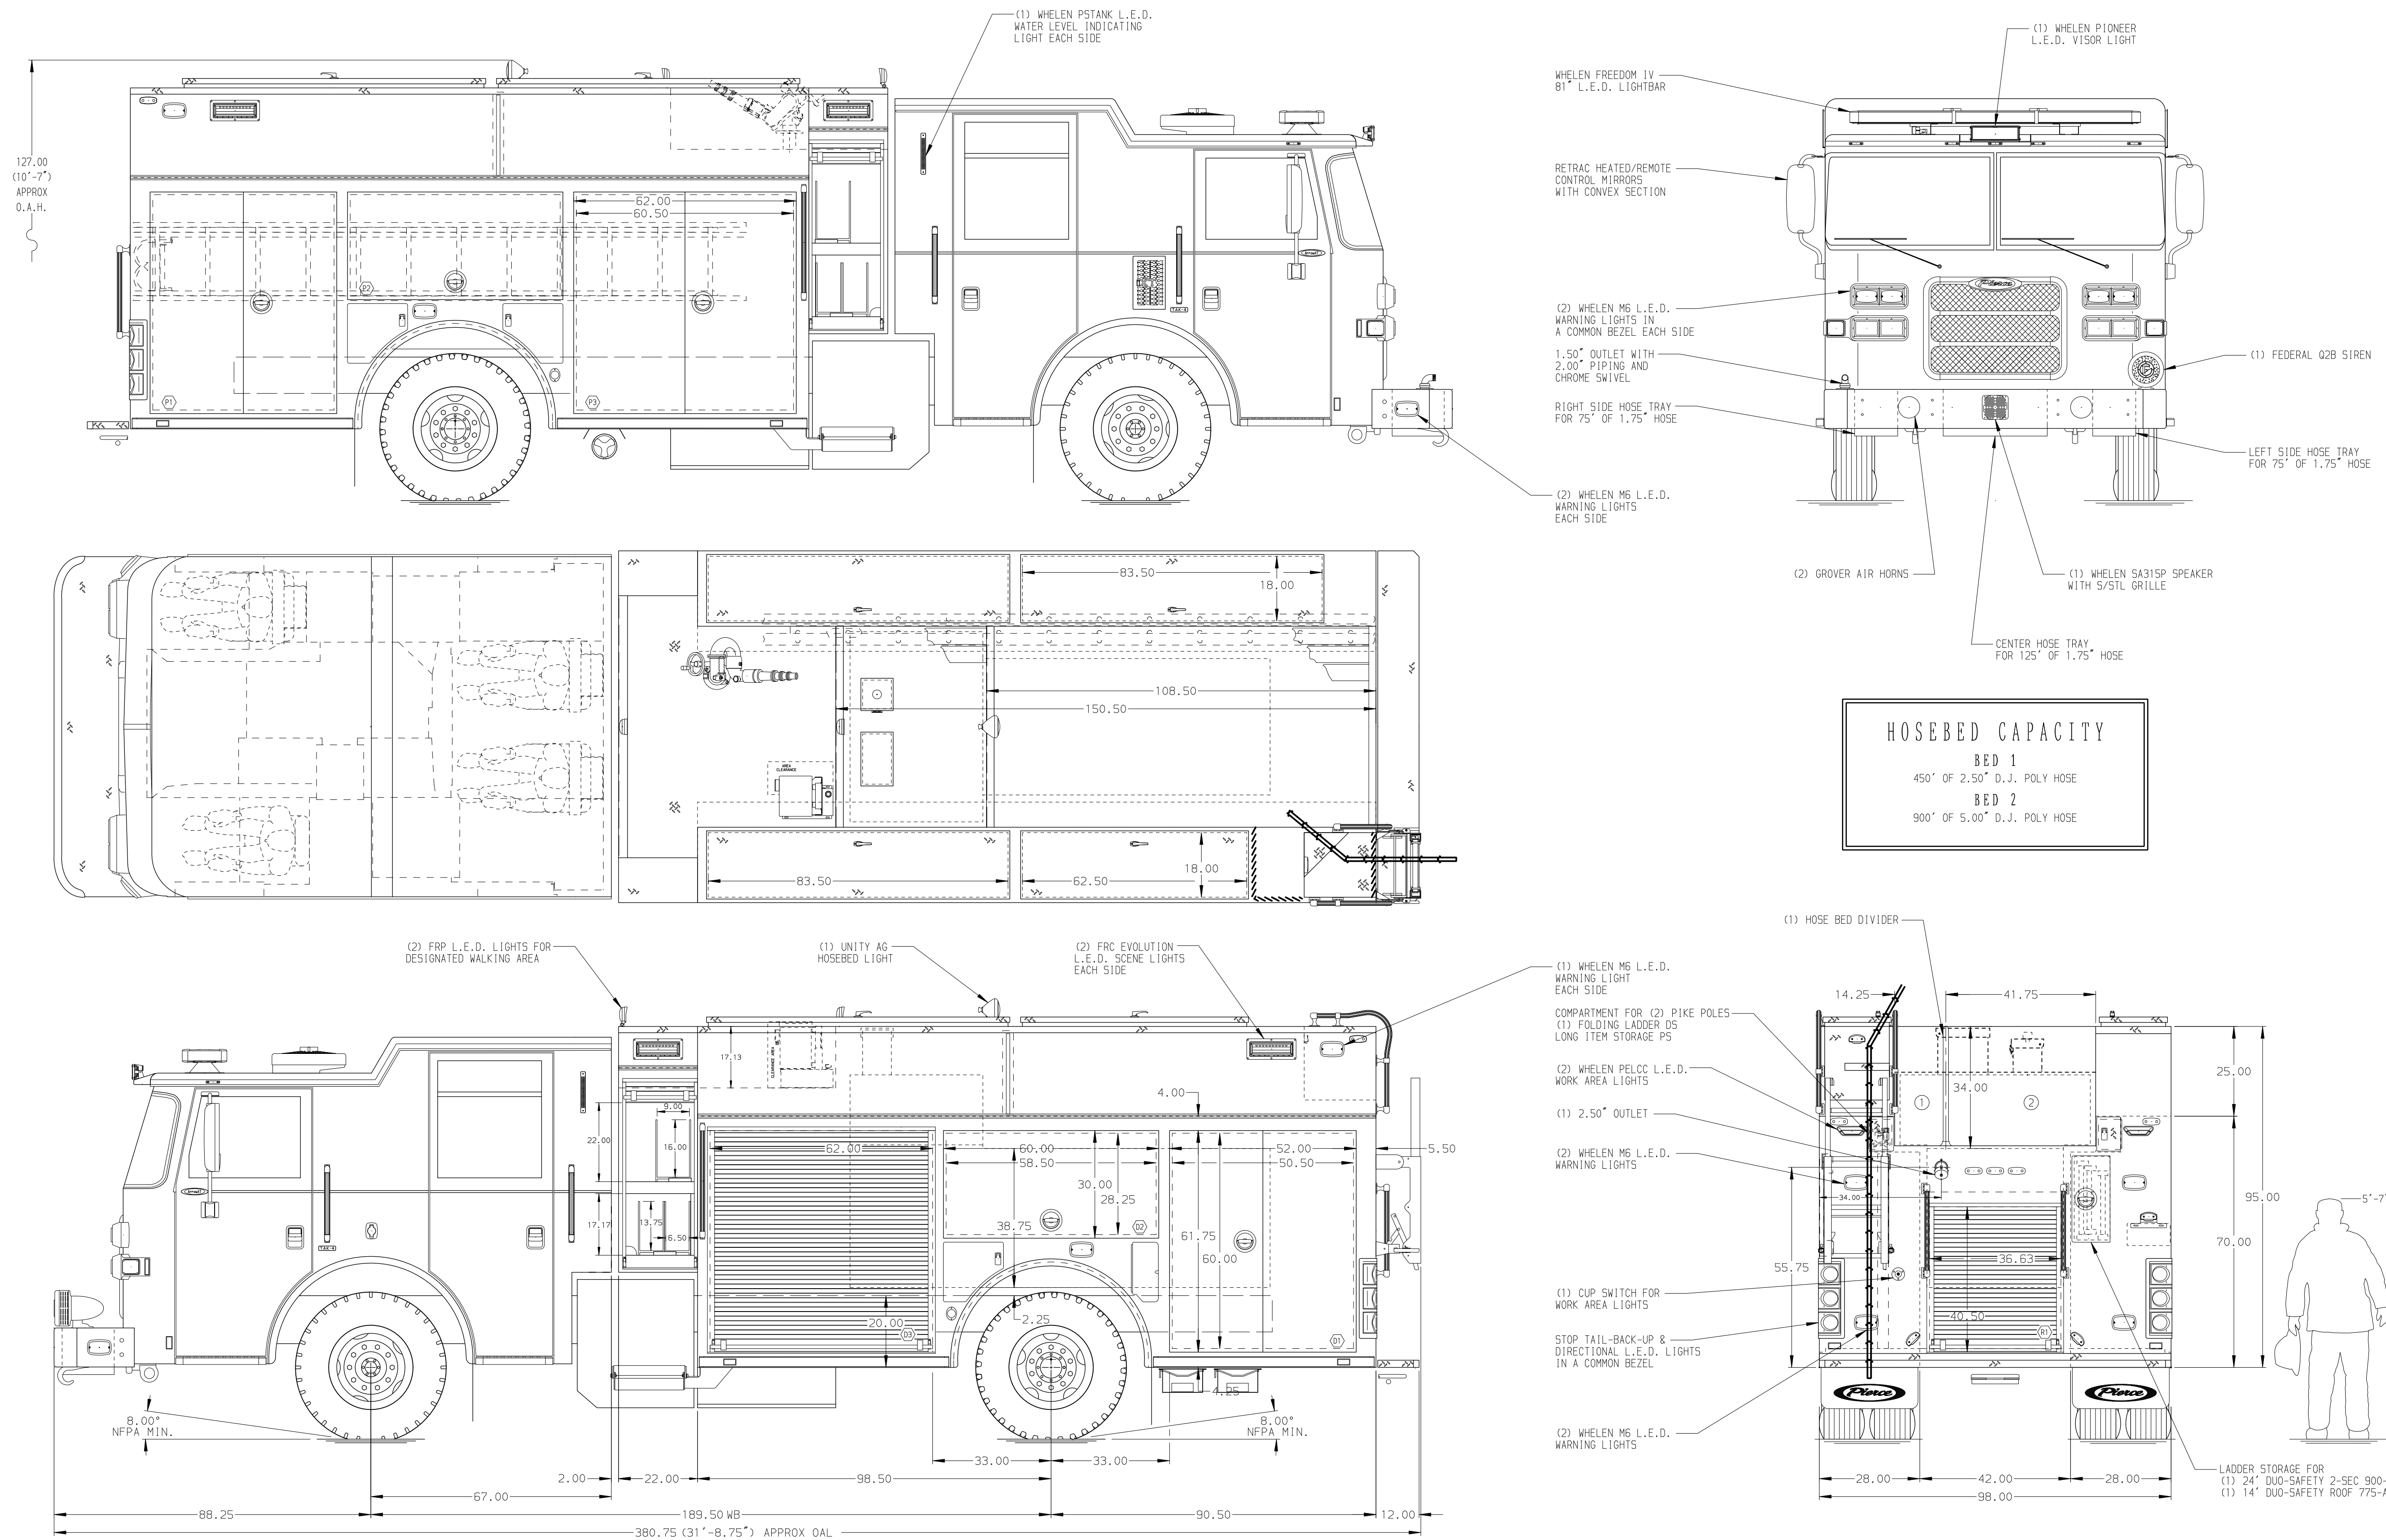

HOSEBED CAPACITY	
BED 1	450' OF 2.50" D.J. POLY HOSE
BED 2	900' OF 5.00" D.J. POLY HOSE

CUSTOMER APPROVAL

APPROVED BY: _____
DATE: _____



JOB NO.	32471-01-03
SCALE	1:24
DATE	
DRAWN BY	COL
CHECKED BY	KBO
SHEET SIZE	D
SHEET NO.	1 OF 1

TITLE	Pierce PUC Pumper Approval Drawing
MAKE	Pocatiello Fire Department
MODEL	
DWG NO.	32471AD
REV	
DATE	
BY	
CH	
ARROW XT	

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. AUTOMATIC TIRE CHAINS
2. SHORELINE RECEPTACLE WITH KUSSMAIL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET/OUTLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
6. EIGHT ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
7. SIX FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
8. KUSSMAIL INVERTER LOCATED PER SHOP ORDER
9. ONE 120V DUPLEX RECEPTACLE LOCATED PER SHOP ORDER
10. ONE 120V 4-PLACE RECEPTACLE LOCATED PER SHOP ORDER