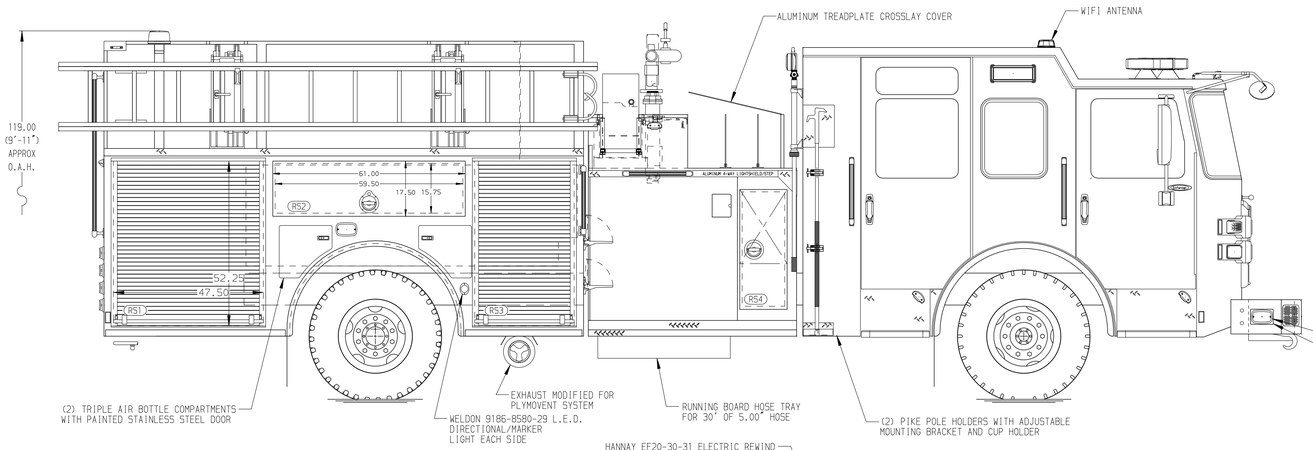

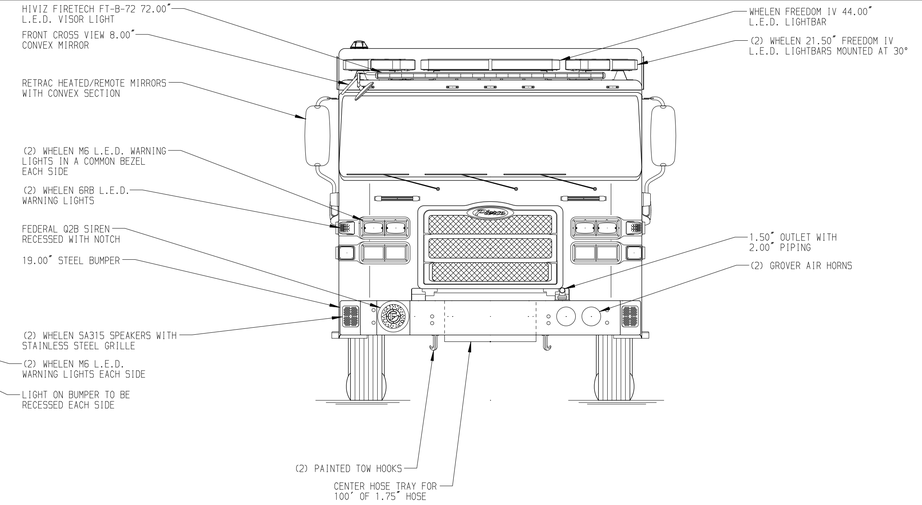

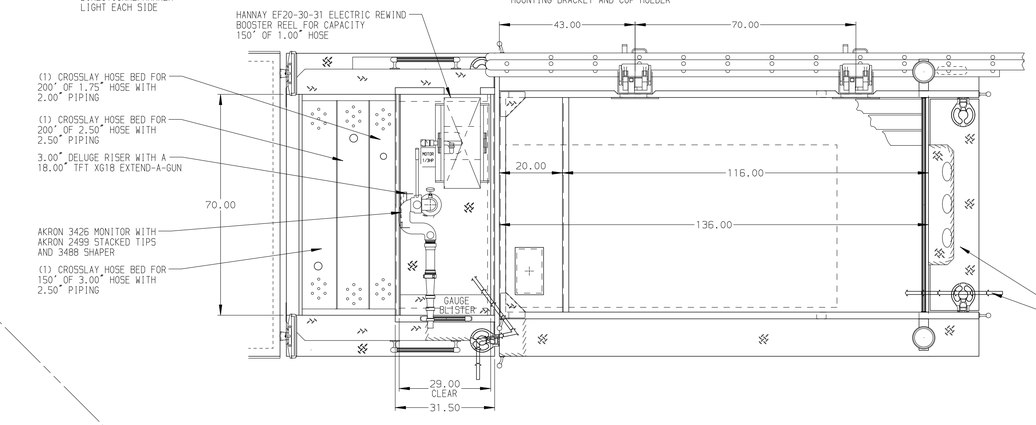

HOSEBED CAPACITIES

1. 200' OF 2.50" HOSE (SINGLE STACK)
2. 200' OF 2.50" HOSE (EDGE STACK)
   300' OF 1.75" HOSE (EDGE STACK)
3. 1000' OF 3.00" HOSE
4. 1000' OF 3.00" HOSE
5. 200' OF 1.75" HOSE
6. 200' OF 1.75" HOSE

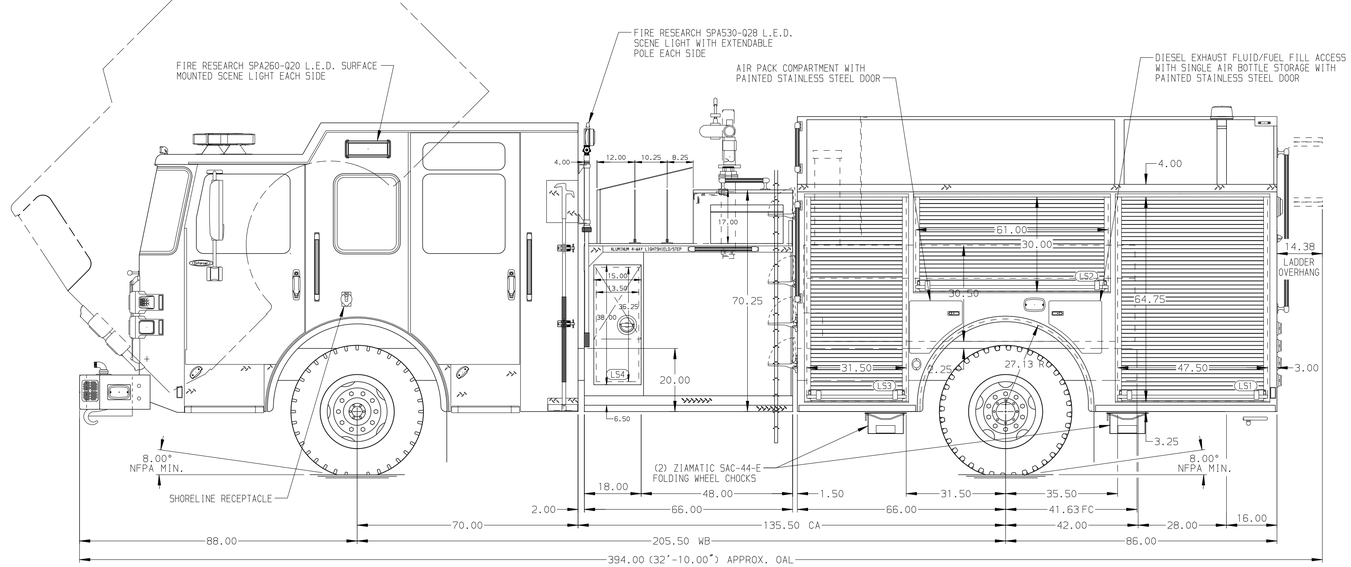

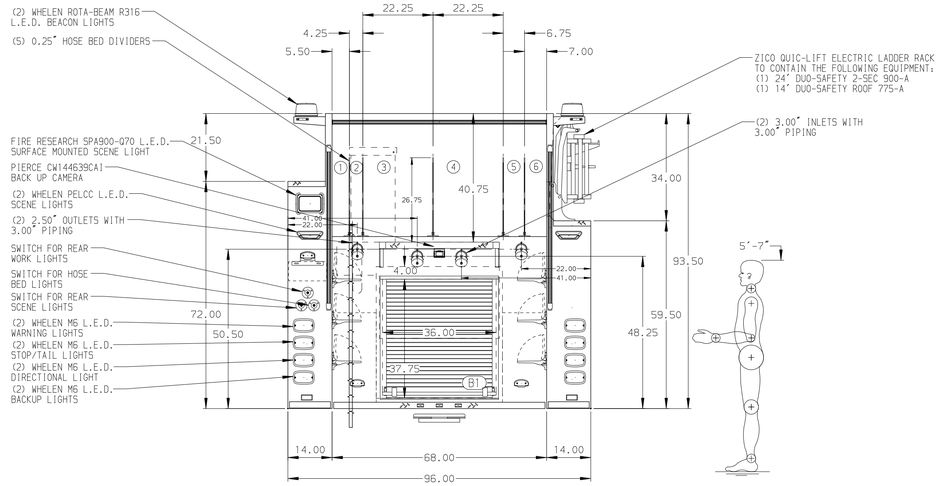

ALUMINUM BODY | SIDE ROLL PROTECTION | MAXIMUM O.A.H. 119.00" | MAXIMUM O.A.L. 394.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED AT DRIVER SIDE PUMP PANEL
2. ALUMINUM TREADPLATE ON RAISED CAB ROOF
3. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
4. BATTERY CHARGER INDICATOR DISPLAY THROUGH WINDOW BEHIND DRIVER SEAT
5. THREE P25 L.E.D. WALKING SURFACE LIGHTS LOCATED IN THE CARGO AREA
6. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF WITH SIDES IN COMPARTMENT-LS1,LS3,RS1,RS3,B1
7. ONE ADJUSTABLE FULL WIDTH SHELF WITH SIDES IN COMPARTMENT-LS4/RS4
8. ONE ADJUSTABLE SLIDE-OUT TRAY WITH SIDES IN COMPARTMENT-LS3
9. ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH SIDES IN COMPARTMENT-B1
10. ALUMINUM TREADPLATE ON THE FLOOR IN COMPARTMENT-LS1,LS2,LS3,RS1,RS2,RS3
11. PARTITION BETWEEN COMPARTMENTS RS1/B1
12. PEGBOARD WITH TRACKS ON REAR WALL IN COMPARTMENT-LS1,LS2,LS3,RS1,RS3

REV	DATE	BY	CH
E	06NOV18	BST	DTS
D	29OCT18	BST	DTS
C	27SEP18	BST	DTS
B	16JUL18	BST	AJA
A	13JUL18	AMI	AJA

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: 1500-D-500P,152" PUMPER BODY,BOOSTER REEL
ZICO LADDER RACK,(3) CROSSLAYS

FOR: BOROUGH OF BERGENFIELD
BERGENFIELD, NJ

DWG NO. 32729AD

JOB NO.	32729
SCALE	DATE
1:24	
DRAWN BY	DATE
BST	28JUN18
CHECKED BY	DATE
AJA	28JUN18
SHEET SIZE	SHEET NO.
D	1 OF 1

View File Created 07-NOV-2018 10:25:53