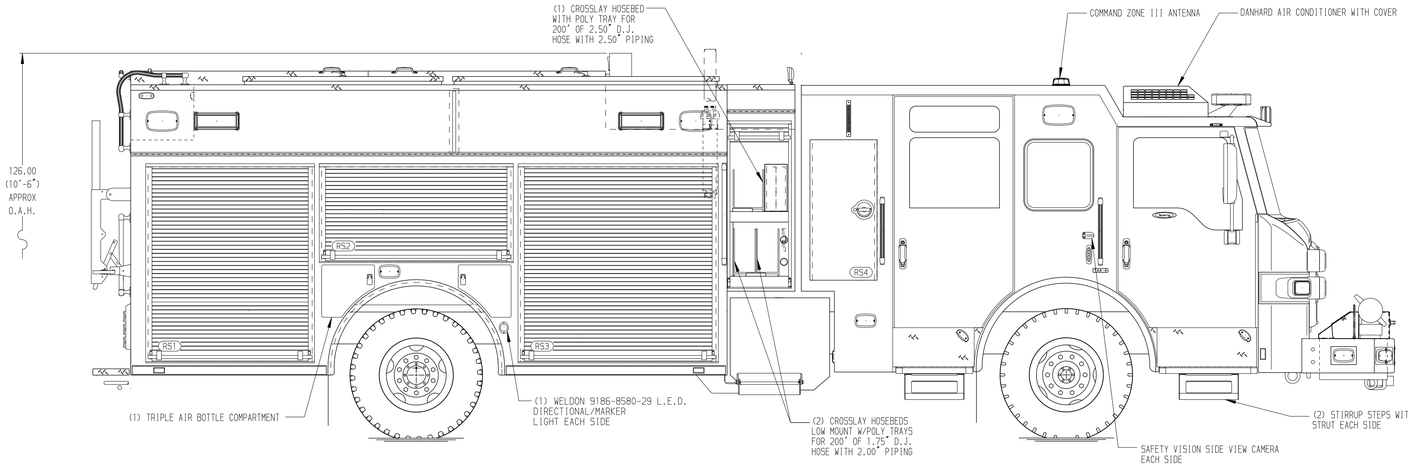

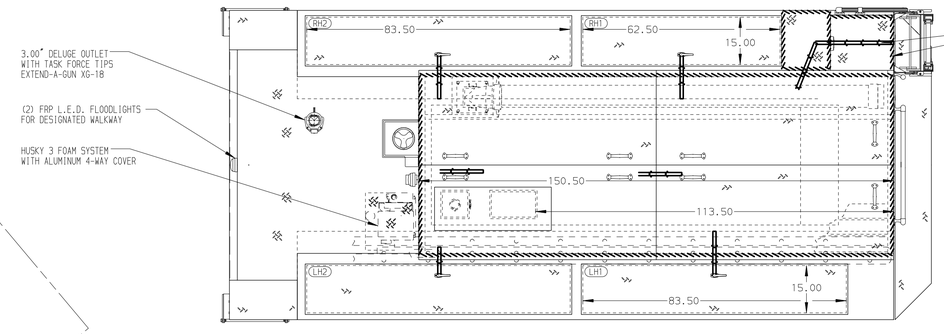

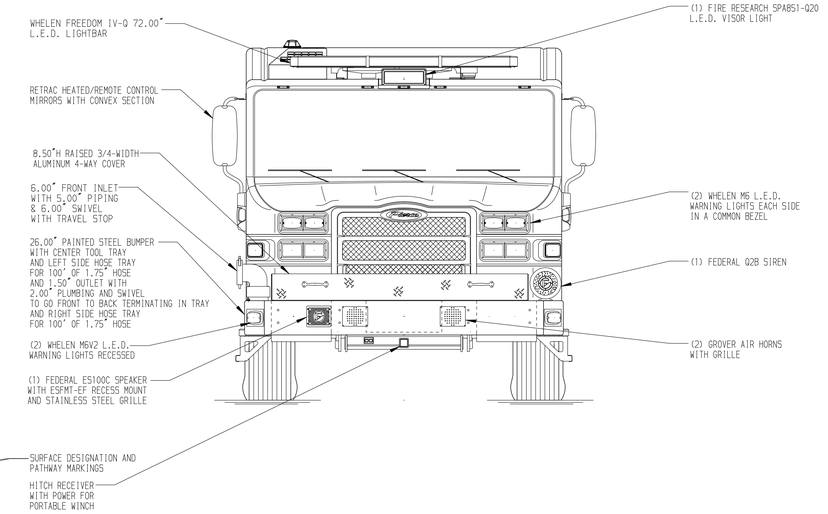

HOSEBED CAPACITIES
1. 400' OF 2.50" D.J. POLY HOSE
2. 1100' OF 5.00" D.J. POLY HOSE

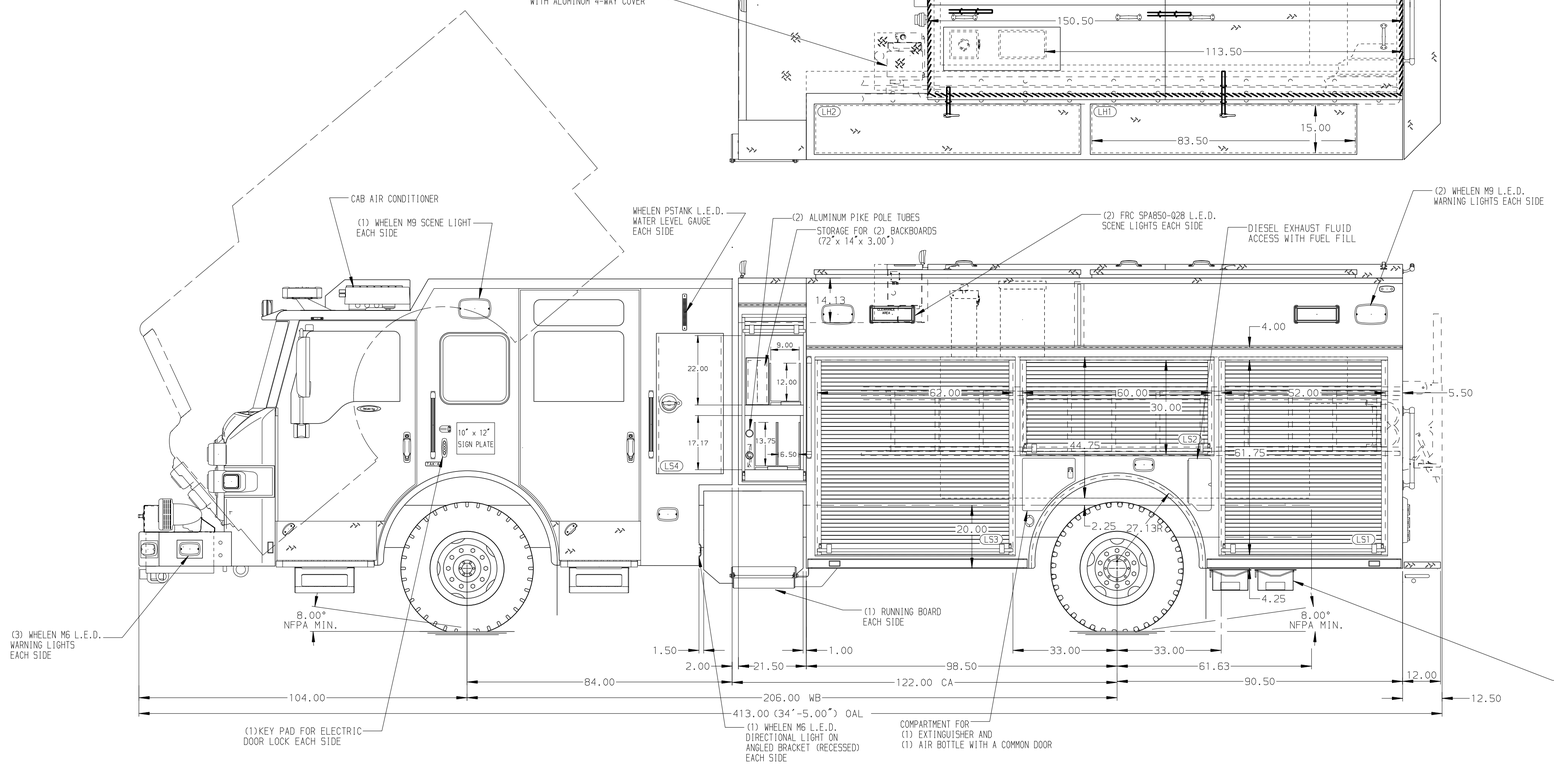

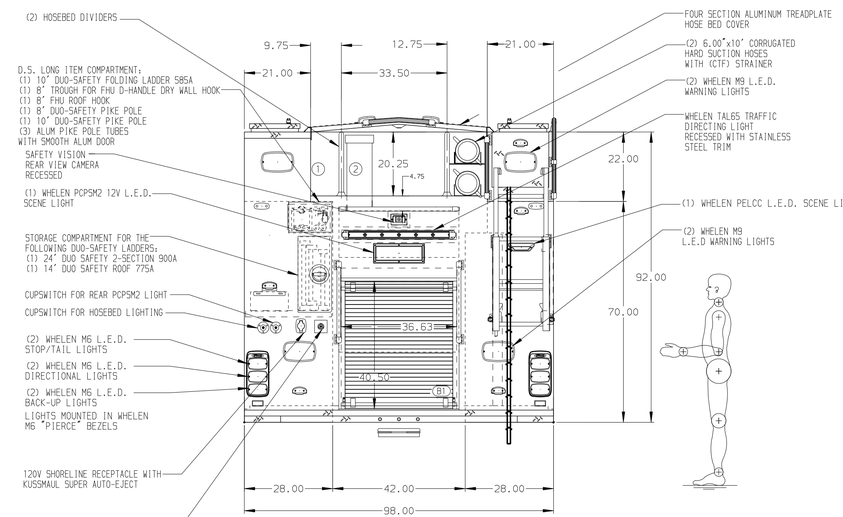

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN LS3
2. BATTERY CHARGE INDICATOR LOCATED NEAR D.S. SEAT RISER WITH BRACKET
3. SUB-FEED CIRCUIT BREAKER PANEL NEAR OTHER BREAKER BOX
4. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
5. TWO FULL WIDTH/ DEPTH ADJUSTABLE SHELVES IN RS3
6. ONE 750LB FLOOR MOUNTED SLIDE-OUT TRAY IN LS1 AND RS1
7. ONE ADJUSTABLE SLIDE-OUT TRAY IN B1
8. ONE ADJUSTABLE TILT/SLIDE-OUT FULL WIDTH/DEPTH TRAY IN RS2
9. TWO SLIDE-OUT ALUMINUM TOOLBOARDS WITH PEGBOARD IN RS3
10. ONE 500LB FLOOR MOUNTED SLIDE-OUT TRAY IN B1 AND RS3
11. ONE SWING-OUT ALUMINUM TOOL BOARD IN LS1 AND LS2
12. TWO DRAWER CTECH DRAWER ASSEMBLY IN LS3
13. ALUMINUM PEGBOARD WITH TRACKS ON THE REAR WALL OF LS2 AND RS1
14. PAC TRAC INSTALLED IN LS3
15. MOUNTING BRACKET FOR HYDRAULIC CUTTER TOOL IN CENTER TOOL TRAY
16. AIR OUTLET WITH SHUT OFF VALVE ON D.S. LOWER PUMP PANEL IN LS3
17. VERTICAL PARTITION IN RS3
18. AIR BAG RACK FOR 3 AIR BAGS IN RS3
19. PERMANENTLY MOUNTED 3/16" INVERTED SHELF IN LS3
20. ONE HORIZONTAL PARTITION IN LS3
21. ALUMINUM PEGBOARD ON THE EACH SIDE WALL OF RS1
22. (1) 120V DUPLEX RECEPTACLE ON THE REAR CENTER BACK WALL OF RS4
23. PARTITION BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1

REV	DATE	BY	CH
7	08MAR19	LST	JJR
6	05DEC18	LST	JJR
5	25OCT18	LST	JJR

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY

Pierce MANUFACTURING INC.

TITLE: 1500-D-775P 750 GAL OF WATER W/ 25 GAL FOAM CELL 189" PUC RESCUE, (3) X-LAYS, LADDERS THRU BODY
FOR: BROWARD COUNTY SHERIFF'S OFFICE FORT LAUDERDALE, FLORIDA
DWG NO.: 32867AD

JOB NO.	32867
SCALE	1:24
DATE	
DRAWN BY	LST
DATE	07AUG18
CHECKED BY	SMA
DATE	08AUG18
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 11-MAR-2019 12:01:22