## Pumper, PUC BODY

Pumper, PUC, Aluminum

CHASSIS

Enforcer Chassis, PUC

## CHASSIS

AXLE, FRONT, CUSTOM 19,500 lb TAK-4 Axle

AXLE, REAR

27,000 lb Meritor Axle

ENGINE

450 HP Cummins L9 Engine

## TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

19" Extended Stainless Steel

CAB

7010 Enforcer Cab, PUC

B O D Y

WATER TANK 750 Gallon Poly Water Tank

COMPT, PUMPER, REAR

33.50" FF Rollup Rear Compt w/Tailboard, PUC

COMPT, PUMPER, LEFT SIDE 189" Rollup Full Height & Depth Front & Rear, PUC

COMPT, PUMPER, RIGHT SIDE 189" Rollup Full Height & Depth Front & Rear, PUC

## FIRE SUPPRESSION

PUMPHOUSE

Control Zone, PUC

PUMP

1500 GPM Pierce PUC

CROSSLAYS, 1.50" (2) 1.50", Poly Trays, 200'

CROSSLAYS, 2.50" (1) 2.50", Poly Tray, Special Capacity

GENERATOR

Generator Not Required

Foam System Foam System Not Required

Foam Cell

Foam Cell Not Required

DIMENSIONS SHOWN ARE APPROXIMATE


AS MAY OCCUR OR BE NECESSARY IN


MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY SHORELINE RECEPTACLE WITH BLUE SEA SURE EJECT LOCATED ON DRIVER SIDE OF THE CAB

3. AIR INLET/OUTLET WITH SHUT OFF VALVE ON THE DRIVER SIDE PUMP PANEL 4. BATTERY CHARGER LOCATED BEHIND DRIVERS SEAT AND ARE SUBJECT TO MINOR DEVIATIONS 5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER FOUR ADJUSTABLE SHELVES LOCATED PER SHOP ORDER TWO FLOOR MOUNTED SLIDE-OUT TRAYS WITH SIDE SLIDES LOCATED PER SHOP ORDER 8. ONE TILTING/SLIDE-OUT TRAY LOCATED PER SHOP ORDER 9. TWO SWING-OUT TOOLBOARDS LOCATED PER SHOP ORDER

10. CTECH THREE DRAWER INSERT LOCATED PER SHOP ORDER



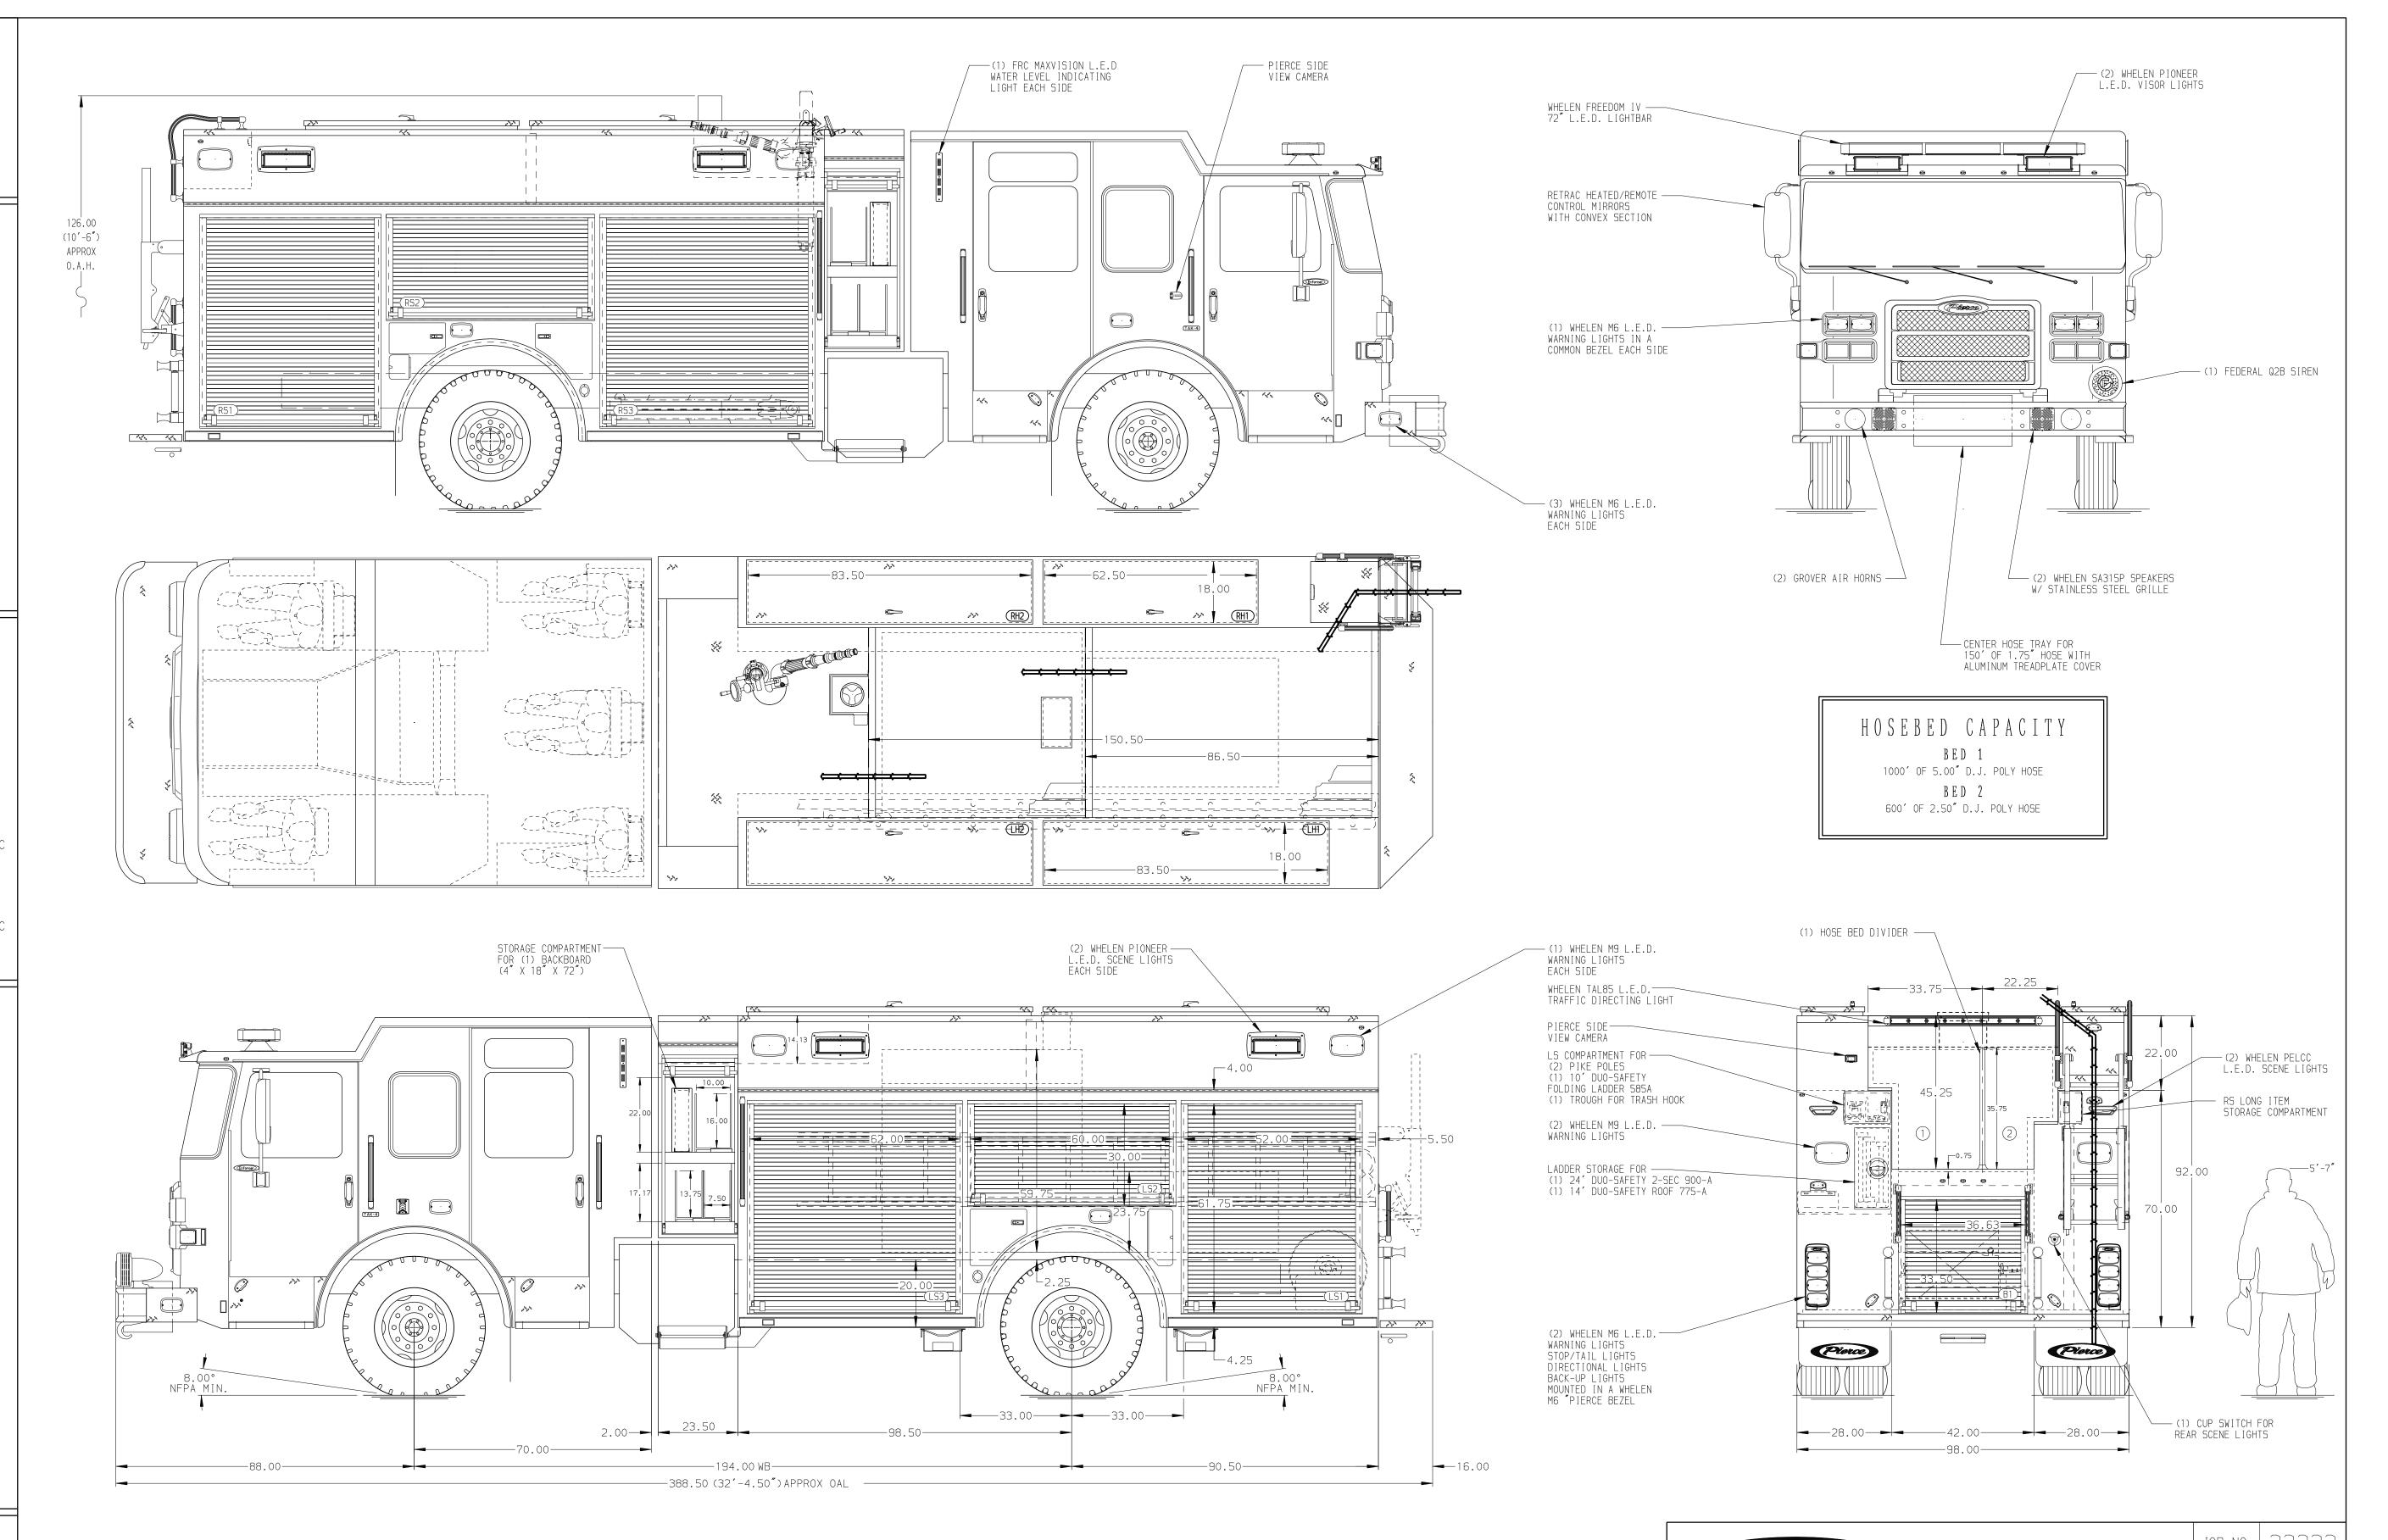

33333 JOB NO. MANUFACTURING INC. SCALE DATE 1:24 DRAWN BY Pierce PUC Pumper Approval Drawing CHASSIS 15JAN18 COL DATA MAKE CHECKED BY Tyler Fire Department 17JAN19 KB0 PIERCE B 15MAR19 COL KBO MODEL SHEET SIZE SHEET NO. A 30JAN19 COL EFA DWG 3333AD REV DATE BY CH

View File Created 28-MAR-2019 08:39:53

CONSTRUCTION.