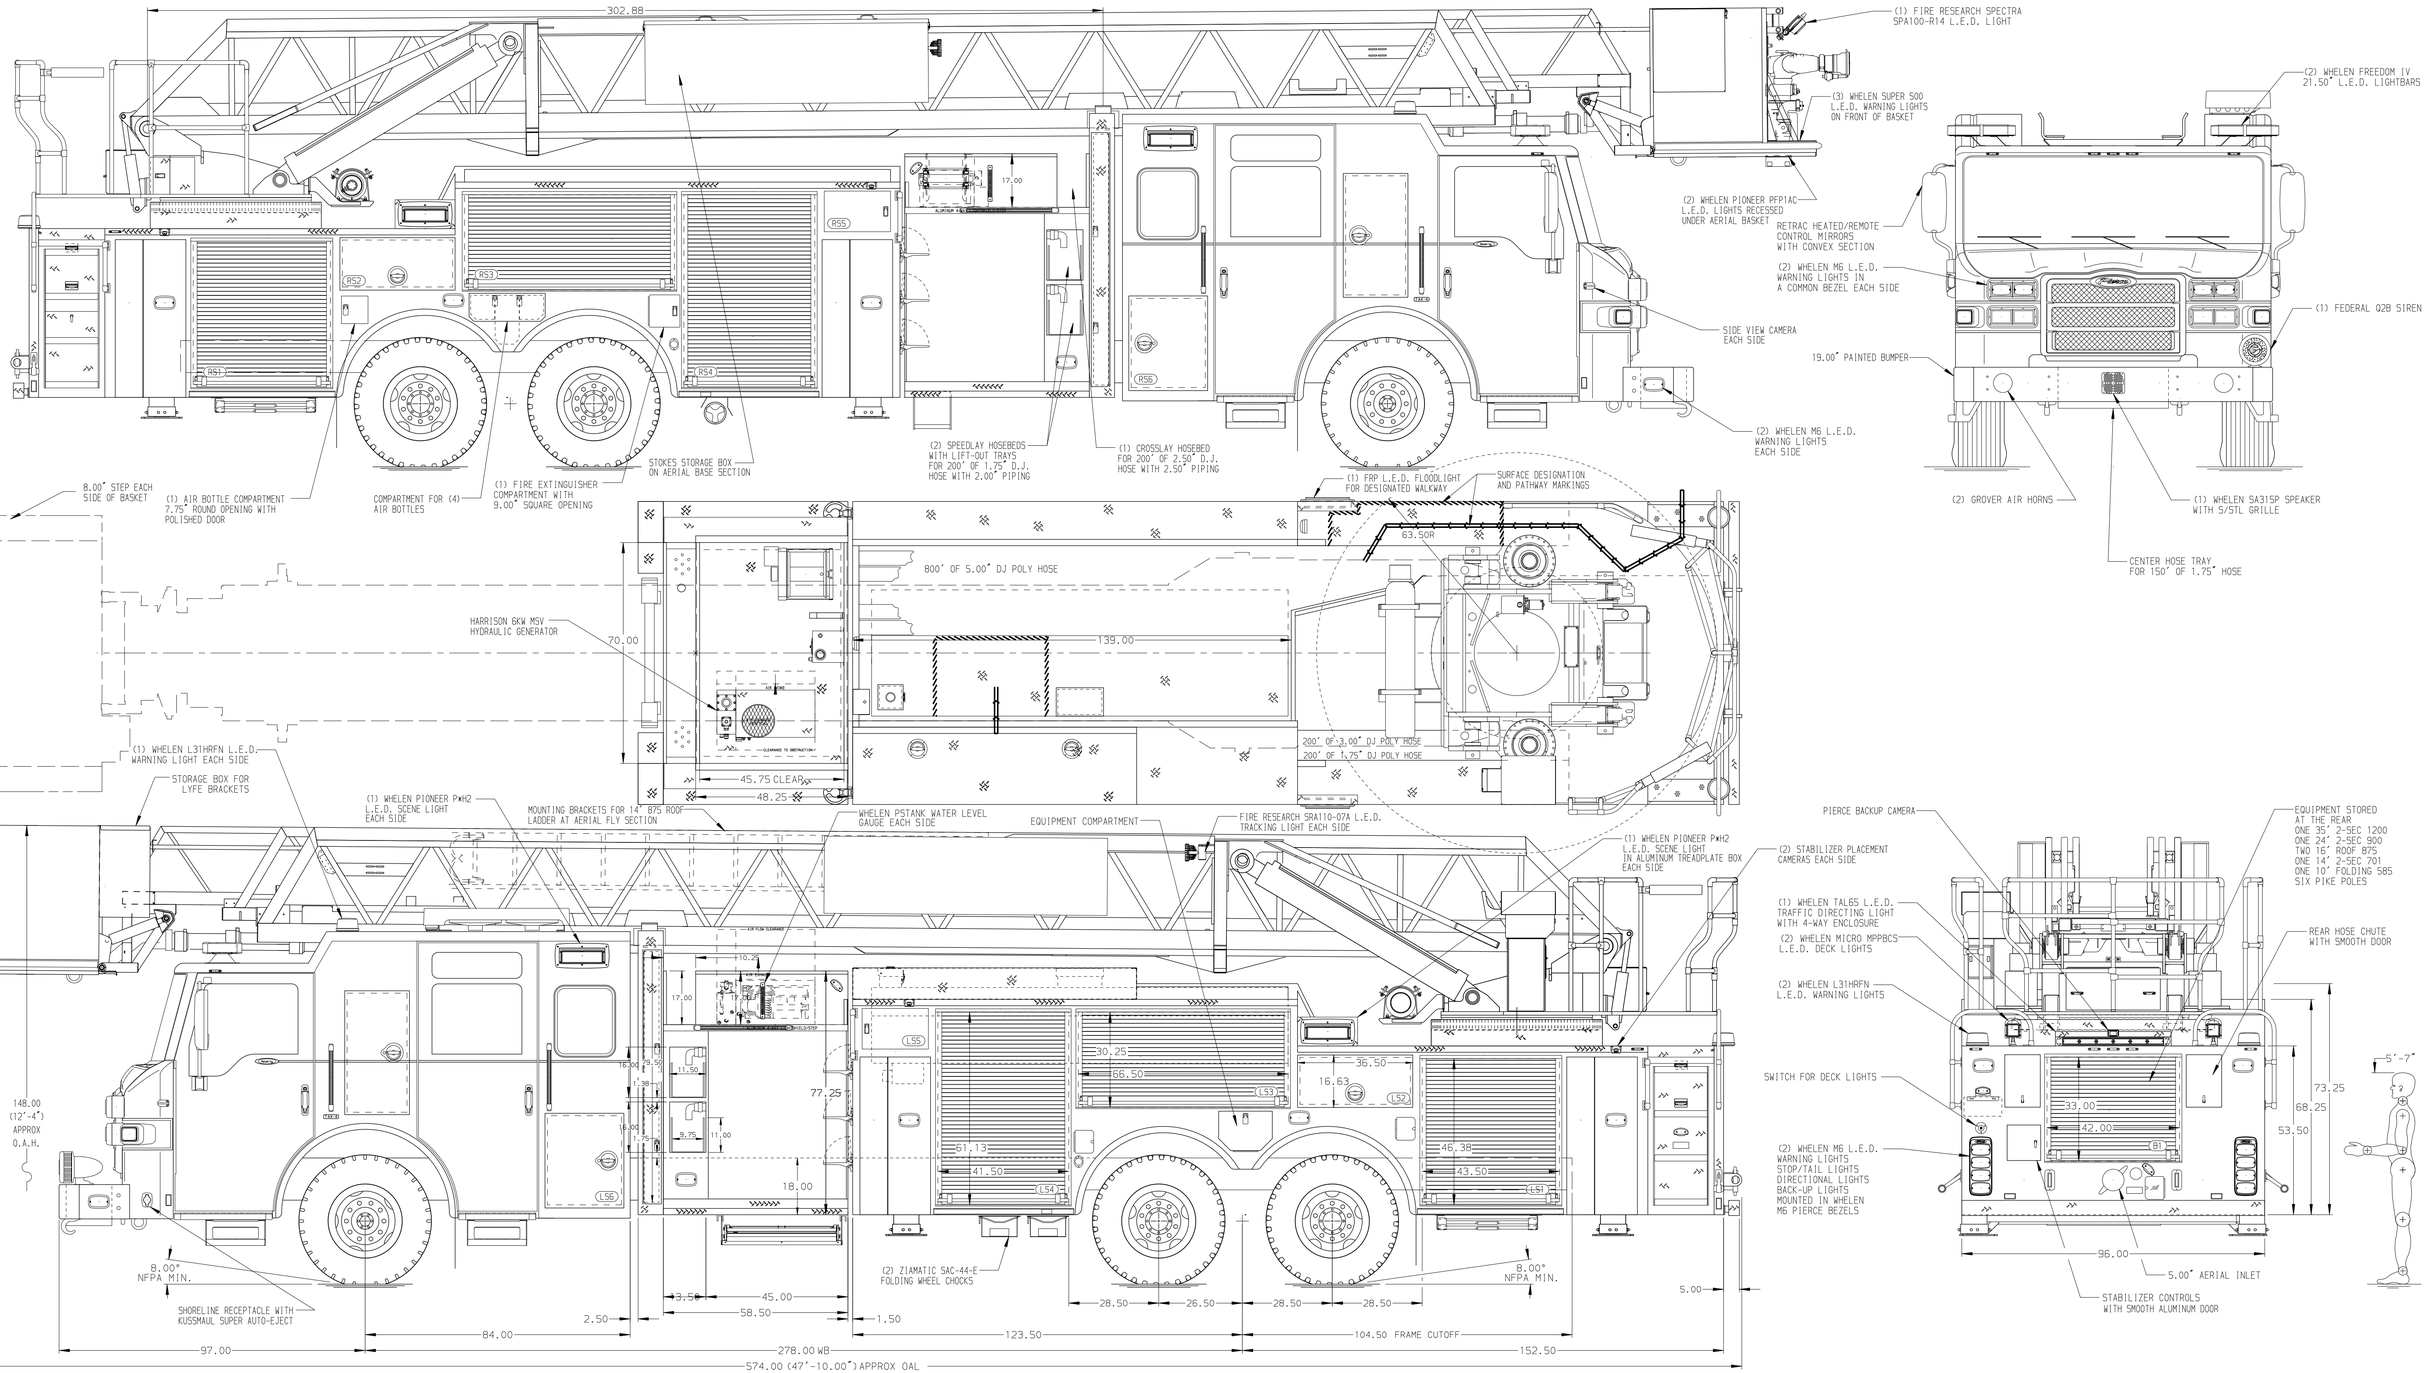

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED IN DRIVER'S STEP WELL
6. FOUR ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH 2.00" SIDES IN COMPARTMENT PER SHOP ORDER
8. 3.00" RAISED AERIAL PEDESTAL
9. 3-in-1 LYFECOMBO BRACKETS AT AERIAL BASKET
10. ONE SLIDE OUT PEGBOARD WITH TRAY ON UNDERSIDE LOCATED IN COMPARTMENT PER SHOP ORDER
11. KUSSMAUL AIR COMPRESSOR LOCATED BEHIND DRIVER'S SEAT
12. 2-WAY INTERCOM SYSTEM BETWEEN AERIAL TIP AND TURNTABLE
13. BREATHING AIR TO AERIAL BASKET
14. TEMPORARY VENT SAW SCABBARD LOCATED IN AERIAL BASKET
15. CIRCUIT BREAKER PANEL IN COMPARTMENT PER SHOP ORDER
16. SEVEN S/STL DRIP PAN/GUARDS FOR ROLL-UP DOORS LOCATED PER SHOP ORDER
17. ONE SWING-OUT ALUMINUM TOOL BOARD IN COMPARTMENT PER SHOP ORDER
18. ONE TILT/SLIDE OUT TRAY LOCATED IN COMPARTMENT PER SHOP ORDER
19. ONE AKRON ELECTRIC REWIND CORD REEL WITH 150' OF 10/3 CABLE LOCATED IN STABILIZER COMPARTMENT AND ONE ABOVE PUMP HOUSE
21. TWO FULL WIDTH/ FULL DEPTH FLOOR MOUTNED SLIDE-OUT TRAYS LOCATED IN COMAPARTMENTS PER SHOP ORDER
21. 12.00" OF LIMITED RETRACION
22. L.E.D. LIGHTING ON AERIAL LADDER SECTIONS
23. 120V POWER TO AERIAL BASKET
24. ONE CTECH DRAWER LOCATED IN COMPARTMENT PER SHOP ORDER
25. ONE VERTICAL DIVIDER LOCATED IN COMPARTMENT PER SHOP ORDER
26. WIRELESS CAMERA AT FRONT OF PLATFORM
27. HOSE STORAGE BOX ON RIGHT SIDE OF BASKET FOR 100' OF 1.75" D.J. POLY HOSE

REV	DATE	BY	CH
1	03JUN19	SVA	MSA
2	06MAY19	SVA	MSA
3	02APR19	SVA	NDA

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY

Pierce MANUFACTURING INC.

TITLE: 100' AERIAL PLATFORM AND BODY ASSMEBLY
400 GALLON WATERTANK-380 WATER/20 FOAM

FOR: DFW INTERNATIONAL AIRPORT
DALLAS FORT WORTH, TX

DWG NO. 33793AD

JOB NO.	33793
SCALE	1:24
DATE	
DRAWN BY	SVA
DATE	20MAR19
CHECKED BY	NDA
DATE	29MAR19
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 03-JUN-2019 12:18:56