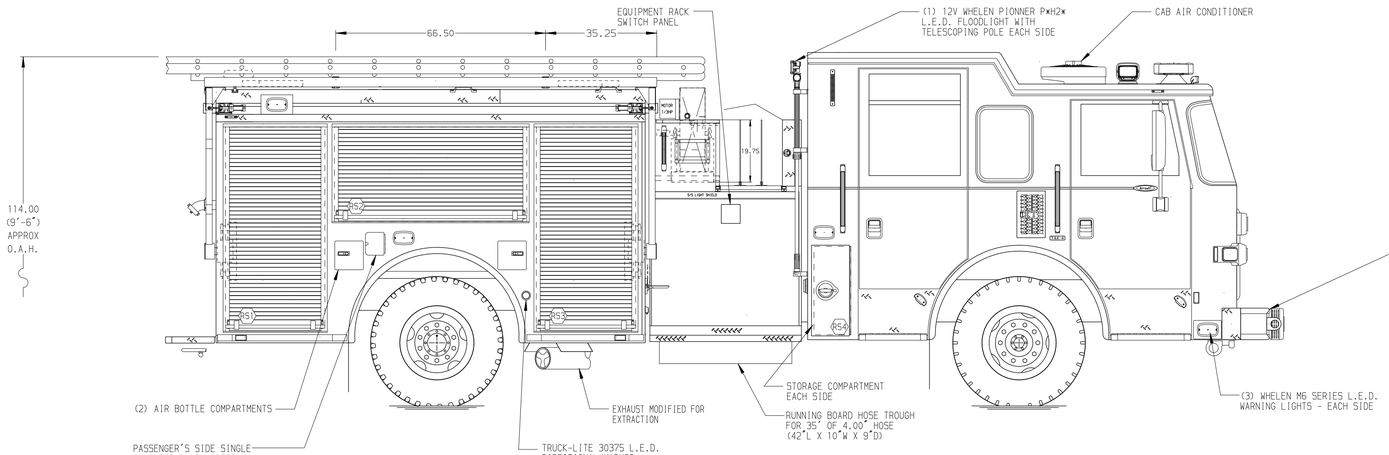

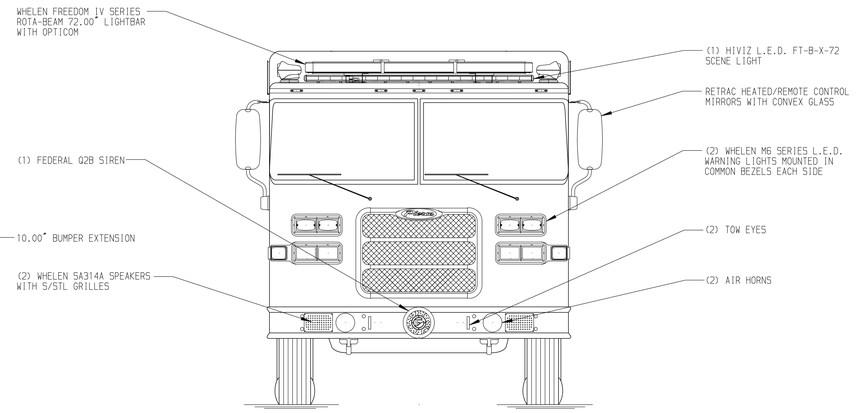

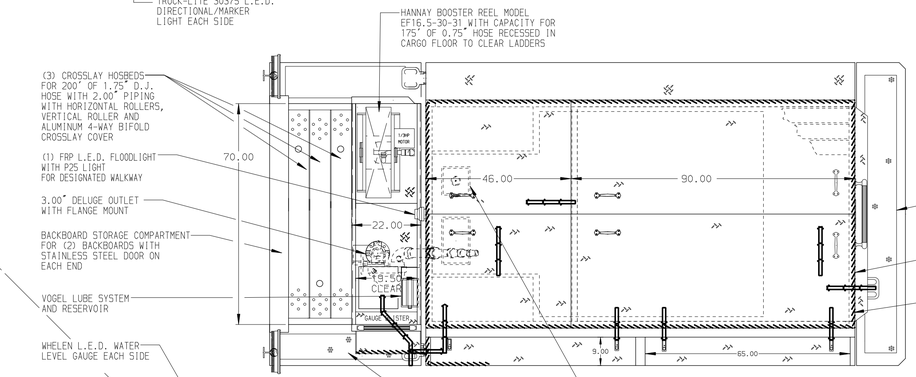

HOSEBED CAPACITIES
1. 900' OF 4.00" D.J. POLY
2. 750' OF 2.50" D.J. POLY
3. 200' OF 2.50" D.J. POLY

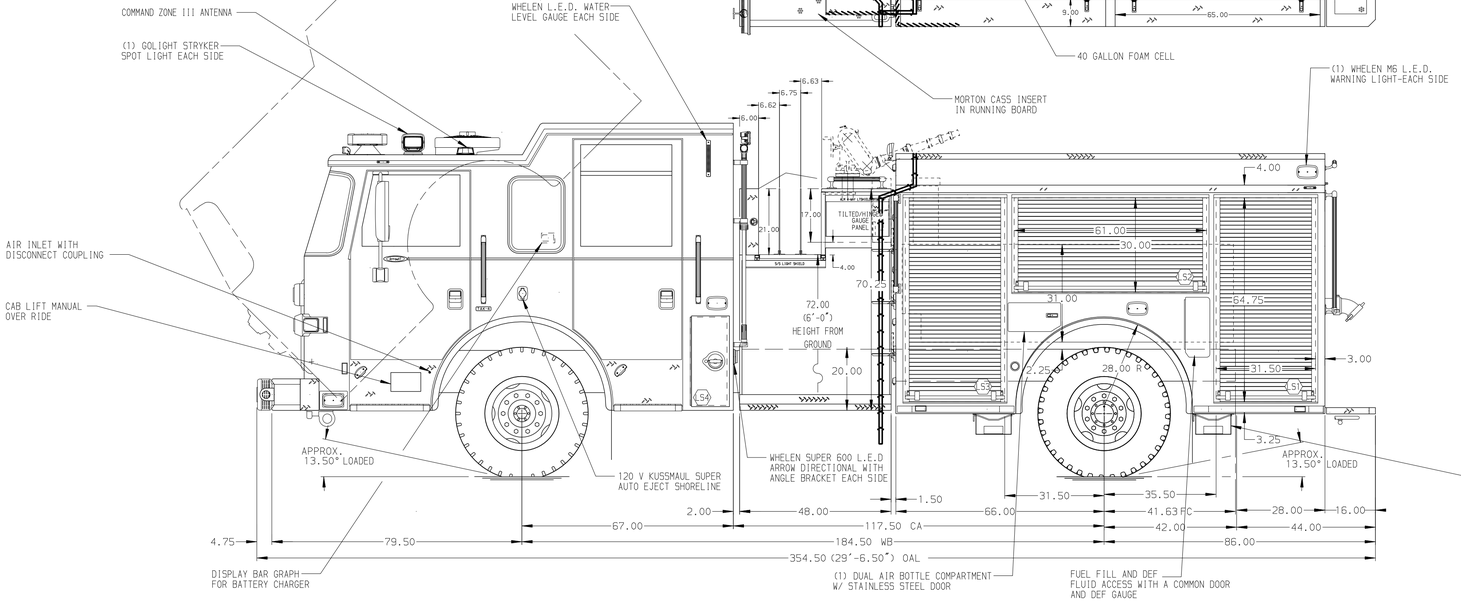

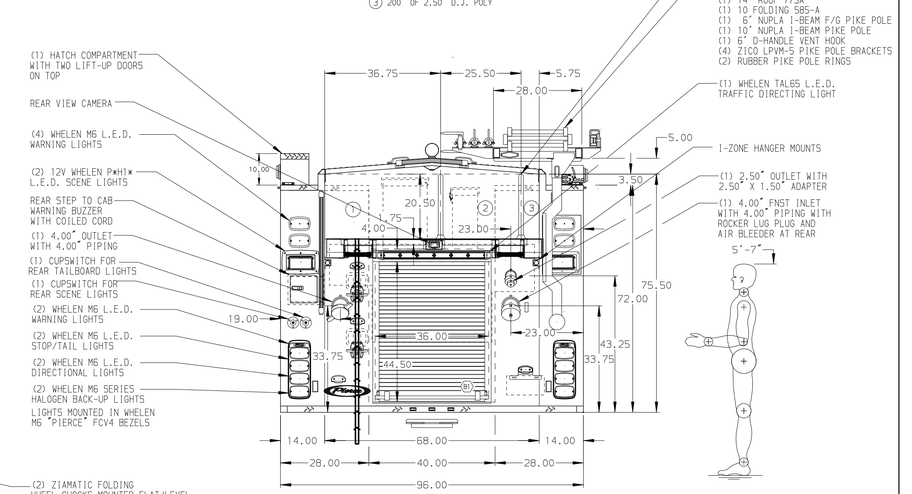

GALVANNEAL BODY

MAXIMUM O.A.L. 372.00"

MAXIMUM O.A.H. 114.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. MOUNTING BASE FOR ANTENNA LOCATED PER SHOP ORDER
2. S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
3. KEYED LOCK FOR LATCH FOR ALL COMPARTMENTS AND CAB DOORS
4. TURTLE TILE MATTING ON FLOOR IN COMPARTMENTS LS1, LS2, RS1, RS2, & RS3
5. TWO ADJUSTABLE SHELVES(FULL DEPTH/WIDTH) IN COMPARTMENTS LS1, RS1, & RS3, ONE SHELF EACH IN COMPARTMENTS LS3, RS2 & B1
6. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
7. FOAMPRO 2002 SINGLE AGENT FOAM SYSTEM
8. TURTLE TILE MATTING ON ALL SHELVES
9. S/STL PROTECTIVE GUARD ON ALL ROLL-UP DOORS
10. ONE SLIDE-OUT FLOOR MOUNTED TRAY WITH SIDE SLIDES IN COMPARTMENT B1
11. BOLT-IN PARTITION BETWEEN COMPARTMENTS LS1/B1 & RS1/B1
12. RESPOND READY STORAGE CABINET LOCATED IN COMPARTMENT LS3
13. MIC & SPEAKER COMPARTMENT LOCATED ON DS PUMP PANEL
14. BATTERY CHARGER/COMPRESSOR LOCATED IN COMPARTMENT LS3
15. ONE AIR OUTLET WITH SHUT OFF VALVE LOCATED ON EACH SIDE PUMP PANEL

REV	DATE	BY	CH
V	26NOV19	AMI	MSA
V	14NOV19	AMI	MSA
V	210CT19	AMI	SHA
V	040CT19	SHA	JBL
V	030CT19	SHA	JBL

CHASSIS DATA
MAKE: PIERCE
MODEL: ARROW XT

TITLE: 1500-D-500 POLY W/40 GAL FOAM CELL, 136" BODY, HB COVER, DS HATCH, ABC'S, 2000 RACK, (3)X-LAYS

FOR: SAN DIEGO FIRE DEPARTMENT
SAN DIEGO, CALIFORNIA

DWG NO. 34076AD

Pierce MANUFACTURING INC.

JOB NO.	34076 (01-04)
SCALE	1:24
DATE	
DRAWN BY	SHA
	15JUL19
CHECKED BY	JBL
	23JUL19
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 10-DEC-2019 06:58:36