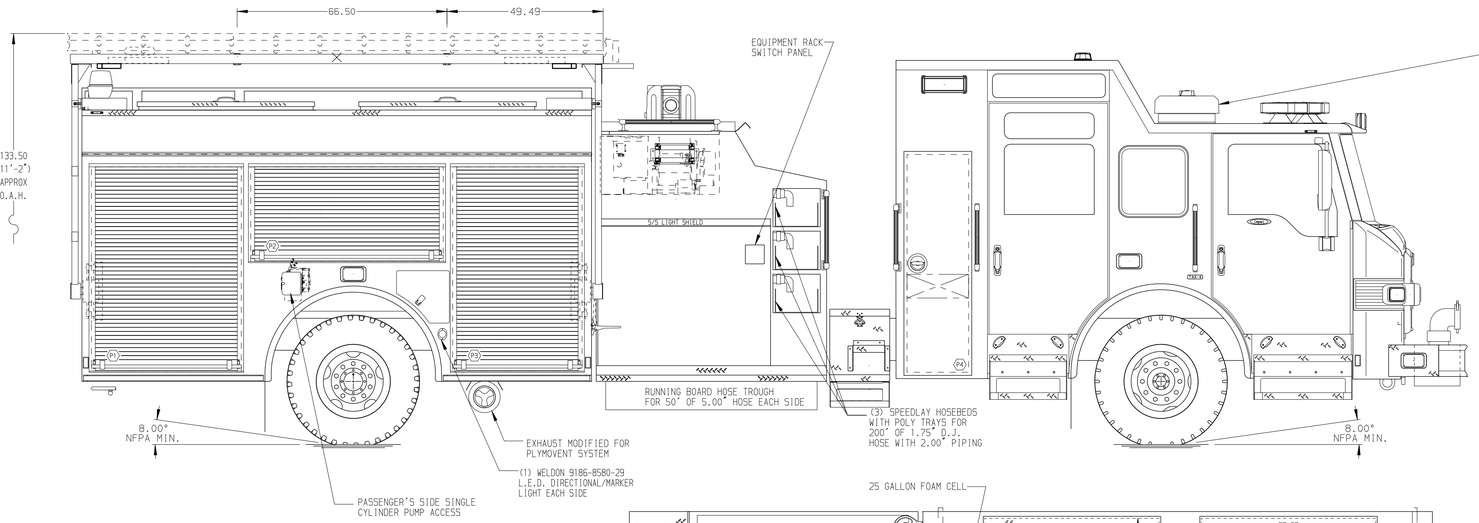

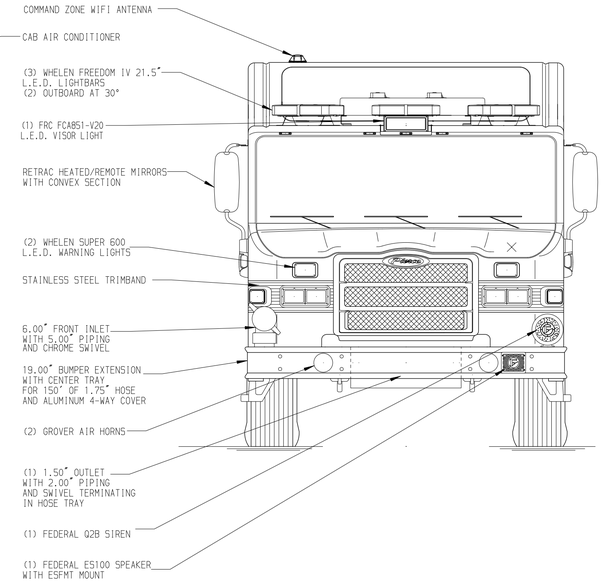

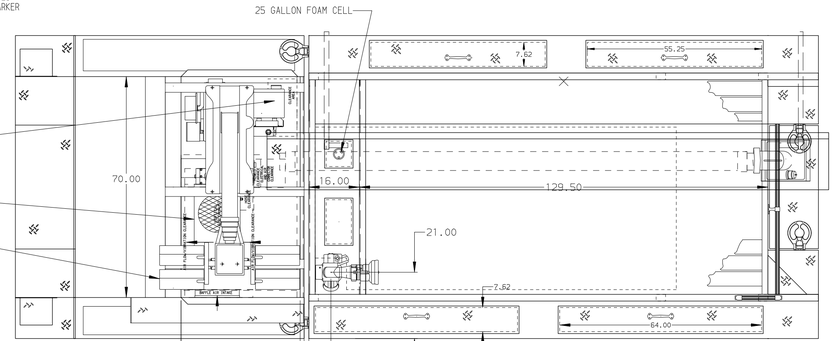

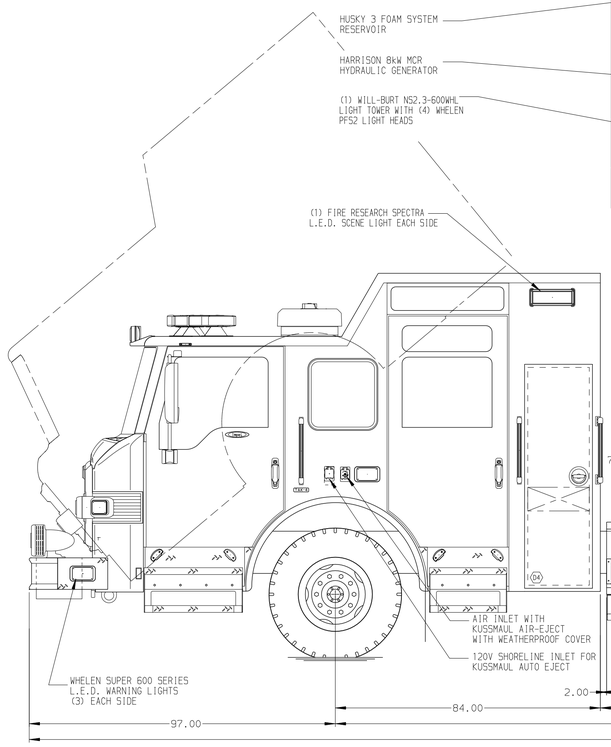

HOSEBED CAPACITIES
① - 1000' OF 5.00" HOSE
- 800' OF 2.50" HOSE
② - 200' OF 1.75" HOSE

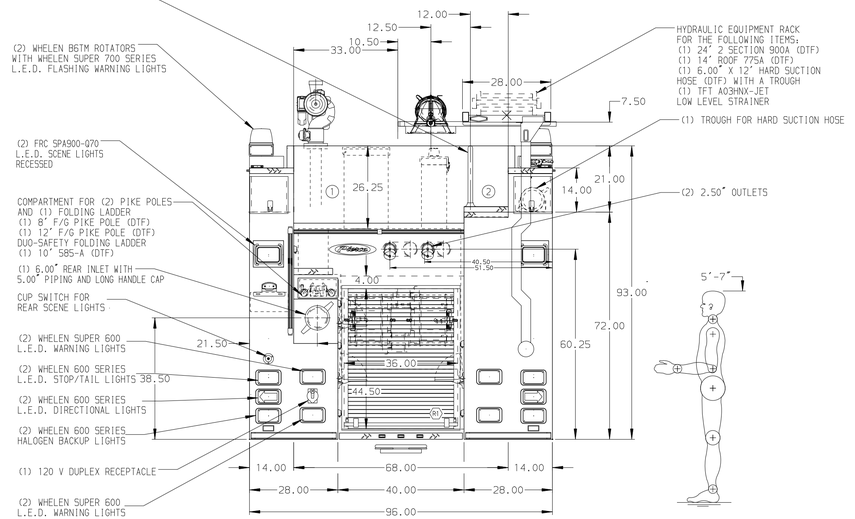

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN COMPARTMENT D3
2. BATTERY CHARGER INDICATOR LOCATED ON D.S. SEAT WITH BRACKET
3. 5/5TL PROTECTIVE GUARD FOR ROLL-UP DOOR LOCATED ALL ROLL UP DOORS
4. FULL WIDTH/DEPTH ADJUSTABLE SHELVES TWO IN D1 AND P1 AND ONE IN D3,R1,P2 AND P3
5. TWO ADJUSTABLE SLIDE-OUT TOOL BOARDS IN COMPARTMENT P1
6. ONE VERTICAL PARTITION IN P1
7. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
8. ONE HANNAY ELECTRIC REWIND CORD REEL MODEL 1618-17-18 LOCATED IN CARGO AREA ABOVE PUMP WITH 200' OF 10/3 CABLE, A WITH CAPTIVE ROLLER ASSEMBLY, AND AN ALUMINUM JUNCTION BOX HOLDER
9. (1) 120V 6-PLACE RECEPTACLE IN EACH EMS COMPARTMENT
10. (1) 120V DUPLEX RECEPTACLE LOCATED ON THE DRIVERS SIDE OF THE PUMP PANEL
11. (1) 120V DUPLEX RECEPTACLE IN COMPARTMENTS D1, D3, P1, P3, AND R1
12. (1) 240 V RECEPTACLE ON THE FRONT WALL OF D1
13. MOUNTING PROVISIONS FOR TWO HANNAY ELECTRIC REWIND HYDRAULIC HOSE REELS MODEL 2016-17-18 WITH CAPACITY FOR 100' OF .25" I.D. DUAL HYDRAULIC HOSE LOCATED IN COMPARTMENT R1
14. ONE TILT/ SLIDE-OUT TRAY IN P3

REV	DATE	BY	CH
▽	06SEP16	LST	JBO
▽	18AUG16	LST	JBO
▽	10AUG16	LST	JBO

CHASSIS DATA
MAKE: PIERCE
MODEL: IMPEL

Pierce MANUFACTURING INC.

TITLE: 1500-D-775, 750 GAL WATER W/25 GAL FOAM; 161" BODY
DS FL HGHT FRNT & RR, FDLER, PS FL HGHT & DPTH

FOR: JEFFERSON FIRE DEPARTMENT
JEFFERSON, WISCONSIN

DWG NO. 30120AD

JOB NO.	30120
SCALE	1:24
DATE	
DRAWN BY	LST
DATE	09MAY16
CHECKED BY	MGE
DATE	12MAY16
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 07-SEP-2016 09:09:27