

PH1083DBR 1083nm Series


High-Power Single-Frequency Laser Diode

Technology

- DBR Single-Frequency Laser Chip
- InGaAs QW Active Layer
- Epi designed for high reliability

Features

- Available in several package styles
- Pulsed operation for spectral stability at short pulse lengths
- High power for CW applications
- High Slope Efficiency

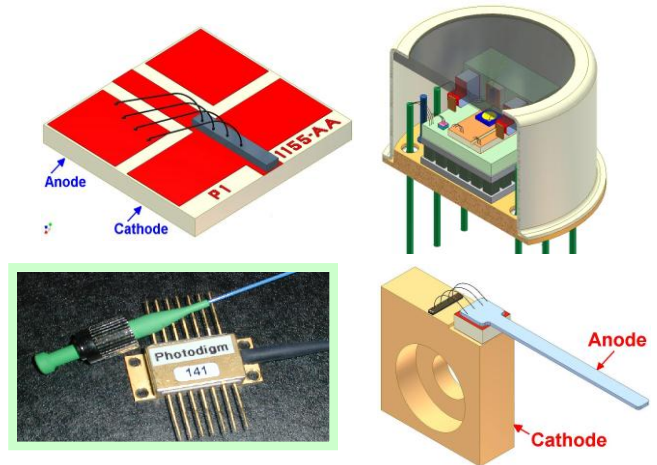

Description

The PH1083DBR Series of high-power edge-emitting lasers are based on Photodigm's advanced single-frequency laser technology. It provides a diffraction limited, single lateral and longitudinal mode beam. Facets are passivated for high-power reliability. Applications include fiber amplifier seeding, spectroscopy, difference frequency generation, and low power DPSS replacement.

Absolute Maximum Ratings

| Parameter | Symbol | Unit | Min | Max |
|--|-------------------|------|------|-------|
| Storage Temperature | T _{STG} | °C | 0 | 80 |
| Operating Temperature | T _{OP} | °C | 5.0 | 70 |
| CW Laser Forward Current, T=T _{op} | I _F | mA | - | 300** |
| Pulsed Laser Forward Current, T=25°C, PW=300 ns, DC=10% | I _F | A | - | 1.0 |
| Laser Reverse Voltage | V _R | V | - | 2.0 |
| Photodiode Forward Current <u>1/ 2/</u> | I _P | mA | - | 5.0 |
| Photodiode Reverse Voltage <u>1/ 2/</u> | V _R | V | - | 20.0 |
| Photodiode Dark Current, V _R =10V, LD I _F =0, <u>1/ 2/</u> | I _D | nA | - | 50 |
| TEC Current <u>1/ 2/</u> | I _{TEC} | A | -2.5 | 2.5 |
| TEC Voltage <u>1/ 2/</u> | V _{TEC} | V | -6.0 | 6.0 |
| Thermistor Current <u>1/ 2/</u> | I _{THRM} | mA | - | 1.0 |
| Thermistor Voltage <u>1/ 2/</u> | V _{THRM} | V | - | 10 |
| ESD (HBM) | - | V | - | 500 |
| External Back Reflection | - | dB | - | -14 |
| Lead Soldering Temperature, 10 sec. Max., <u>1/ 2/</u> | - | °C | - | 260 |
| Fiber Pull Force <u>1/</u> | - | N | - | 5.0 |
| Fiber Bend Radius <u>1/</u> | - | mm | - | 35 |

1/ Butterfly package 2/ TO-8 package **Do not exceed drive current or operating power of supplied LIV**

CW Characteristics at T_C = 25°C unless otherwise specified

| Parameter | Symbol | Unit | Min | Typ | Max |
|---|-------------------------------------|------------|----------------------------|--------|--------|
| Center Wavelength | λ_c | nm | 1081 | 1083 | 1085 |
| Optical Output Power @ LIV current | P _o | mW | See Power Options Call-out | | |
| Slope Efficiency, <u>1/</u> | η_d | W/A | 0.3 | 0.36 | |
| Slope Efficiency | η_d | W/A | 0.6 | 0.72 | - |
| Threshold Current | I _{th} | mA | - | 30 | 40 |
| Laser Series Resistance | R _S | Ω | - | 2.0 | 2.5 |
| Laser Forward Voltage | V _F | V | - | 2.0 | 2.5 |
| Thermistor Resistance @ 25°C, <u>2/</u> | R _T | K Ω | - | 10 | - |
| Photodiode Dark Current, V _R =10V, LD I _F =0, <u>2/</u> | I _D | nA | - | - | 50 |
| Beam Divergence @ FWHM | $\theta_{ } \times \theta_{\perp}$ | ° | - | 6 X 32 | 8 X 34 |
| Laser Line Width | $\Delta\nu$ | MHz | - | 8 | 10 |
| Side Mode Suppression Ratio | SMSR | dB | -30 | - | - |
| Polarization Extinction Ratio, <u>1/</u> | PER | dB | -16 | -19 | - |
| Laser Polarization | | | | TE | |
| Mode Structure | | | Fundamental Mode | | |

1/ Butterfly package 2/ TO-8 package

Handling Precautions

These devices are sensitive to ESD. When handling the module, grounded work area and wrist strap must be used. Always store in an antistatic container with all leads shorted together.

How To Order

Part number example: PH1083DBR040BF. Assign optical power from those shown below. Use a three-digit format for all power entries. Call factory for special frequency selection and certification to certain atomic absorption lines. Butterfly package offered at 50% of output powers shown.


PH1083DBR 

Operating Power (mW)

040
080
120

Package Type

CS Chip on Submount
CM 'C' Mount
BF Butterfly
T8 TO-8

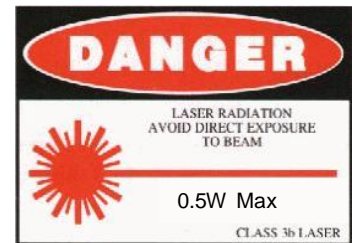

Photodigm, Inc. reserves the right to make changes in design, specifications and other information at any time, and without prior notice. The information contained within the product bulletin is believed to be accurate. However, no responsibility is assumed for possible inaccuracy or omission. Any information contained herein shall legally bind Photodigm, Inc. only if it is specifically incorporated in the terms and conditions of a sales agreement.