

clare™ CS-PNC-10 Panic Pendant



The CS-PNC-10 is a supervised portable device used to trigger a panic alarm.

Features


- Water resistant housing
- Low battery indication
- Secure encrypted wireless transmissions
- Can be worn with a lanyard or wristband



Enroll the panic by placing the panel into wireless enrollment mode and pressing the red panic button. Alternatively, the panic can be enrolled by scanning its bar code using the Install Assist App or by entering its 8-character serial number on the interactive service provider's web portal.

Operate by pressing the red panic button until the LED starts flashing.

Wear using the included lanyard or wristband. Note: To install the wristband you must first remove the clear plastic tube used to attach the lanyard.

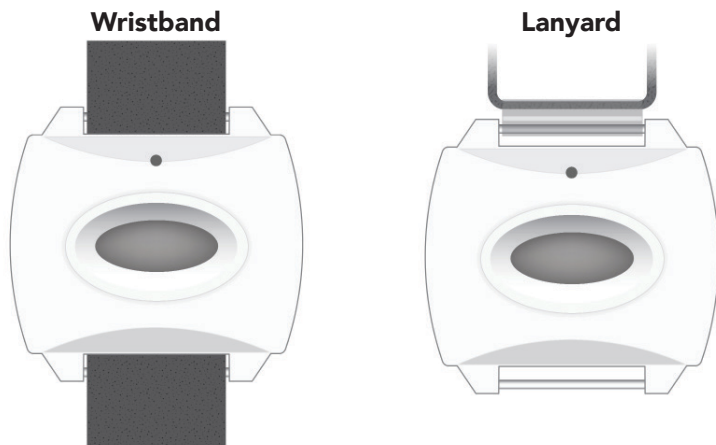

Use the panel installation guide to verify proper system setup.

Specifications

Physical	
Housing Dimensions	1.5 x 1.2 x .6 inches (3.8 x 3.0 x 1.5 centimeters)
Weight with Battery	0.6 ounces (18 grams)
Environmental	
Operating Temperature	32°F to 120°F (0°C to 49°C)
Maximum Humidity	85% non-condensing relative humidity
Sensor Specifications	
Frequency	433.92 MHz
Replacement Battery	One Panasonic CR1632
Nominal Battery Life	4-6 Years
Transmitted Indications	Low Battery, Panic, Supervision
Certification	
RE603	FCC, IC, RCM, EN 60950-1, EN 300 220, EN 301 489, CE Security Grade 2, CE Environmental Class 2

Specifications subject to change without notice

The logo for Clare Controls, featuring the word "clare" in a lowercase, sans-serif font with a trademark symbol (TM) to the upper right.

2019-02-1842-01
941.238.3991

www.ClareControls.com

Original document below

<https://bit.ly/2Nq8hf5>