
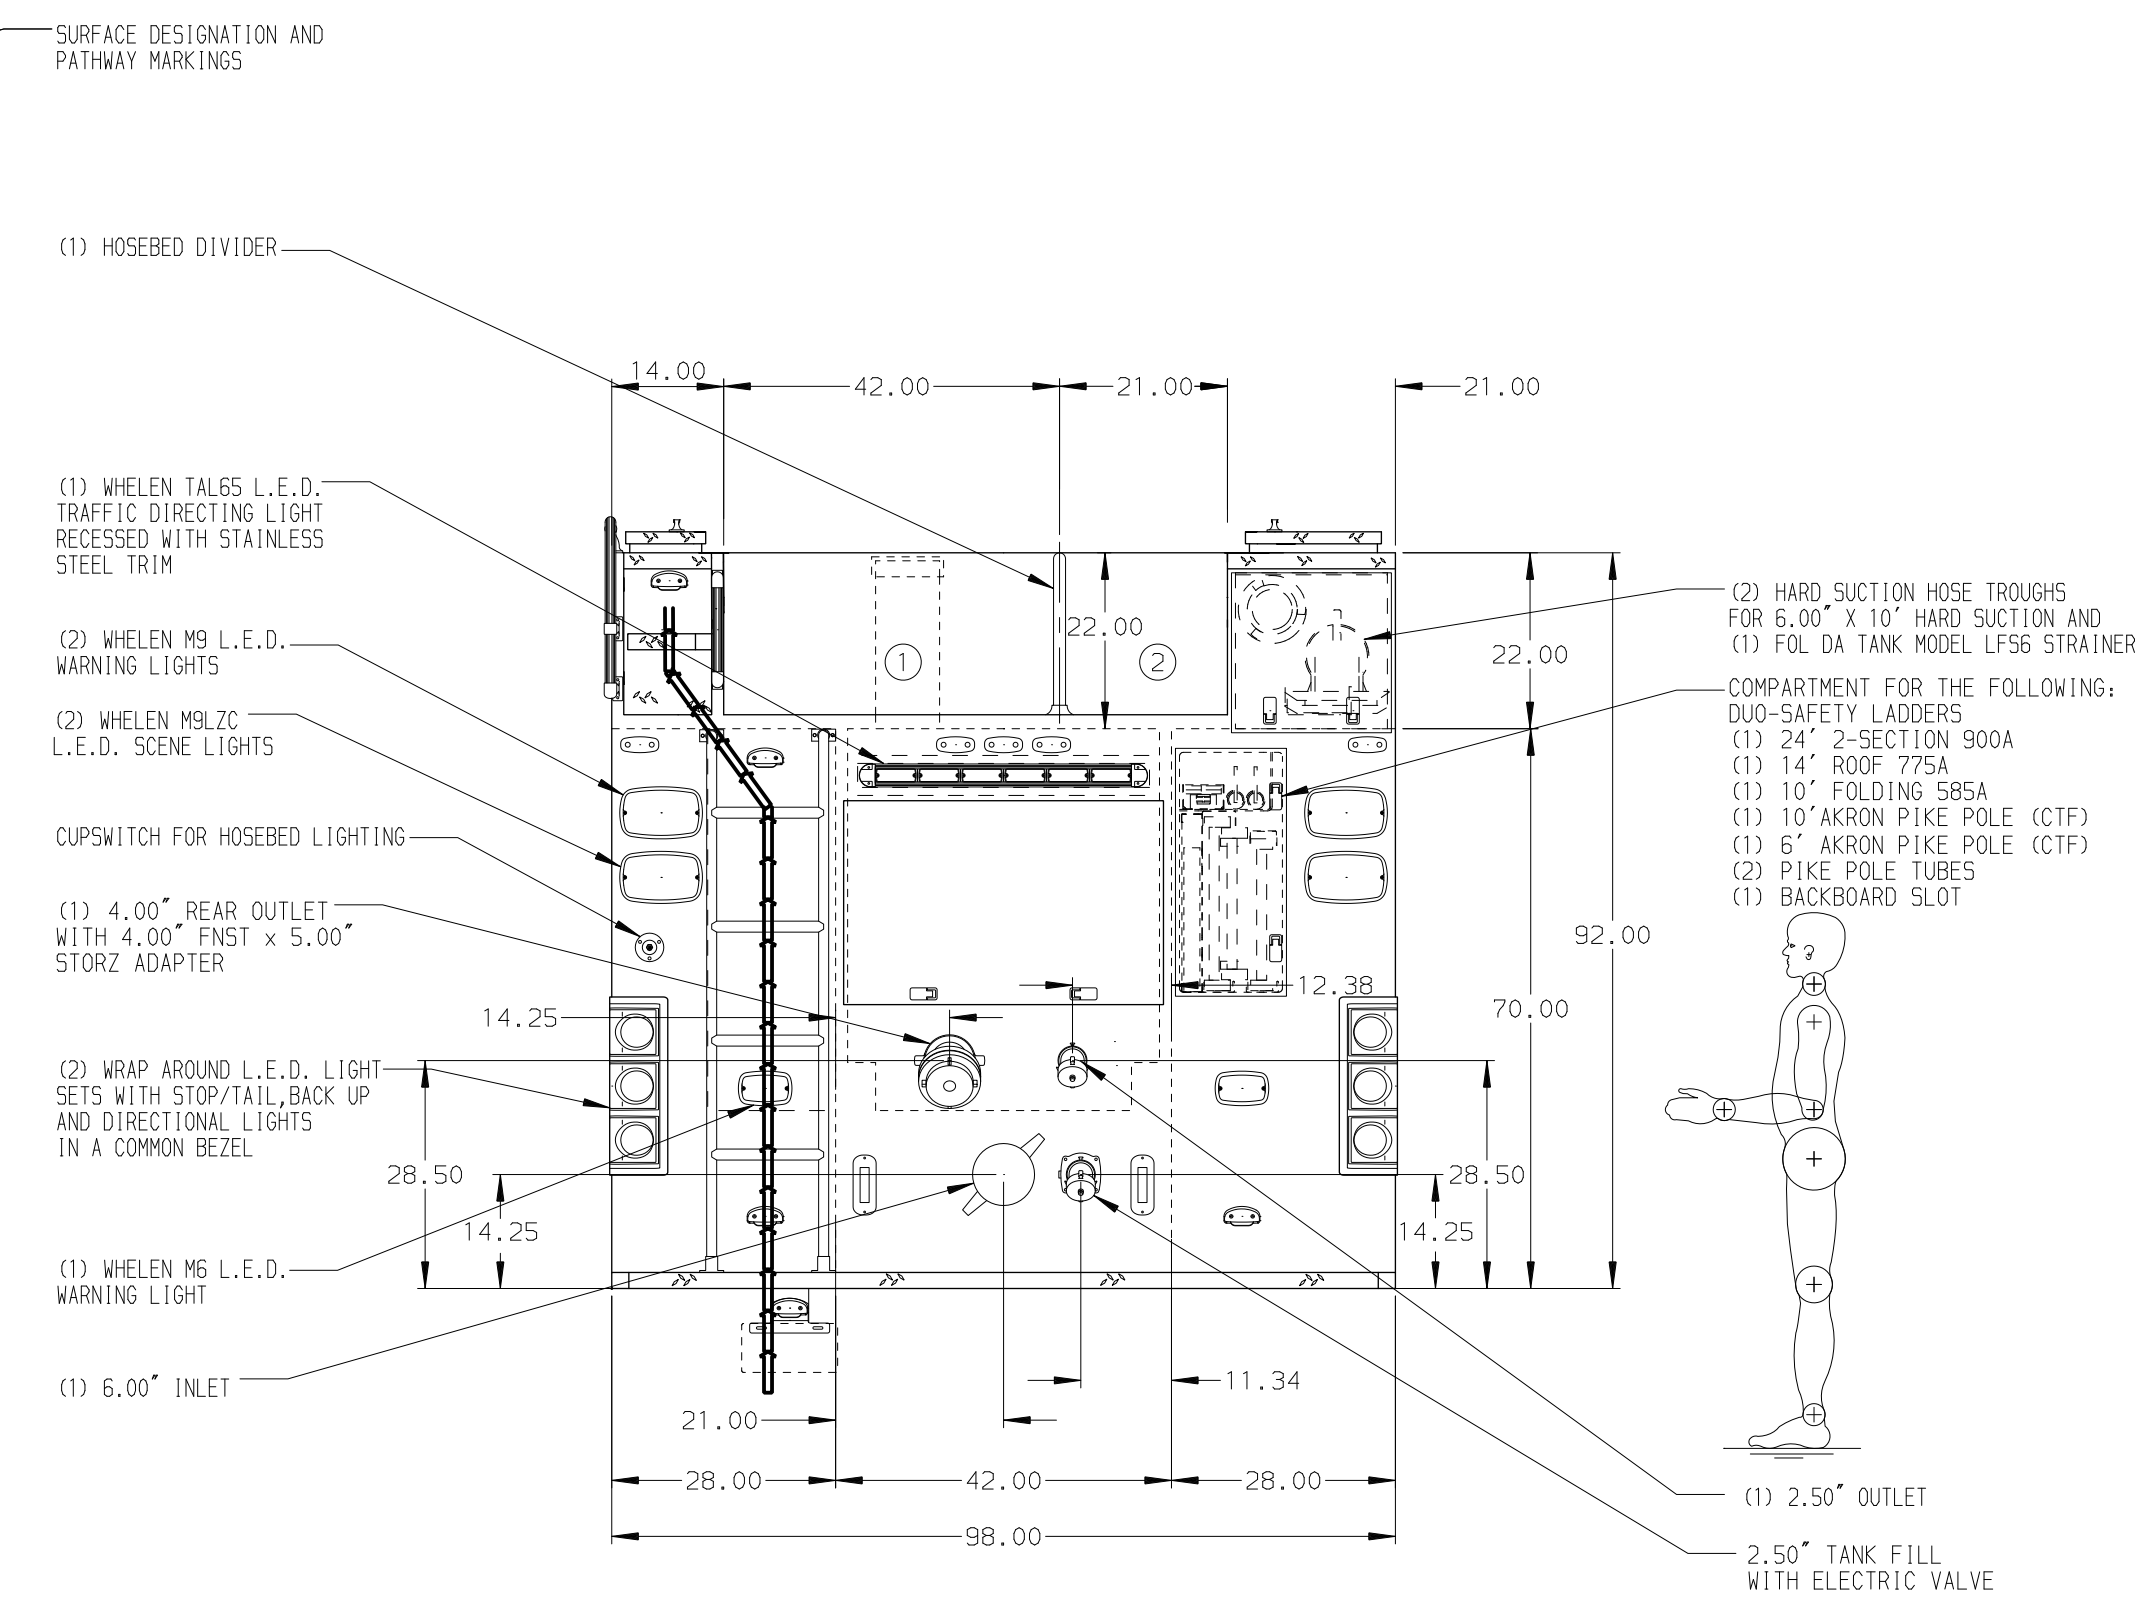


HOSEBED CAPACITIES
 ① 1000' OF 5.00" D.J. HOSE
 ② 700' OF 3.00" D.J. HOSE

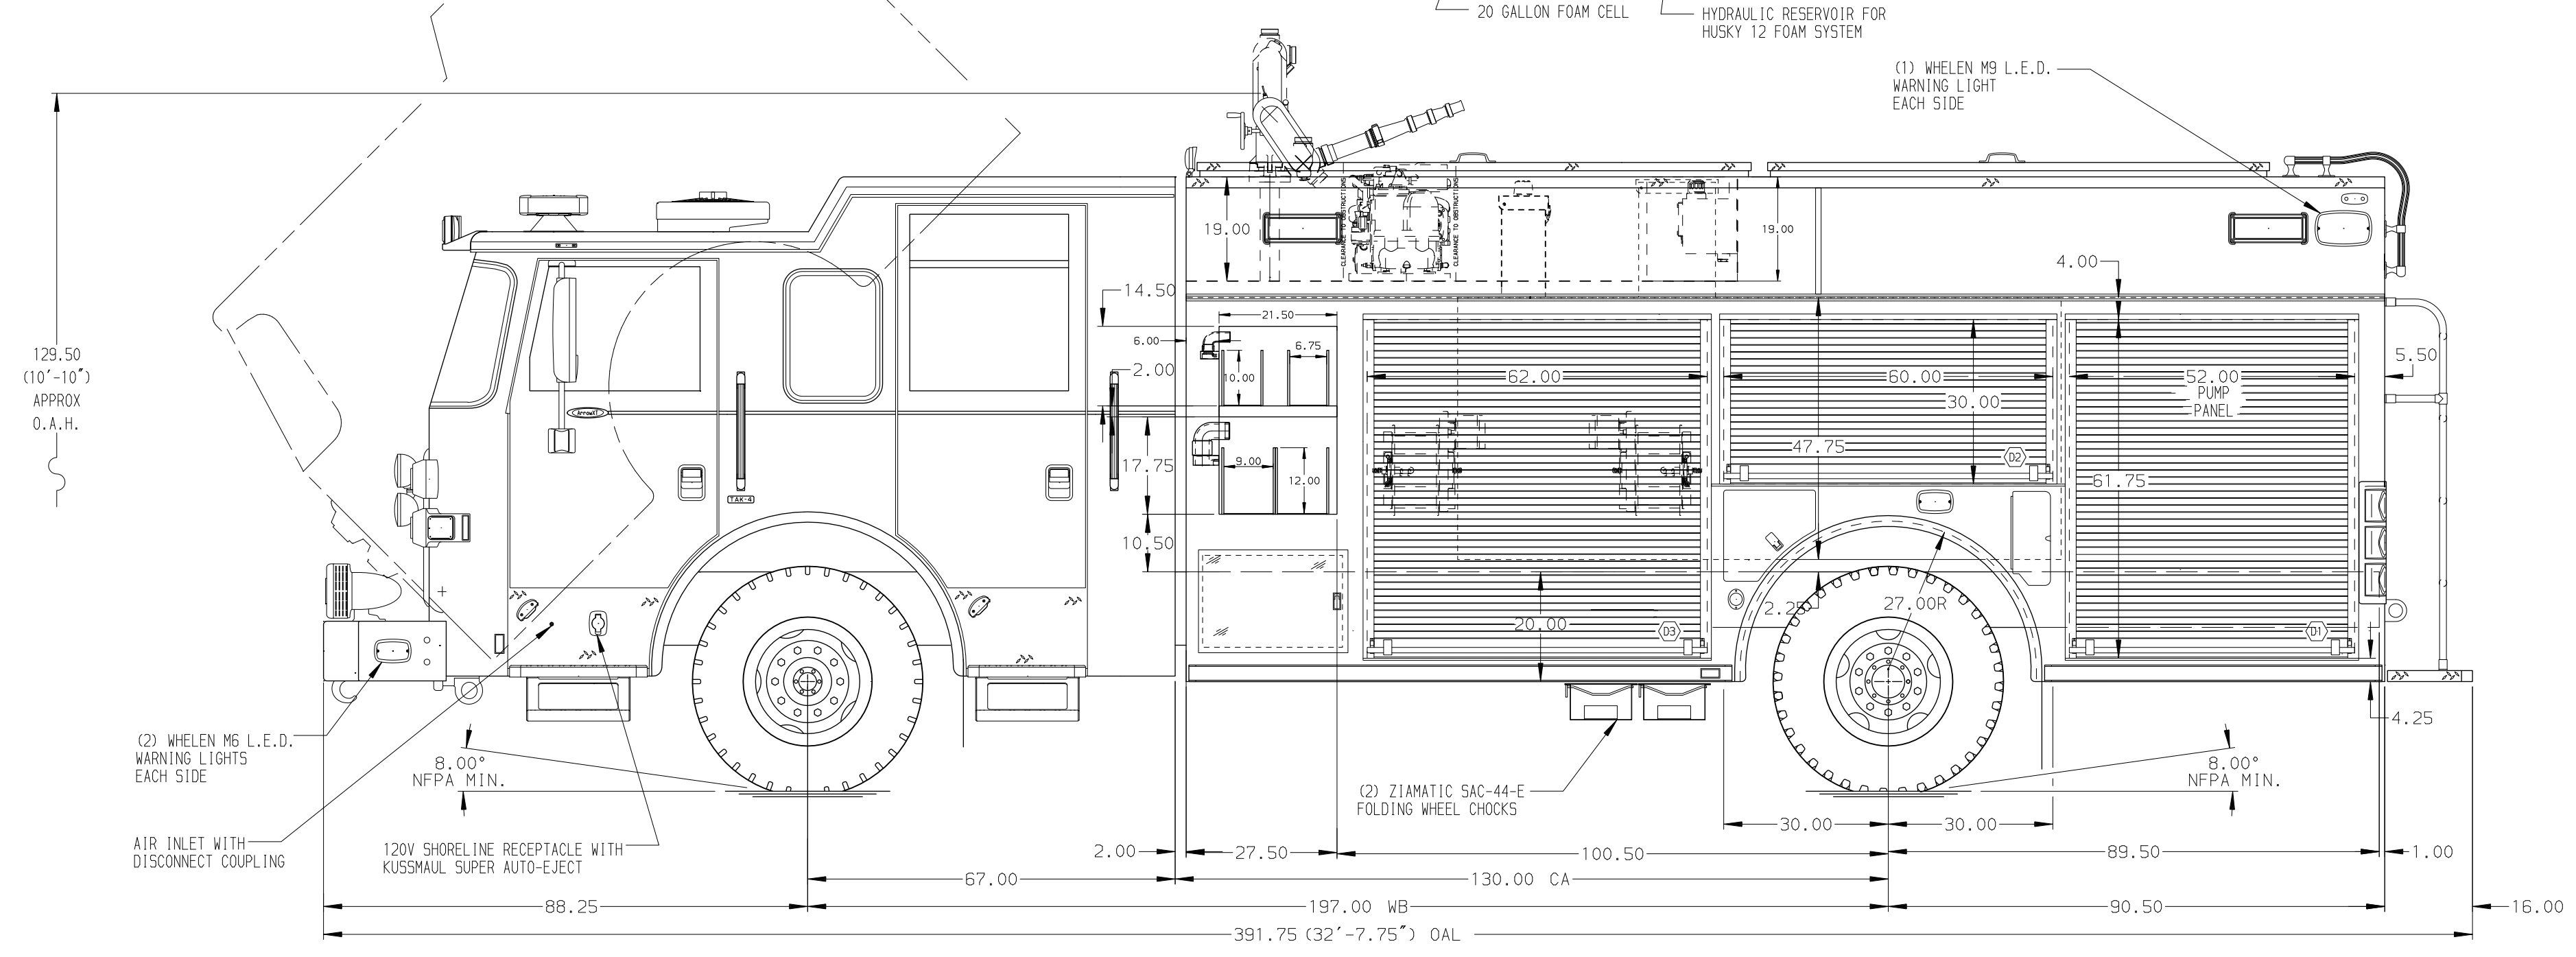

STAINLESS STEEL BODY

SIDE ROLL PROTECTION

NOTE
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
 MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER LOCATED IN D3
- BATTERY CHARGER INDICATOR LOCATED NEAR D.S. SEAT RISER WITH BRACKET
- ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN D1, D3, P1, AND P3
- ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH 2" SIDES IN D1, D3, P1, AND P3
- ONE SWING-OUT ALUMINUM TOOL BOARD IN P2
- ONE ADJUSTABLE TILT / SLIDE-OUT TRAY IN D2
- CIRCUIT BREAKER PANEL IN D3
- ONE HANNAY ELECTRIC REWIND CORD REEL MODEL 1618-17-18 WITH 200' OF 10/3 CABLE IN HATCH COMPARTMENT ABOVE P3
- (1) DUPLEX RECEPTACLE IN THE CENTER EMS CABINET
- MOUNTING PROVISIONS FOR (2) HANNAY MODEL EF2016-17-18 HYDRAULIC REELS IN D3

REV	DATE	BY	CH	ARROW	XT	CHASSIS DATA
30MAR17	LST	JBO				TITLE
20MAR17	LST	JBO				FOR
24JAN17	LST	JBO				DWG NO.
05OCT16	LST	MGE				

		JOB NO.	30641
		SCALE	DATE
TITLE 1250-D-710 GAL WATER W/ 20 GAL FOAM CELL, 191" REAR MOUNT, (4) SPEEDLAYS, LADDERS THRU BODY, GENERATOR	DRAWN BY LST	DATE	
		CHECKED BY MGE	20SEP16
FOR PRINCETON FIRE DEPARTMENT PRINCETON, ILLINOIS	SHEET SIZE D	SHEET NO. 1 OF 1	
DWG NO. 30641AD			