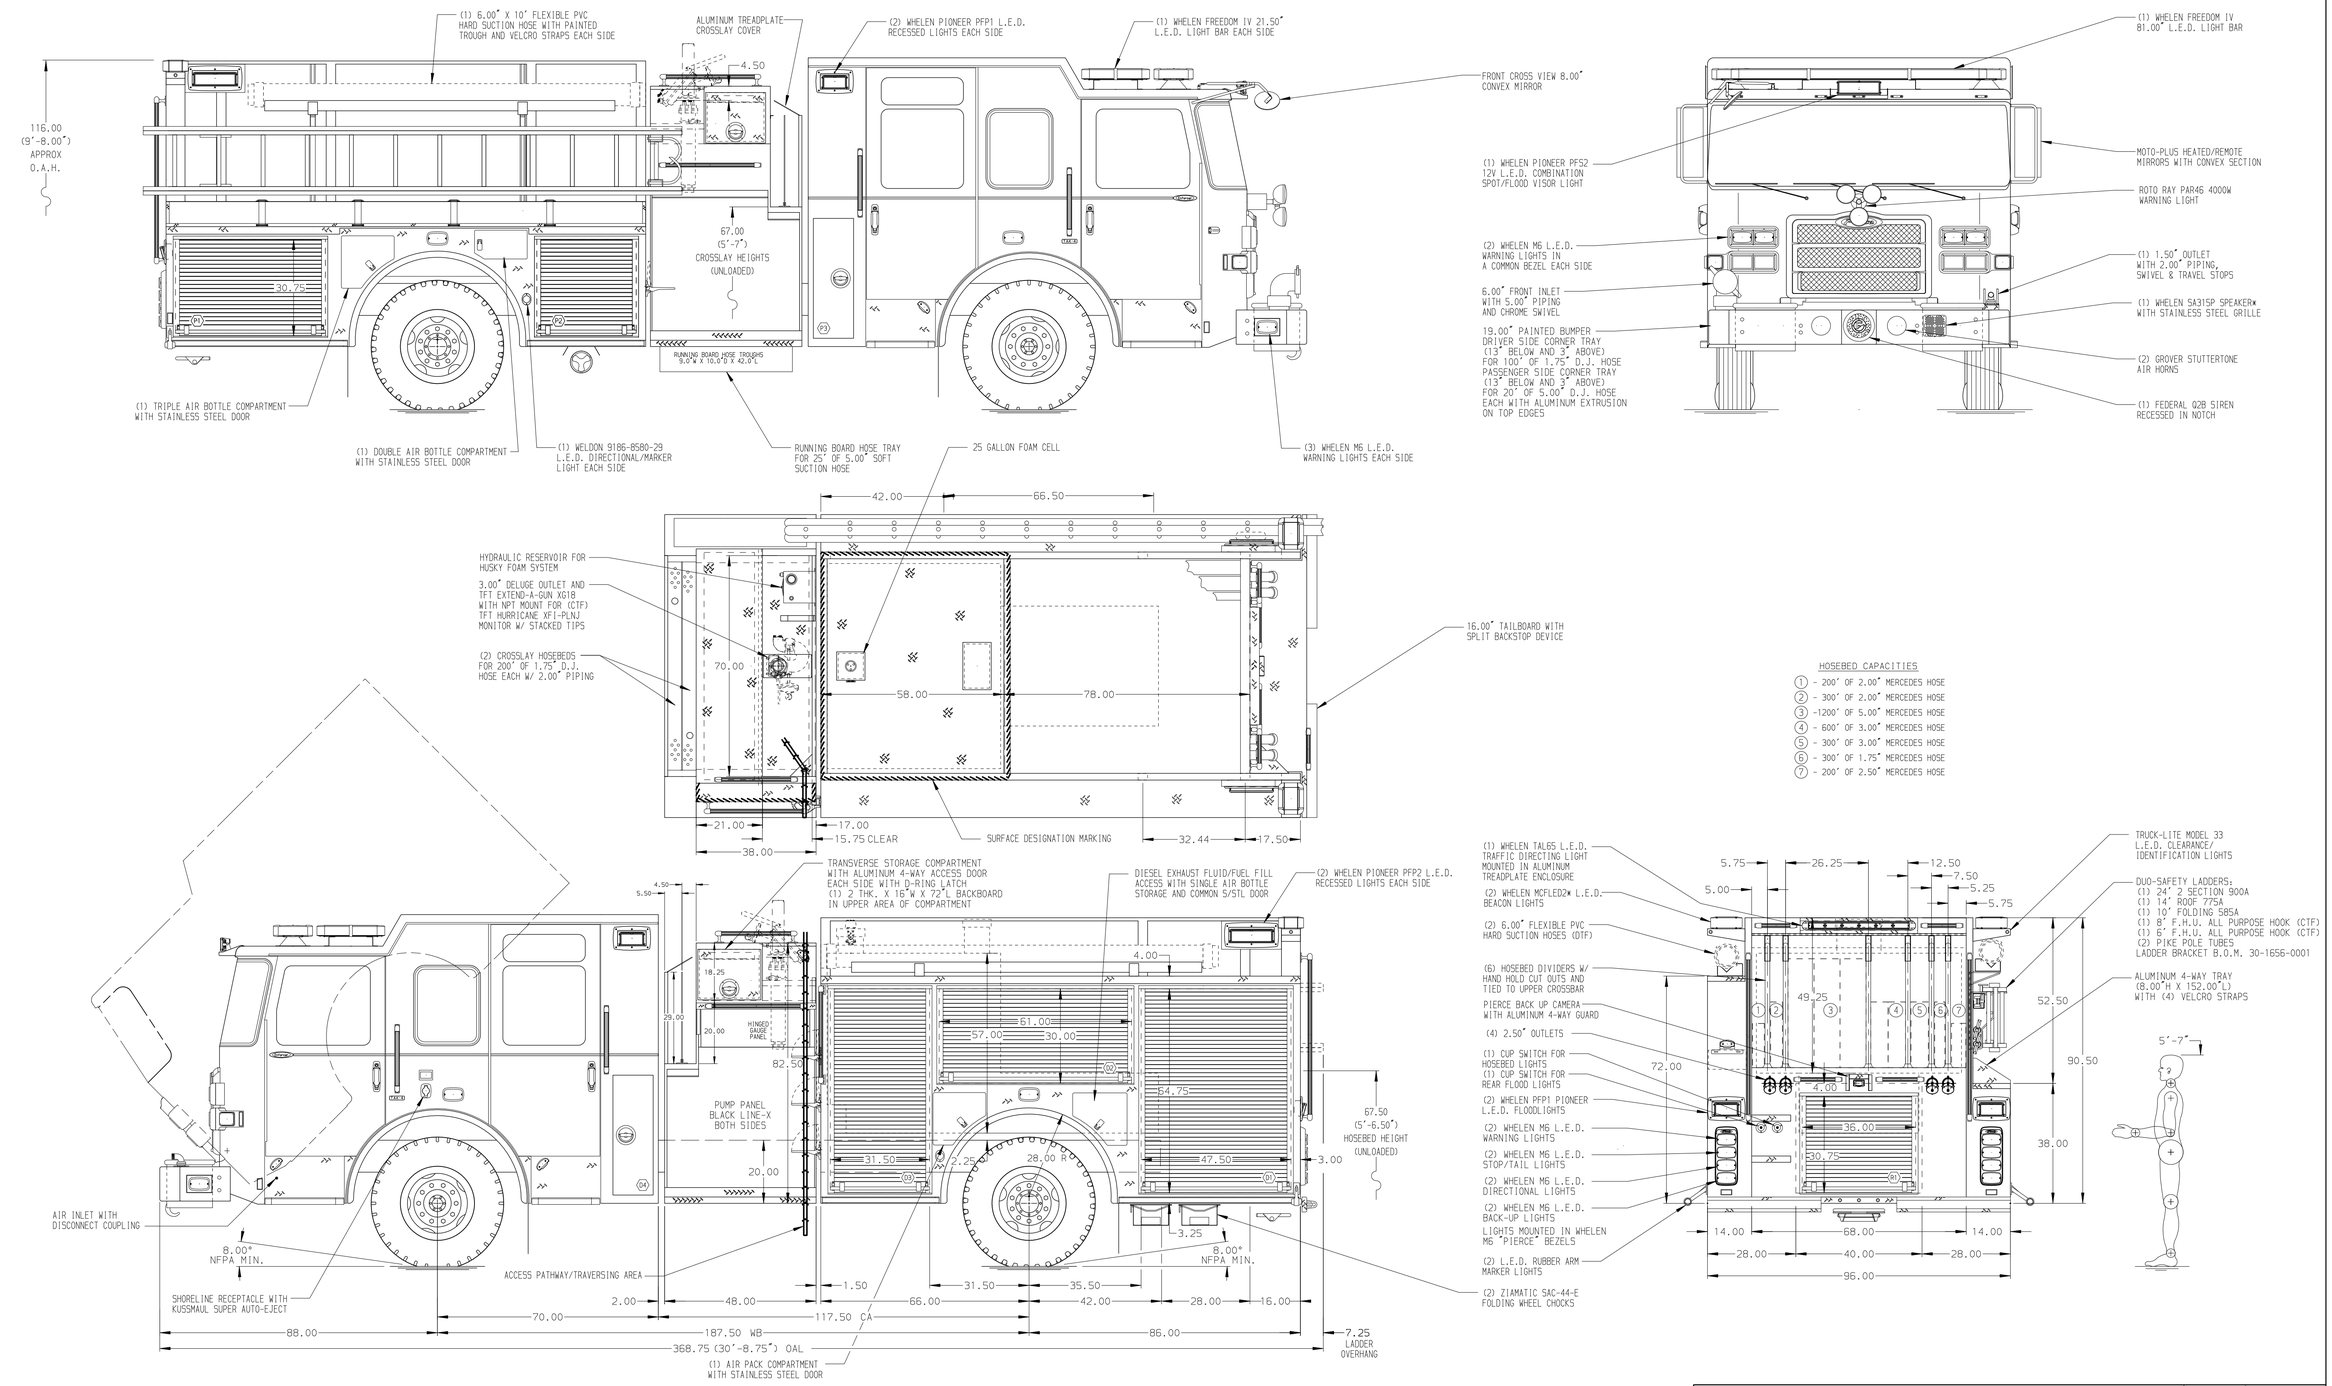

HOSEBED CAPACITIES

1. - 200' OF 2.00" MERCEDES HOSE
2. - 300' OF 2.00" MERCEDES HOSE
3. -1200' OF 5.00" MERCEDES HOSE
4. - 600' OF 3.00" MERCEDES HOSE
5. - 300' OF 3.00" MERCEDES HOSE
6. - 300' OF 1.75" MERCEDES HOSE
7. - 200' OF 2.50" MERCEDES HOSE

ALUMINUM BODY | MAXIMUM O.A.L. 370.00" | MAXIMUM O.A.H. 116.00" | SIDE ROLL AND FRONTAL IMPACT PROTECTION

Pierce MANUFACTURING INC.

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
3. DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED ON EACH ROLL UP DOOR
4. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT R1
5. ONE DRAIN HOLE WITH SPLASH GUARD LOCATED IN COMPARTMENTS D1, D3, (2) IN R1, P1 & P2
6. PARTITION BETWEEN COMPARTMENTS D1/R1 AND P1/R1
7. ALUMINUM PEGBOARD WITH TRACKS ON THE REAR WALL OF COMPARTMENTS D3, D1, AND D2
8. ONE 500LB ADJUSTABLE SHELF LOCATED IN D1 AND D3
9. ONE 500LB FLOOR MOUNTED SLIDE-OUT TRAY LOCATED IN R1
10. (2) SHORELINE RECEPTACLES ON REAR WALL OF COMPARTMENT D1, JUST BELOW TRANSISTION

REV	DATE	BY	CH
V	27FEB17	GVH	DTS
V	19DEC16	GVH	DTS
V	11NOV16	GVH	DTS
V	030CT16	GVH	CSH

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

TITLE: 1500-D-750P, W/ 25G FOAM, 152" BODY, FULL HEIGHT/LOW SIDE CONTROL, (2) X-LAYS, LADDERS ON SIDE, A/C
FOR: SWATARA TOWNSHIP, SWATARA, PENNSYLVANIA
DWG NO.: 30601AD

JOB NO.	30601
SCALE	1:24
DATE	
DRAWN BY	GVH
	20SEP16
CHECKED BY	CSH
	21SEP16
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 28-FEB-2017 06:50:30