


COMBINE4™

IEM Transmitter Combiner

The COMBINE4 UHF transmitter combiner actively combines signals from up to four in-ear monitor transmitters into a single transmitting antenna, reducing clutter, signal interference, and lowering the probability of intermodulation artifacts.

Included Accessories

- (4X) BNC Jumpers
- (4X) DC Cables
- (1X) AC Cables

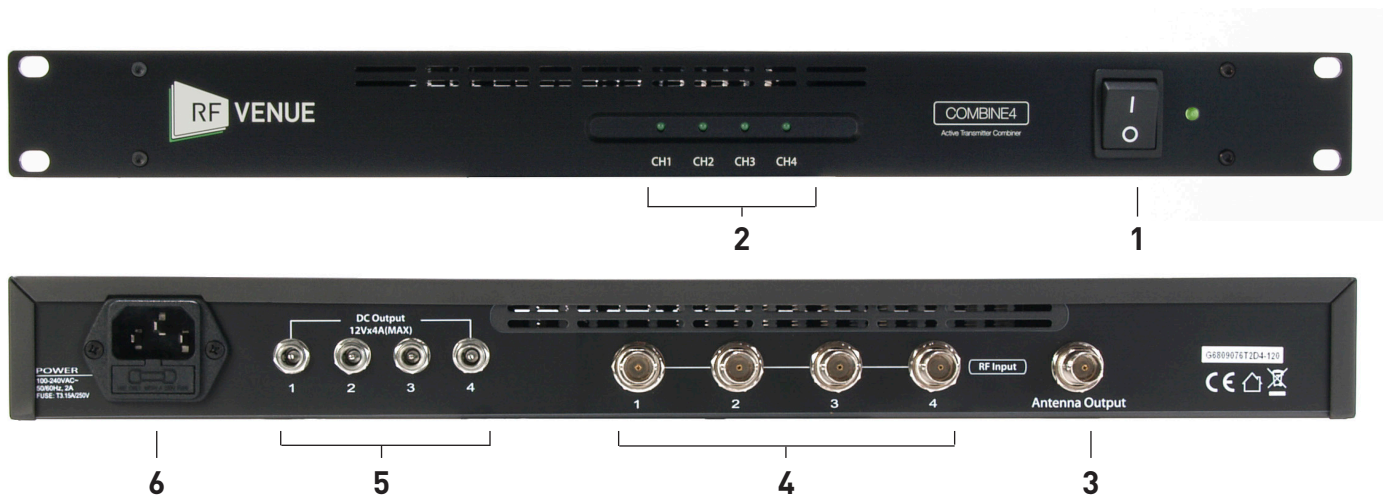

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. Power switch 2. Signal indicator 3. Antenna output | <ol style="list-style-type: none"> 4. BNC transmitter inputs 5. DC output jacks 6. AC power input |
|---|--|

Specifications

Frequency range	470-960 MHz
Input connectors	4X BNC
Full system gain	0 dB (±2 dB)
Maximum RF input power	+20 dBm (100 mW)
LED indicator (input signal threshold) ..	> +5 dBm (Threshold power)
Power consumption	60 W
I / O	4X RF inputs. 1 antenna out. 4 DC outputs.
Input AC voltage	100-240 VAC, 50/60 Hz, Max 2A
Output DC voltage	+12 V. 1 A max (4 outputs total 48 W)
Dimensions	480(W) X 45(H) X 260(D) mm
Weight	2.3 Kgs

WARNING

- Do not expose this appliance to heat or moisture.
- To avoid shock, do not remove cover. Refer all service to qualified service personnel or distributors.