


Manufacturers of Reliable
SRS Crisafulli Products

Dredges—Pumps—Power Units

Supported by Superior
Service

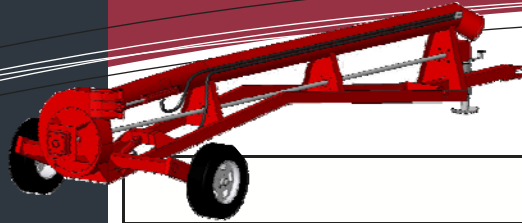

PTO Powered Slurry Pumps

Capabilities

Mixing Rate—up to 10,000 GPM
Pumping—up to 9,000 GPM @ 20' TDH
Nozzle discharge up to 105 feet
Operator can control functions remotely from tractor cab for greater convenience.
Hydraulically adjustable aeration nozzle to distribute nutrients evenly and to clear overgrown areas
Rugged platform for increased versatility and long life



Nozzle adjusts to 74 degrees of vertical movement and 320 degrees of rotation.

**Call for a free
Specification & Quote
800-442-7867**



A hydraulically controlled lift axle with a 7 foot lift

SRS Crisafulli, Inc.
1610 SRS Crisafulli Drive
PO Box 1051
Glendive, Mt 59330

800-442-7867
406-365-3393
Fax: 406-365-8088

SRSC@Crisafullipumps.com
www.crisafullipumps.com

Features

	Standard Slurry	Manure Monster
Hydraulically actuated slurry gate	♦	♦
A 7 foot wide single wheel base	♦	
An 8 foot wide double wheel base		♦
Stabilizer wheel arm to eliminate side shift and tipping while slurring.		♦
Extended discharge pipe for easy hose connections.	♦	♦
Patented bearing protection system protects submerged shaft	♦	♦
Remote lube lines enable operator to grease bearings while operating	♦	♦
Swing out control valve moves operator away from rotating PTO shaft	♦	♦
Hydraulically controlled lift axle	3 foot	7 foot
Hydraulically adjustable aeration nozzle distributes nutrients evenly to clear overgrown areas		♦
Discharge nozzle adjusts to 74 degrees of vertical movement and 320 degrees of rotation		♦
Articulation base hitch increases freedom of movement.	♦	♦

Product Comparison

Feature	SRS Crisafulli	Houle	Nuhn	Jamesway
Slurry Gate	Yes	No	No	No
Factory Direct Customization	Yes	No	No	No
Elimination of Gear Box	Yes	No	Yes	No
Operable at Full RPM	Yes	No	No	No



Slurry and clean a 200 X 200 foot 8-foot deep pond in 6 hours.

Call toll-free:

800-442-7867

Email us:

SRSC@Crisafulli.com

Visit our website:

www.crisafullipumps.com



SRS Crisafulli specially engineered Slurry Gate

SRS Crisafulli, Inc.

1610 SRS Crisafulli Drive

PO Box 1051

Glendive, MT 59330


800-442-7867

406-365-3393

Fax: 406-365-8088

SRSC@Crisafullipumps.com

www.crisafullipumps.com

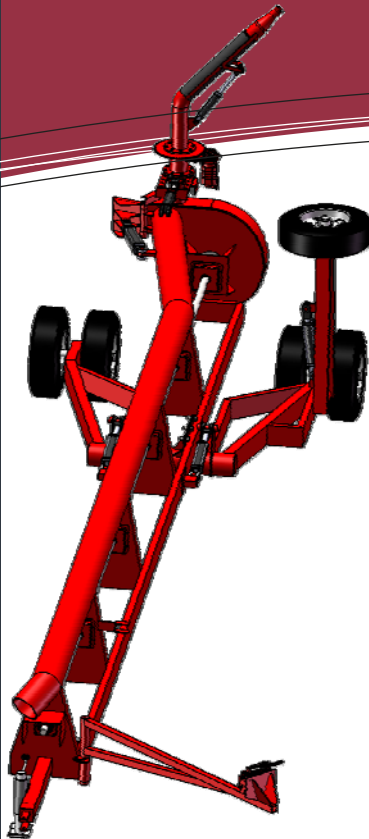

PTO Powered Slurry Pumps

Applications. Agitate, mix and pump most viscous or solidified sludges from industrial, municipal and agricultural waste lagoons with a SRS Crisafulli slurry pump. The pumps also work well for refineries, municipalities and geothermal plants.

Productivity. An operator can slurry and clean a 200 X 200 foot 8-foot deep pond in 6 hours with a SRS Crisafulli slurry pump

Mixing rates up to 10,000 gallons per minute. Pumping rates up to 9,000 gallons per minute.

Our most modern technology. Today's SRS Crisafulli PTO Powered Slurry Pump is our latest version after 40-years building efficient, rugged, long lasting slurry pumps to clean agricultural waste pits. Standard models include pump discharge sizes of 4, 6, 8, 12, and 16 inches

Simple. Just back your SRS Crisafulli Slurry Trailer Pump into a lagoon, engage the 540 or 1000 RPM PTO of your tractor or Power Unit, then slurry and pump.

Operation of the Slurry Pump. *SRS Crisafulli has engineered its Slurry Pump with a "Slurry Gate" which the operator opens to agitate, mix, and slurry the pond.* The submersible centrifugal pump draws solids and liquids into the pump, blends and discharges the material through the slurry gate. The operator closes the slurry gate hydraulically and pumps the material at high volume out of the lagoon to a receiving tank, receiving vehicle or to another lagoon.

No separate agitator or mixer pumps are needed.

Quality and Reliability Standards. SRS Crisafulli builds its pumps to industrial standards from heavy structural steel tubing, and builds its casing material and impellers from 3/8" steel plate, for long, useful lives even in abrasive environments.

The pumps lead their class compared to lighter, less efficient lagoon pumps.

- SRS Crisafulli slurry pumps agitate, blend and pump millions of gallons of the thickest bentonite, fly ash, raw sewage or animal waste without damage to the pumps.
- SRS Crisafulli self-priming pumps have no screens, suction hose or check valves

Custom designs are offered when standard models don't serve the customer's needs.

Call the Factory to discuss your application with one of our application engineers.

800-442-7867