


INSIDE-OUTLET GFCI RECEPTACLE W/ CIRCUIT BREAKER

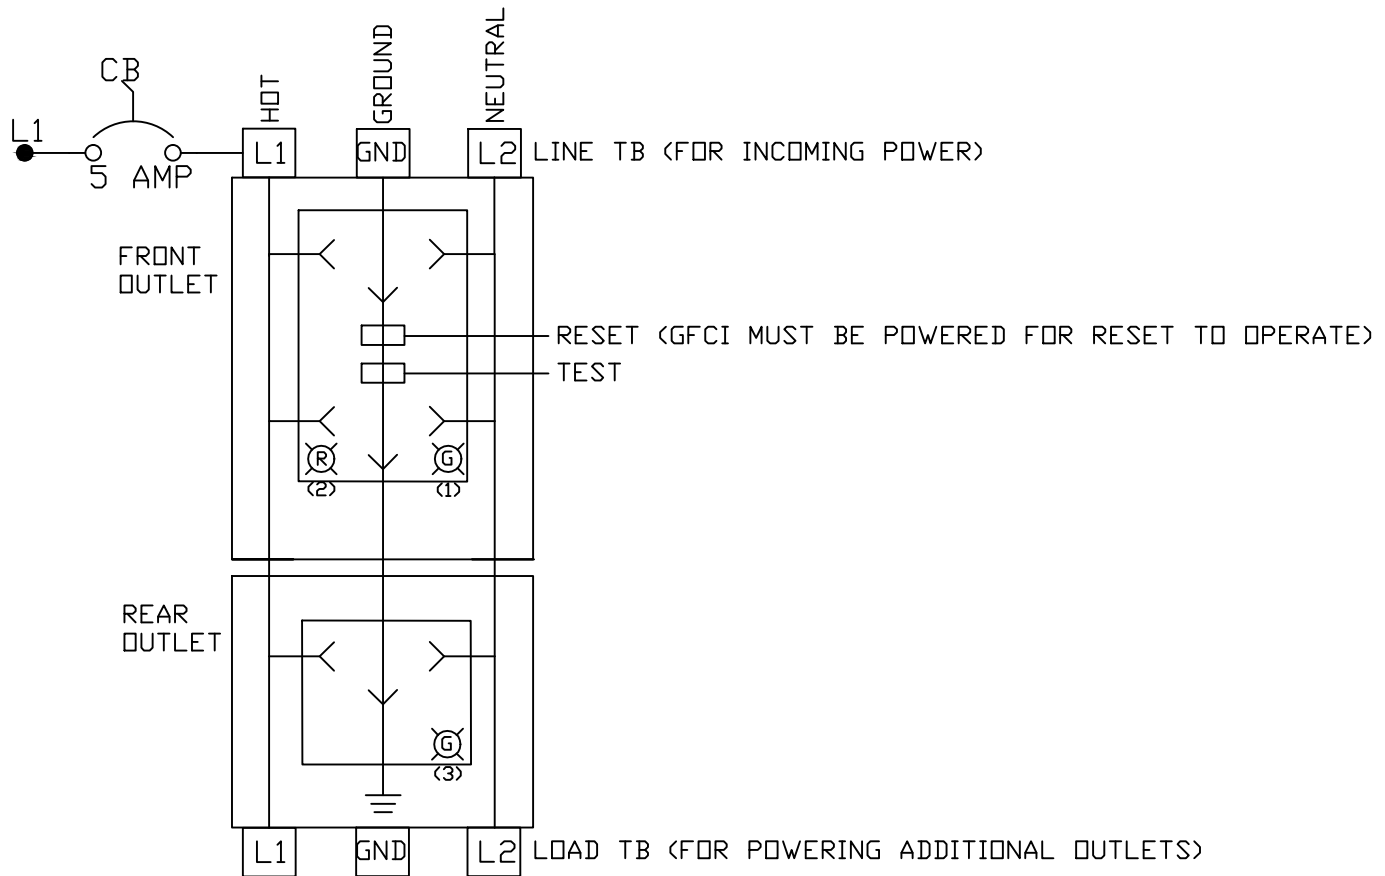

LED Indication Matrix	No incoming power or GFCI needs to be reset	Normal Function when powered	Potential normal Function when powered	GFCI needs to be replaced
Front Green ⁽¹⁾	Off	Steady On	Steady On	Steady On
Front Red ⁽²⁾	Off	Off	Steady On	Flashing
Rear Green ⁽³⁾	Off	Steady On	Steady On	Steady On

Electical Characteristics	Current Rating (A)	Operating Voltage (Max)	Interrupt Capacity
GFCI (front) Outlet	20	125 VAC	4-6 mA
Simplex (rear) Outlet	15	125 VAC	N/A
Circuit Breaker	5	250 VAC or 32 VDC	1,000 (A) @ 250 VAC or 32 VDC

NOTE:

- 1) REFER TO INSTALLATION INSTRUCTIONS FOR PROPER INSTALLATION.
- 2) ALWAYS FOLLOW LOCAL ELECTRICAL CODES.
- 3) FOR DETAILED SPECIFICATIONS SEE DATA SHEETS THAT APPLY.
- 4) HOUSING INSERT COMPONENT LOCATIONS ARE APPROXIMATE.
- 5) HOUSINGS ARE UL RECOGNIZED TYPE 4X OTHER ENVIRONMENTAL RATINGS MAY APPLY.
- 6) FINAL ASSEMBLIES: UL RECOGNIZED, CSA, AND CE MAY APPLY CONSULT FACTORY.

Warning: Verify an electrical conductor has been de-energized using an adequately rated test equipment before working on it. Follow appropriate Energy Control (Lockout/Tagout) procedures as per OSHA Subpart S; the current edition of NFPA 70E; and the current edition of CSA Z462.

GracePort(R) and SafeSide(R) are Registered Trademarks of Grace Engineered Products, Inc. Property of Grace Engineered Products, Inc. (Drawings are subject to change without notification)