



**Title: Fire Test Results**

**Product: 1" Envirocoustic Wood Wool with 2" CFAB Backer**



Application: Wall or Ceiling

Testing Standard: NFPA 286

Test Date: 10/03/2018

*Why this test:* This aggressive test evaluates the contribution of a wall or ceiling assembly to room fire growth. A flame is held in the corner of small room, furnished with the product, for 15 minutes, and the intensity is increased four times after the first 5 minutes. During the test, multiple criteria are evaluated, and the product is given a pass/fail classification.

Test Result Summary: Passed

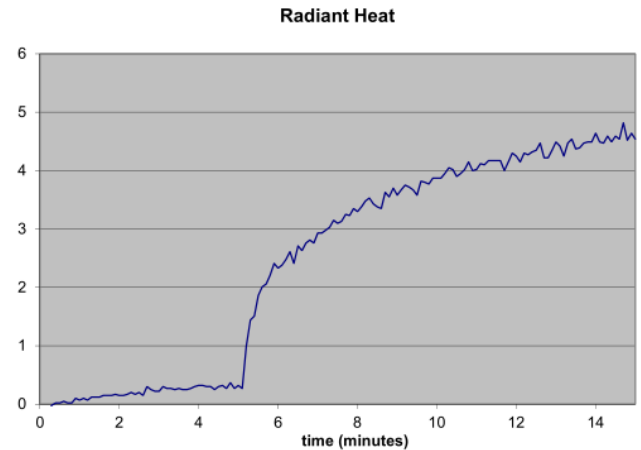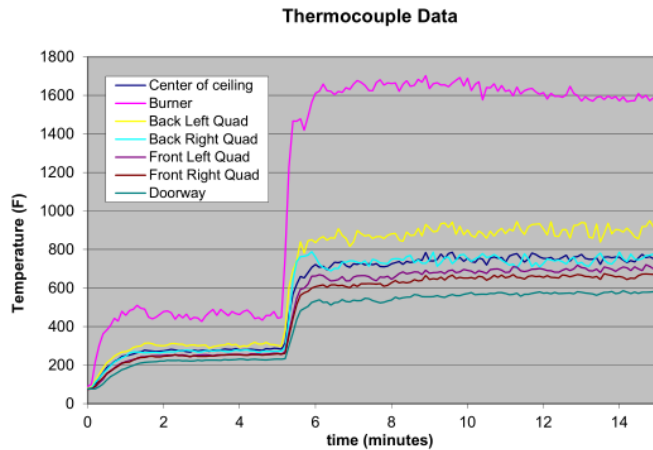

Test ID: 103666408SAT-001R1

**ASI TEST RESULT DISCLAIMER**

ASI makes every effort to ensure the accuracy and reliability of the information provided. Laboratory testing is conducted by independent testing organizations. ASI does not guarantee that field tests or independent tests will not vary.

# ASI FIRE TEST REPORT

**SCOPE OF WORK**

NFPA 286 TESTING ON CEMENTITIOUS WOOD FIBER ACOUSTICAL BOARD WHEN INSTALLED ON INTERIOR WALLS AND CEILING

**REPORT NUMBER**

103666408SAT-001R1

**TEST DATE(S)**

10/03/18

**ISSUE DATE**

10/04/18

**REVISED DATE**

10/22/18

**RECORD RETENTION END DATE**


10/03/28

**PAGES**

20

**DOCUMENT CONTROL NUMBER**

ATI 00766 (11/06/17)

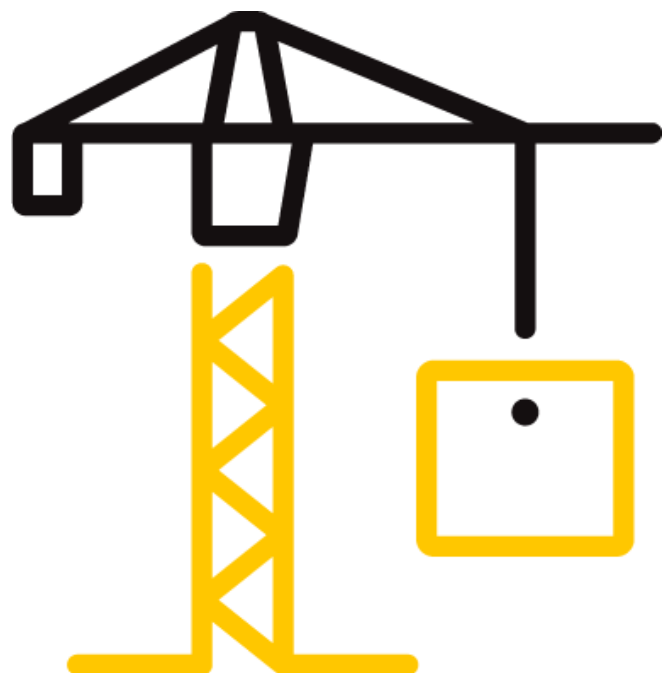

## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

### REPORT ISSUED TO

ASI  
123 Columbia Court N  
Chaska, MN 55318

### SECTION 1

#### SUMMARY

Intertek Building & Construction (B&C) was contracted by **ASI; 123 Columbia Court N, Chaska, MN 55318** to evaluate the contribution of wall and ceiling interior finish to room fire growth of an assembly containing CEMENTITIOUS WOOD FIBER ACOUSTICAL BOARD. Results obtained are tested values and were secured by using the NFPA 286 test method. A summary of test results is reported herein and the complete graphical test data is included in this report.

**Product Type: Cementitious wood fiber acoustical board, Cellulose, Z-track**  
**Series/Model: NA**

#### Summary of NFPA 286 Test Results

The assembly described and tested in this report **did** meet the requirements of acceptance criteria for interior wall or ceiling finishes of 2015 International Building Code Section 803.1.2.1 and NFPA 286 Annex C. Construction summary of the full assembly is located in Section 5 of this test report.

For INTERTEK B&C:

<b>COMPLETED BY:</b>	Troy Bronstad	<b>REVIEWED BY:</b>	Herbert W. Stansberry II
<b>TITLE:</b>	Test Engineer – Fire Testing	<b>TITLE:</b>	Engineering Supervisor
<b>SIGNATURE:</b>		<b>SIGNATURE:</b>	
<b>DATE:</b>	10/04/18	<b>DATE:</b>	10/19/18

This report is the exclusive property of Intertek B&C's Client so named herein and is provided pursuant to the agreement between Intertek B&C and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report does not constitute certification of this product nor an opinion or endorsement by this laboratory. This report and related test records that are retained such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation will be serviced by Intertek B&C for the entire test record retention period.

## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

### SECTION 2

#### TEST METHOD

The assembly was evaluated in accordance with the following:

**NFPA 286-15**, *Standard Methods of Fire Tests for evaluating Contribution of Wall and Ceiling Interior Finish to Room Fire Growth*

**International Building Code (2015)**, *Chapter 8, Section 803.1.2.1*

### SECTION 3

#### TEST PROCEDURE

A calibration test is run within 30 days of testing any material as specified in the standard. All instrumentation is zeroed, spanned and calibrated prior to testing. Testing was performed on 10/03/2018 in accordance with NFPA 286 test method. Ambient conditions prior to the initiation of the test were 75°F and 70% relative humidity. The specimen is installed and the ignition source is placed in a corner adjacent to the room opening. The ignition source for the test is a gas burner with a nominal 12 in. by 12 in. porous top surface of a refractory material. The burner used at this laboratory is filled with a minimum 4-inch layer of Ottawa sand. The collection hood exhaust blower is turned on and an initial flow is established. The gas sampling pump is turned on and the flow rate is adjusted. When all instruments are reading steady state conditions, the computer data acquisition system and video equipment is started. The gas supply to the burner is C.P. grade propane. The burner is capable of producing a gross heat output of 40±1 kW for five minutes followed by a 160±5 kW for ten minutes. The flow rate is metered throughout the test. The gas burners are controlled with mass flow meters to control the volume of gas to match the heat outputs of the standard. Ambient data is taken then the burner is ignited at a fuel flow rate that is known to produce 40 kW of heat output. This level is maintained for five minutes at which time the fuel flow is increased to the 160 kW level for a 10-minute period. During the burn period, all temperature, heat release and heat flux data is being recorded every 6 seconds. Physical flame propagation observations are recorded by the technician in conjunction with the test data. At the end of the fifteen minute burn period, the burner is shut off and all instrument readings are stopped. Post-test observations are made and this concludes the test. All observations are recorded in the table located in Section 6.

#### Material Source/Installation

The Cementitious wood fiber acoustic board was received directly from client. Samples were not independently selected for testing. Samples were received on 09/07/18 and received Intertek ID#SAT1809071037-001-002.

## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

### SECTION 4

#### LIST OF OFFICIAL OBSERVERS

NAME	COMPANY
Conor Cook	ASI
Troy Bronstad	Intertek Testing
Tony Jimenez	Intertek Testing
Duane Scribner	Intertek Testing

### SECTION 5

#### TEST ASSEMBLY DESCRIPTION

The interior dimensions of the floor of the fire room, when the specimens are in place, measures 8 ft, by 12 ft. The finished ceiling is 8 ft ± 0.5 in. above the floor. The four walls are at right angles defining the compartment. The compartment contains a 30 in. wide (± ¼ in.) by 80 in. high (± ¼ in.) doorway, centered in the 8 ft by 8 ft wall on the edge of the hood calorimeter apparatus. No other openings are present to allow ventilation. Below is a detailed description of the assembly:

##### **Gypsum, Cement board Cladding**

The full interior surfaces of the wall assemblies were clad with 5/8 in. thick gypsum board. The gypsum board was fastened to the wall framing with self-drilling screws at a nominal spacing of 8 in. around the board perimeter and 12 in. in the field. Drywall orientation was with the run edge parallel to the framing and the cut edge perpendicular to the framing. All joints were spackled with joint compound.

##### **Framing**

The test room walls and ceiling were constructed with 2x4 wood studs and joists, spaced every 24 in.

##### **Interior Finish**

20 Gauge 2 in. web Z-Furring was fastened to base room with 1-5/8 in. self-drilling screws spaced 24 n. oc. Running horizontal on walls and parallel to side walls on ceiling. Cellulose Fiber Acoustical Board 2 in. thick 3 LB 2 ft x 4 ft natural color panels were installed in Z-Furring cavities. Square edge cementitious small strand wood fiber panels with a clear primer finish, 1 in. thick 23-3/4 in. x 95-1/2 in., were attached to Z-Furring using #6 1-7/8 in. self-drilling screws with 1 in. washers. See drawing in section 8 for details.

## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

### SECTION 6

#### TEST RESULTS

**Test Date: 10/03/2018**

**Lab Temperature: 75°F**

**Lab Relative Humidity: 70%**

TEST OBSERVATIONS	
Time (Min:Sec)	Observations
00:00	Ignition of the burner. Heat output set at 40kW
00:33	Discoloration on back wall
00:44	Flame tips 6ft vertically in corner above burner
00:55	Charring to 4ft vertically in corner above burner with light smoke
02:10	Charring to 5ft vertically in corner above burner
04:00	No change
05:00	Increase gas flow to 160kW
05:18	Charring on ceiling above burner
05:40	Horizontal charring 4ft on ceiling
07:00	No change
09:00	No change
011:00	No change
13:00	No change
15:00	Gas off – no ignition – small flame in cavity directly above burner

**TEST REPORT FOR ASI**

Report No.: 103666408SAT-001R1

Date: 10/04/18

2015 IBC SECTION 803.1.2.1 & NFPA 286 ANNEX C PERFORMANCE CRITERIA	TEST OBSERVATIONS	PASS/FAIL
During 40 kW exposure, flames should not spread to the ceiling.	Flames did not spread to the ceiling during the 40kW exposure.	<b>PASS</b>
During the 160 kW exposure, the interior finish should not spread to the outer extremity of the sample on any wall or ceiling	Flames propagation to the outer extremities did not occur during the 160kW exposure.	<b>PASS</b>
<p>During the 160 kW exposure, the interior finish should not flashover as defined by NFPA 286.</p> <ul style="list-style-type: none"> <li>•Peak Heat Release &gt; 1 MW</li> <li>•Floor Heat Flux &gt; 20 kW/m<sup>2</sup></li> <li>•Average Upper Layer Temperature &gt; 1,112°F</li> <li>•Flames exiting doorway</li> <li>•Auto ignition of Paper Target</li> </ul> <p>Flashover is considered to have occurred when any two of the above criteria were met during the test.</p>	<ul style="list-style-type: none"> <li>•Peak Heat Release = 223 kW</li> <li>•Max Floor Heat Flux = 4.82 kW/m<sup>2</sup></li> <li>•Max Average Upper Layer Temperature =773.42°F</li> <li>•No Flames exited doorway</li> <li>•The flashover indicators did not ignite.</li> </ul>	<b>PASS</b>
The peak rate of heat release throughout the NFPA 286 test should not exceed 800 kW.	The peak heat release rate was 223 kW	<b>PASS</b>
The total smoke released throughout the NFPA 286 test should not exceed 1,000 m <sup>2</sup> .	The total smoke released during the entirety of the test was 17.8m <sup>2</sup>	<b>PASS</b>

## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

### SECTION 6

### PHOTOGRAPHS

**Photo No. 1**  
**Pretest photo**



**Photo No. 2**  
**40KW fire exposure**





## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

Photo No.3

40kW



Photo No. 4

40kW



## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

Photo No. 5  
40kW



Photo No. 6  
160kW



## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

Photo No. 7  
160kW



Photo No. 8  
160kW



## TEST REPORT FOR ASI


Report No.: 103666408SAT-001R1

Date: 10/04/18

Photo No.9  
160kW



Photo No.10  
End of test

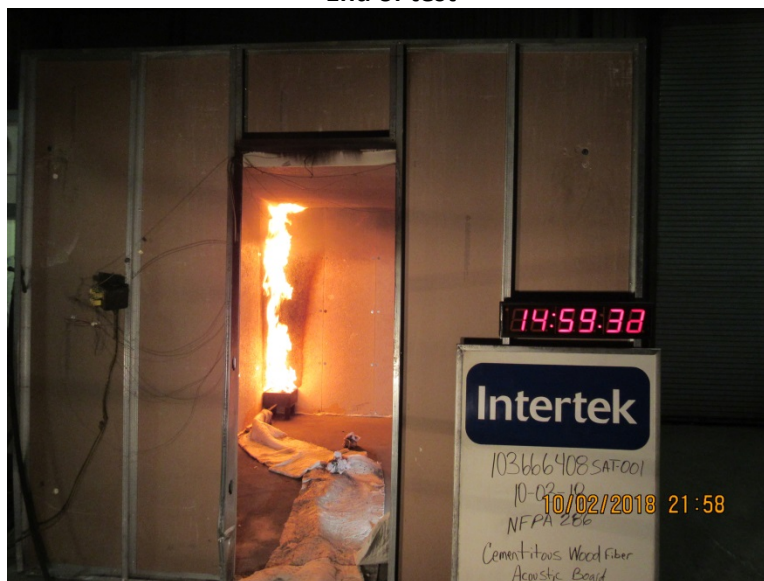

## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

**Photo No.11**  
**Post test**



**Photo No. 12**  
**Post test**



## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1


Date: 10/04/18

### SECTION 7

#### GRAPHS

Graph No.1

#### Thermocouple Data

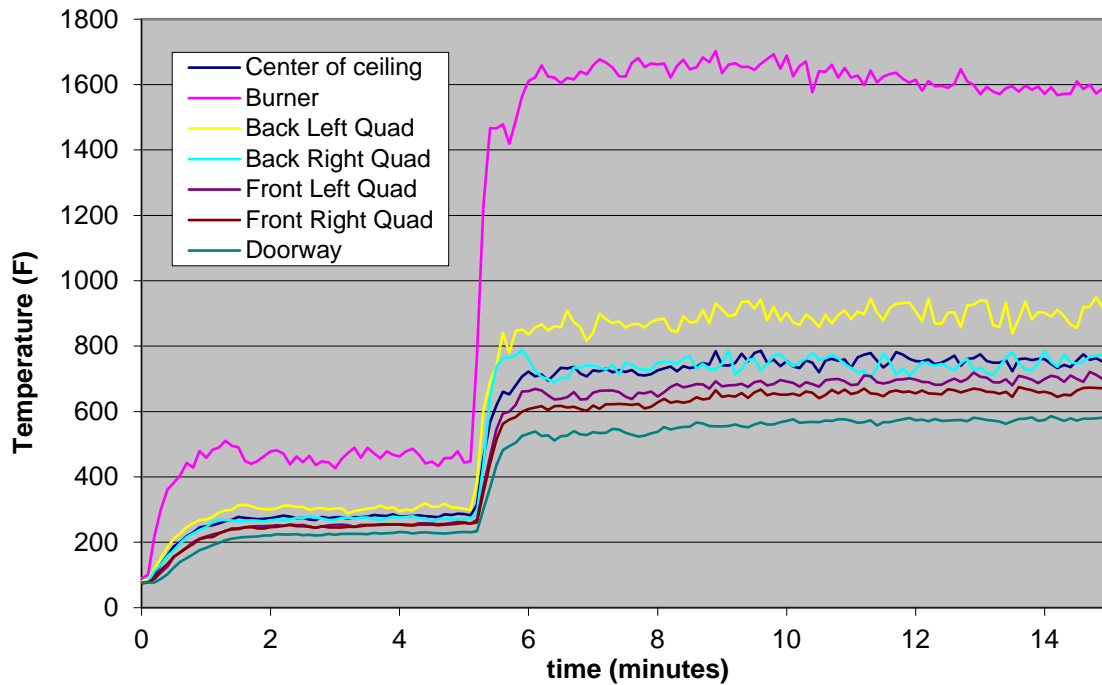


## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

Graph No. 2

### Smoke Release

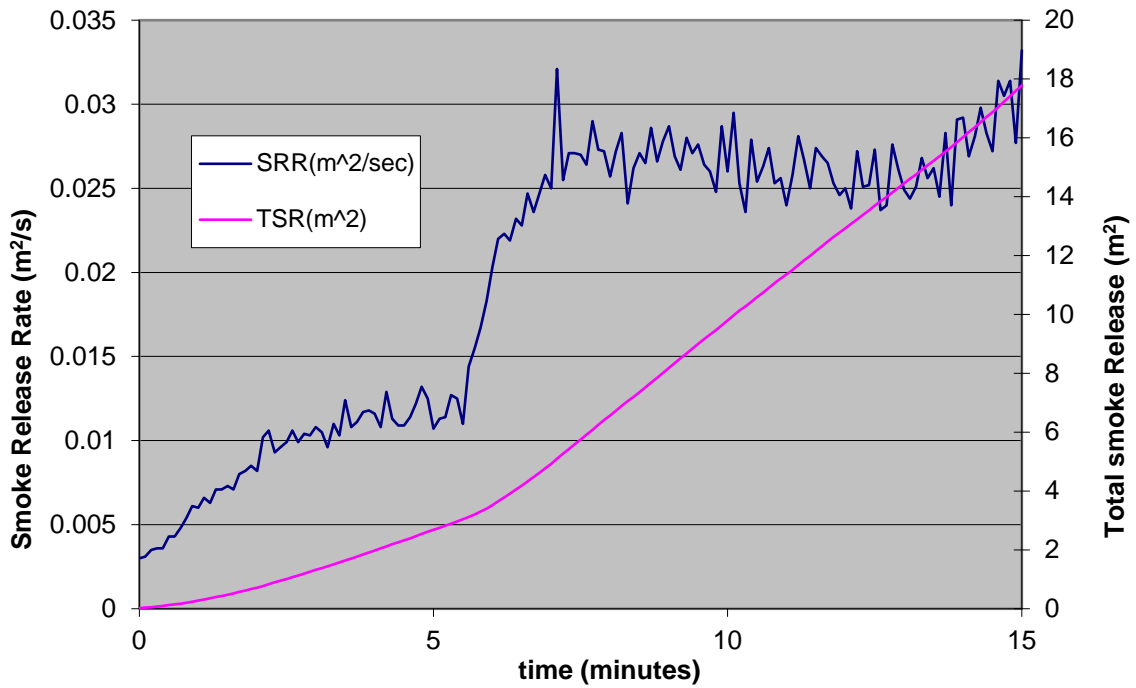


## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

Graph No. 3

### Heat Release

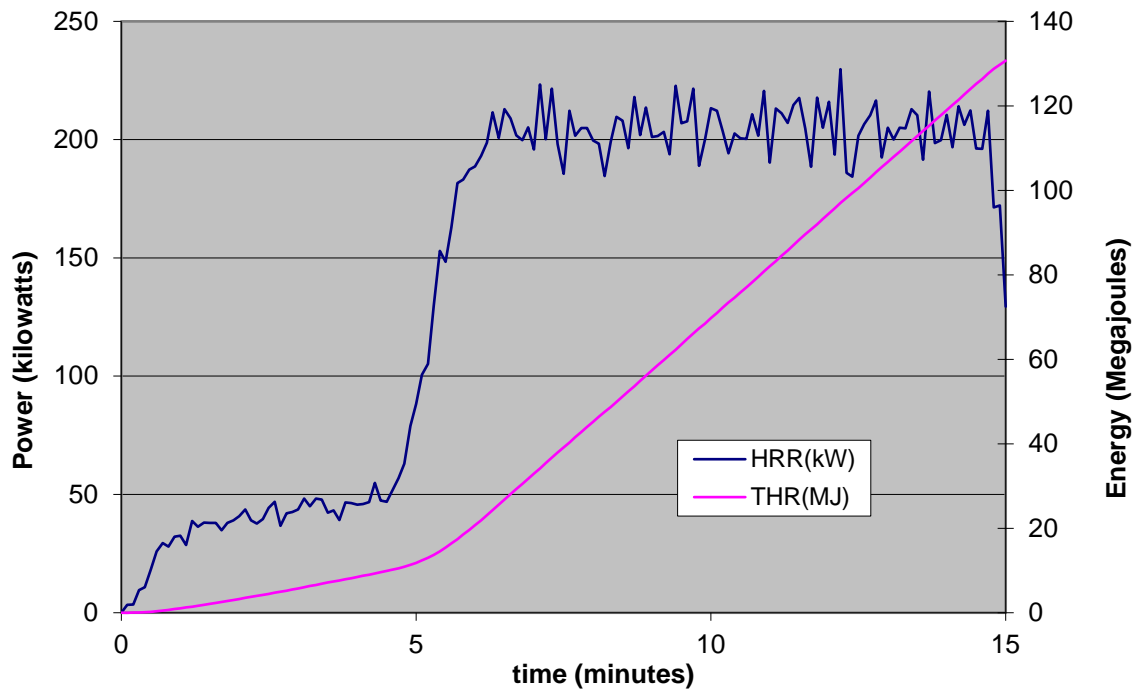




## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

Graph No. 4

### Radiant Heat

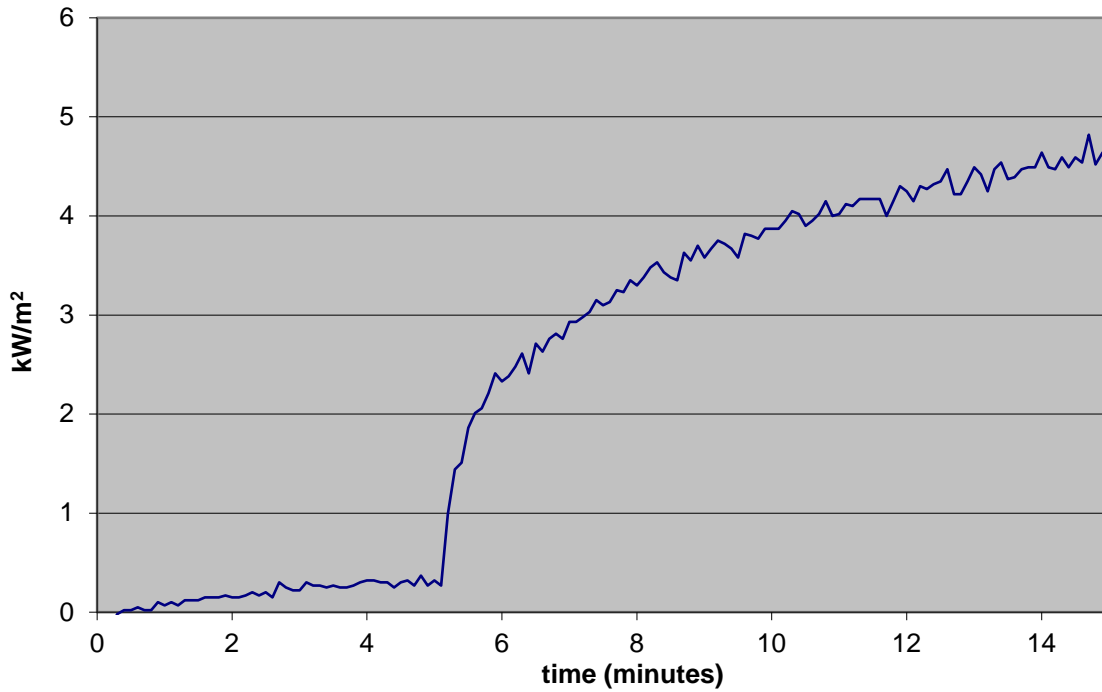


## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

### SECTION 8 DRAWINGS

#### TC LOCATIONS

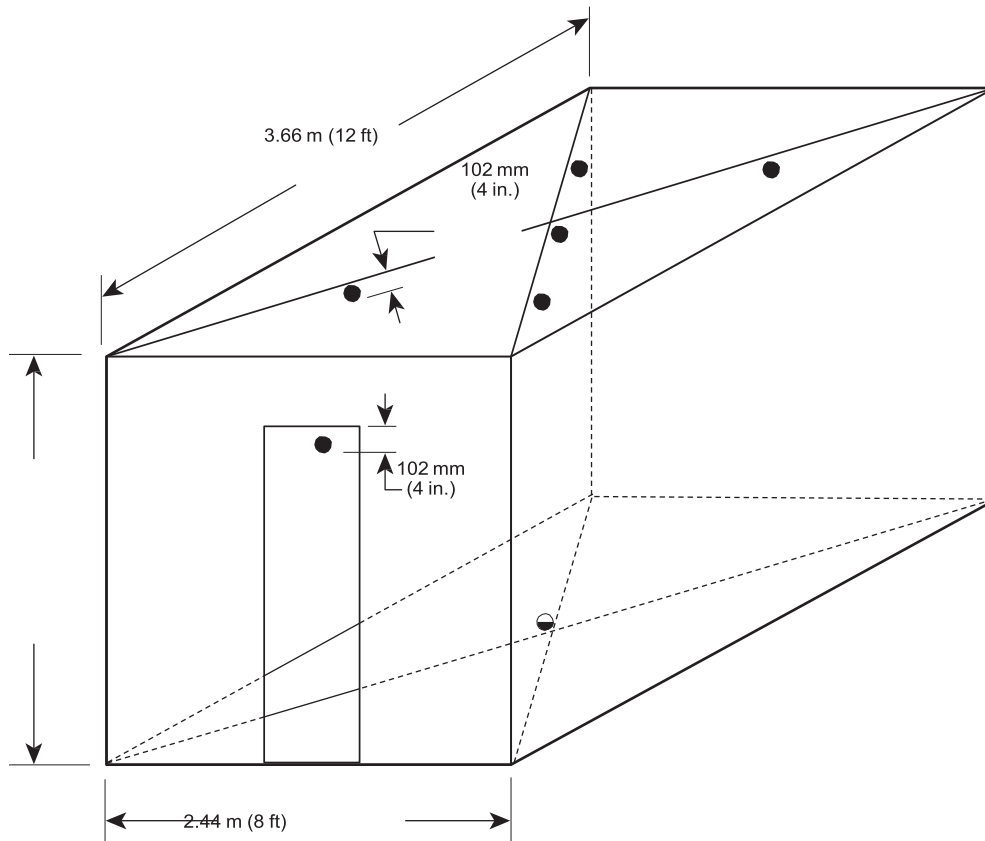


## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

### Install

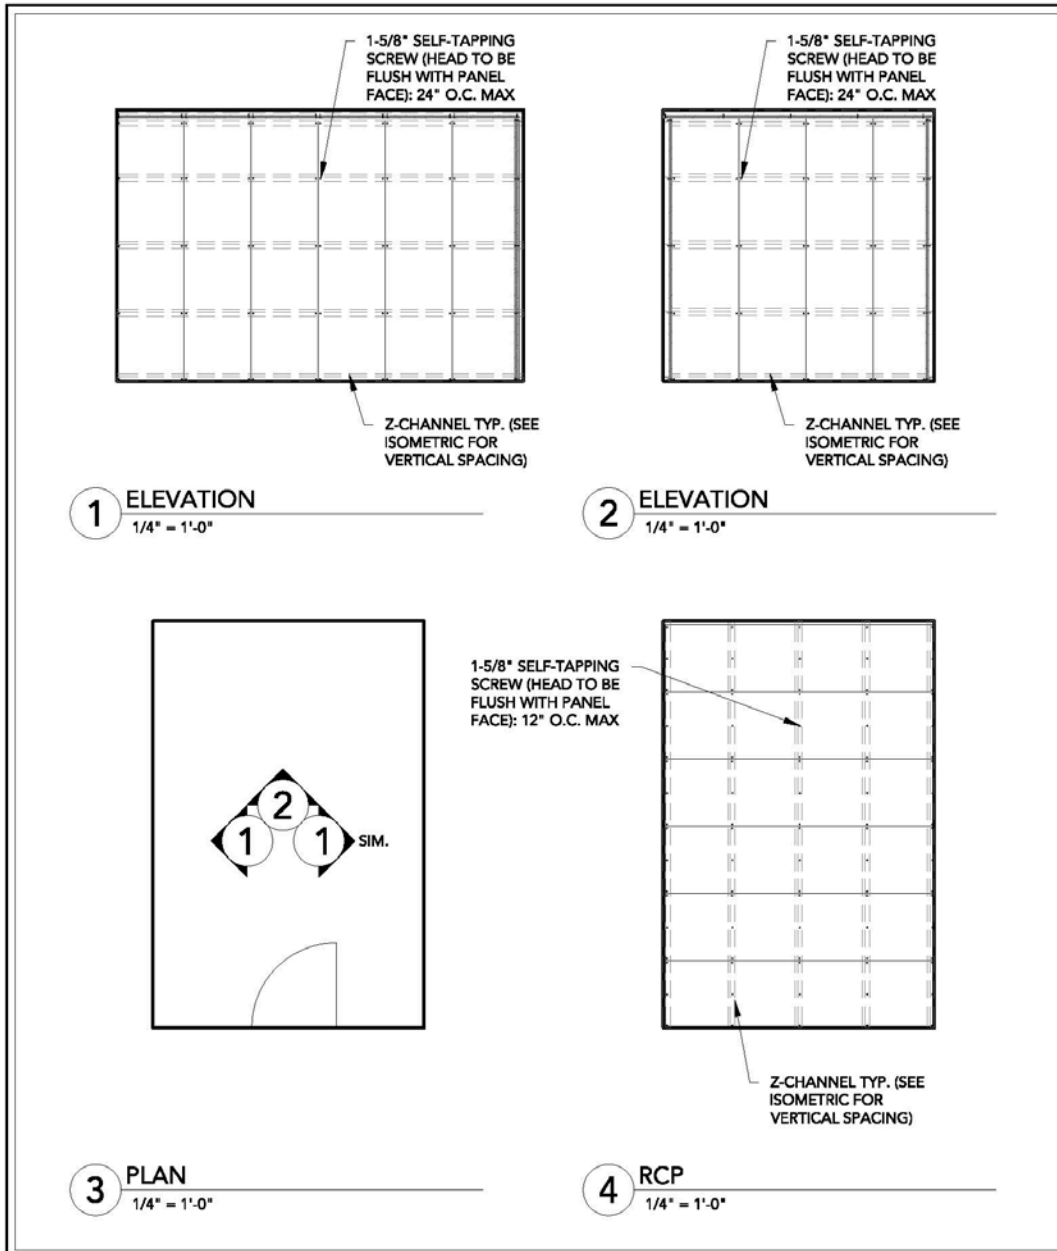

### FIRE TESTING ROOM PANEL LAYOUT

SCALE: 1/4" = 1'-0"

LAST REVISED: 10/11/2018


DRAWN BY: BMH

DO NOT SCALE DRAWINGS. MEASURE DIMENSIONS ARE TO BE FOLLOWED. READ THIS DRAWING IN CONNECTION WITH GENERAL ARCHITECTURAL, PLUMBING, STRUCTURAL, MECHANICAL, AND OTHER RELATED DRAWINGS. THESE DRAWINGS REPRESENT ASI'S UNDERSTANDING AND INTERPRETATION OF THE ARCHITECTURAL DRAWINGS AND HOW ASI PRODUCTS RELATE TO THE PROJECT. COPYRIGHT ASI © 2018

## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

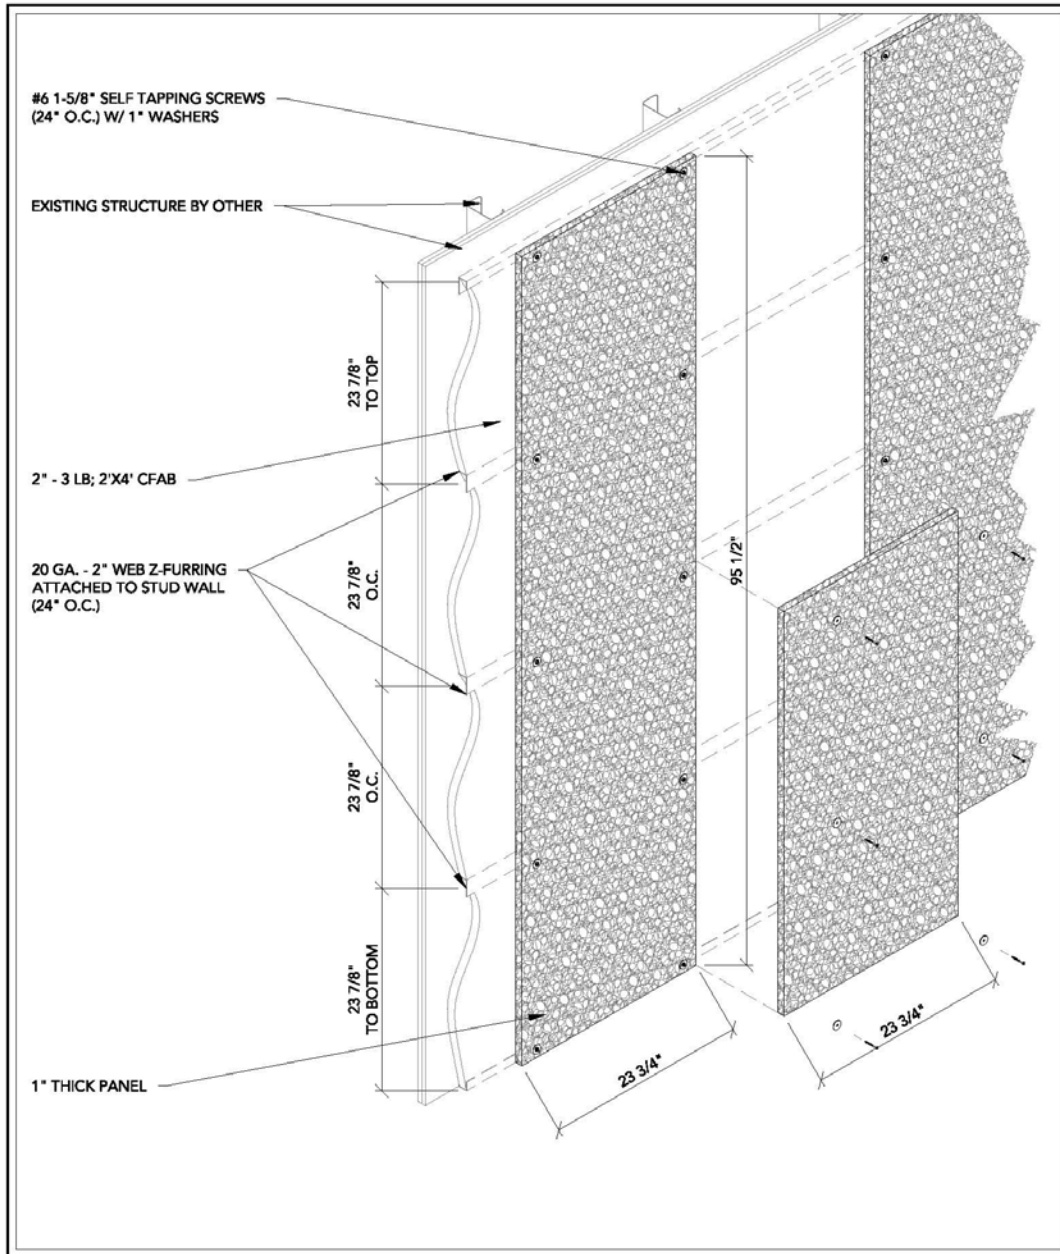

ISOMETRIC

SCALE: 3/4" = 1'-0"

LAST REVISED: 10/11/2018

DRAWN BY: BMH

DO NOT SCALE DRAWING. REQUIRED DIMENSIONS ARE TO BE FOLLOWED. READ THIS DRAWING IN CONNECTION WITH GENERAL ARCHITECTURAL PLANS, STRUCTURAL PLANS, AND OTHER RELATED DRAWINGS. THESE DRAWINGS REPRESENT ASI'S UNDERSTANDING AND PRESUMPTION OF THE ARCHITECTURAL, ENGINEER AND HOW AS PRODUCTS RELATE TO THE PROJECT. COPYRIGHT ASI, 2018

## TEST REPORT FOR ASI

Report No.: 103666408SAT-001R1

Date: 10/04/18

### SECTION 9

#### REVISION LOG

REVISION #	DATE	PAGES	REVISION
0	10/04/18	N/A	Original Report Issue
1	10/22/18	all	Changed the company name to ASI, in accordance with their company's corporate branding standards. 