



**Part #: 400CURB-MRC**

Added Options:

Metal Building Roof Curb with Loose Panel Ribs for Over/Over Panels at Existing or New Construction and Under/Under or Under/Over at New Construction.

**Standard Construction:**

One piece curb; insulated or non-insulated; 8" minimum height; 18ga. Galvalume steel shell and base plate; corners mitered and welded watertight; welds are micro-sealed and prime painted after fabrication; integral water diverter; loose panel ribs(R and SSR roof panels only).

- 1.
- 2.
- 3.
- 4.
- 5.



Project:

Match Roof Panel: \_\_\_\_\_


No. of Ribs under Panel each curb: \_\_\_\_\_




No. of Ribs over Panel each curb: \_\_\_\_\_

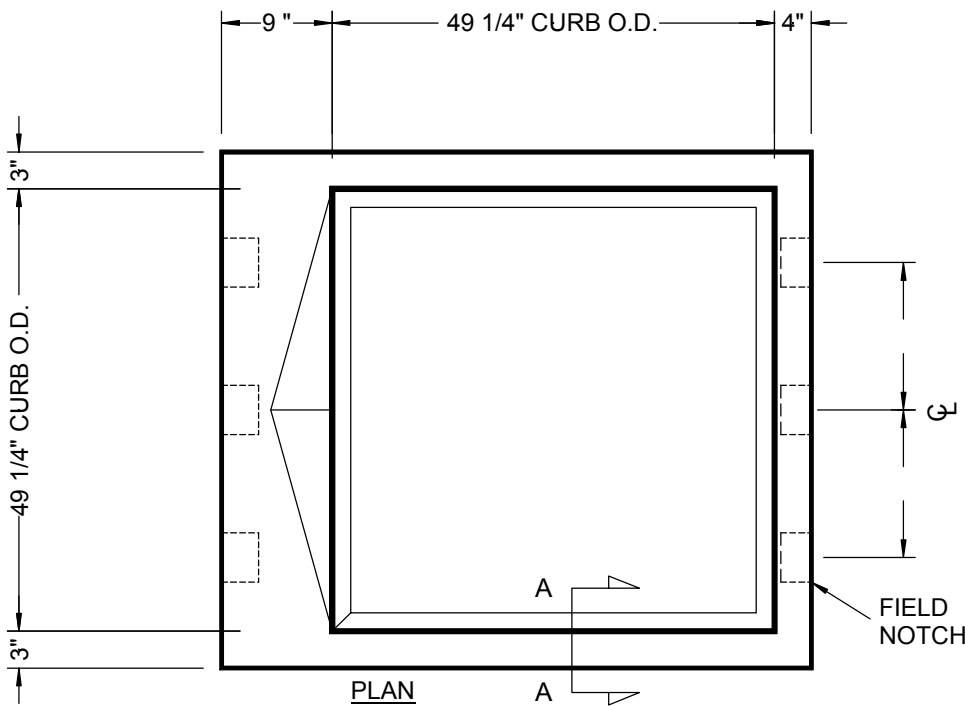


Check Box for Ins. or Non-ins.



SECTION A-A  
 INSULATED



SECTION A-A  
 NON-INSULATED

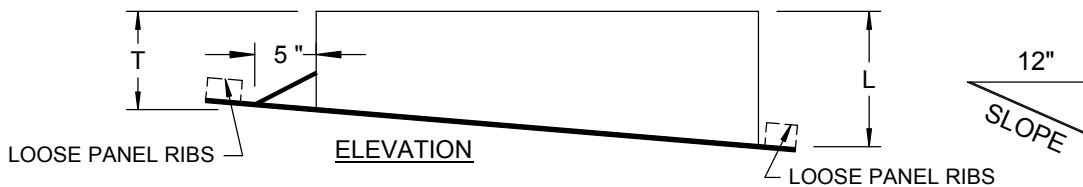

← Enter Slope

QTY.	I.D.	O.D.	T	L	TAG:
	46-1/2" x 46-1/2"	49 1/4" x 49 1/4"			