www.proelectricfireplaces.com

PRO Electric Fireplaces™
Builder • Developer • Specifier
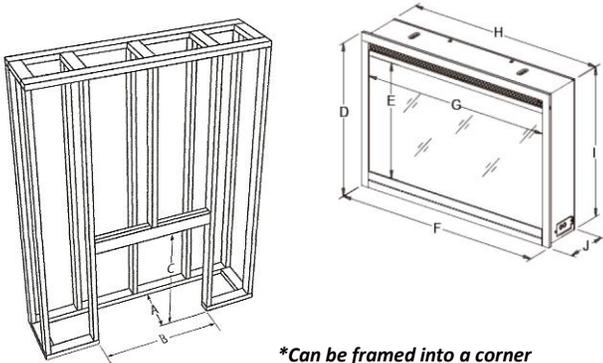A Division of Twin-Star International, Inc.

36" Builders Box - Linear
Contemporary - GRC Series

Flame color, Up-Lights, and Down-Lights can be set to one pattern, or by setting the "Auto" function, the unit will scroll through several color combinations

DIMENSIONS	36 W x 24 H x 7 5/8 D
Model No: GRC - 110v	36EB111-GRC
4400 BTU's	Fixed Tempered Glass Panel
Model No: GRC - 220v	36EB221-GRC
8900 BTU's	Fixed Tempered Glass Panel
FLAME STYLE	Contemporary
VIEWABLE AREA	33 1/2 W x 18 H

WIRING OPTIONS	
111-GRC: 3-Prong Plug or Hard Wired	**221-GRC: Hard Wired**
120 volts	240 volts
1440 watts	2800 watts
4400 BTU's	8900 BTU's
12 amps	11.7 amps

On-Screen Function Indicator

- Works from remote control or Wall Controler with Thermostat
- Function Indicator lights up when operated then automatically disappears after 5 seconds. Shows:
  1. Five Flame Brightness settings
  2. Heater Function activated
  3. Electronic Timer Function: Automatic Shut-Off from 30 minutes up to 9 hours

Standard Features

- Separate Models: 110v or 220v
- All LED Technology
- Includes Multi-Function Slim-Line Remote and a Wall Controller with Thermostat
- White and Clear Rocks in the flame bed
- Tempered Fixed Glass Panel
- Total Surround Flange - allows for flush mounting to drywall or other home finishes
- Integrated junction box for hardwire installations

Multi-Function Remote.

Wall mounted "Controller" includes Thermostat function

Can be framed into a corner

FRAMING & PRODUCT DIMENSIONS

A - 8"	B = 35"	C = 23 7/8	D = 24"	E = 18"
F = 36"	G = 33 1/2	H = 34 3/4	I = 23 5/8	J = 7 7/8

All "LED" Technology

- Provides the most "Realistic Flame Effect" in the industry
- 50,000+ Hours of out-put, equal to 5.7 years of continuous use

OPTIONAL "BUILDER MANTELS"
48" W x 42" H x 12" D

Traditional:

Transitional:

Contemporary: (shown)

Ships K/D
semi-gloss white

GREEN ATTRIBUTES

► **100% Energy Efficient:**
  Uses all of the input energy to operate the Flame Effect, Heat Output, or both
► **No Pollutants:**
  Carbon Monoxide, Dixode, or Mold
► **No Venting:**
  Does not break the building envelope
► **All "LED" Technology**
  Uses less energy than any other type of bulb

OPERATING COSTS
- Flame only = Less than 1¢ per hr
- 4400 BTU's = 14.4¢ per hr
- 8900 BTU's = 28¢ per hr

based on 10¢ per kWh

SUSTAINABLE FURNISHINGS COUNCIL MEMBER

U.S. GREEN BUILDING COUNCIL MEMBER

PRO Electric Fiireplaces is a division of Twin-Star International
©2011 Twin-Star International, Inc.

Twin-Star International, Inc ● 1690 S Congress Avenue, Ste. 210
Delray Beach, FL 33445 ● Tel: 888-776-2490 ● Fax: 561-330-3205