




Simultaneous Measurement of up to 16 Channels
Multipoint Heat Flow Meter

HFM-215N

Measure Anywhere. Compact and Light.
Portable Heat Flow Meter

HFM-201

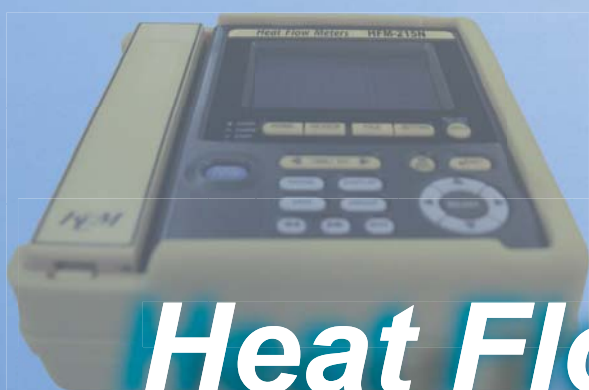

Heat Flow Meters
Heat Flow Sensors

A measurement of heat flow provides important and detailed thermal data that cannot be given by a measurement of temperature alone. The HFM series have the highest accuracy and reproducibility of the measurement of such heat flow because of the absolute calibration device. And the operation is extremely simple and easy as well. The HFM series enjoy a very high reputation and are used in various fields.

Application

Heat Dissipation Measurement

Furnace Wall, Heat Exchanger

Heat Dissipation Designing

Electronic Device and Component

Thermal Environmental Property

Building Material, Thermal Insulation

Clothes Performance Evaluation

Fiber, Clothes

Heat Dissipation from Human Body


Human Body

Principle


The heat flow analysis is made based on the principle as shown below: If a thin plate with a thermal conductivity of λ (W/mK) and a thickness of d (m) is contacted on a heat radiating surface as the figure shows, a heat flow Q (W/m²) which goes through the thin plate after it reaches to an equilibrium can be given by:

$$Q = \frac{\lambda}{d} \cdot \Delta T$$

ΔT = Temperature difference between two sides of the thin plate, and λ and d are known values.

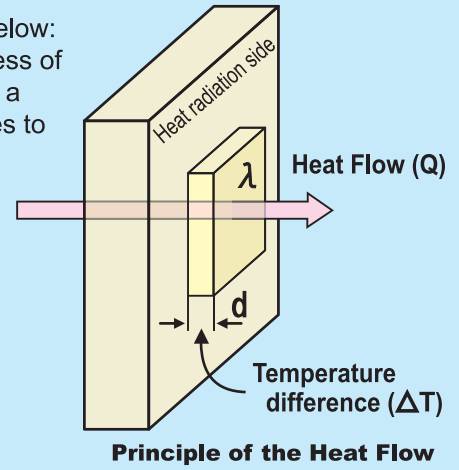


Heat Flow Sensor Structure

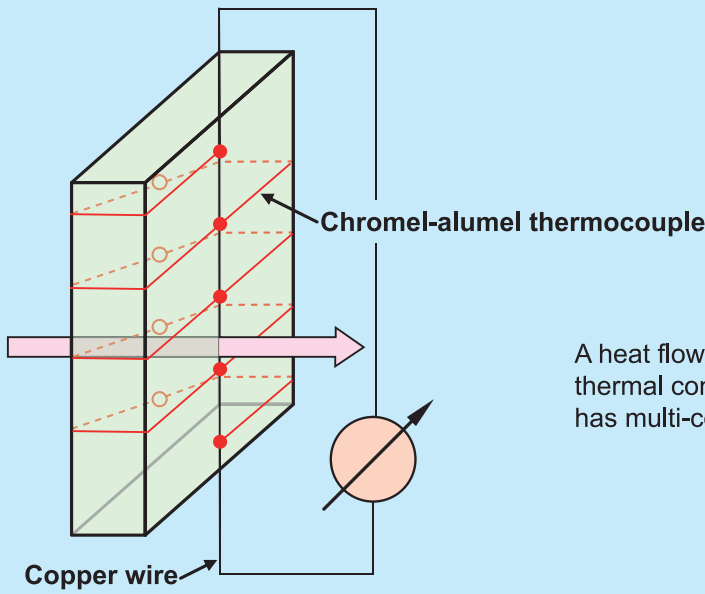

A heat flow sensor is made of a thin material with a low thermal conductivity. And its differential thermocouple has multi-contacts to improve an overall sensitivity.

There will be the most suitable sensor for every requirement !

A coverage of each sensor (application, temp. and heat flow ranges)

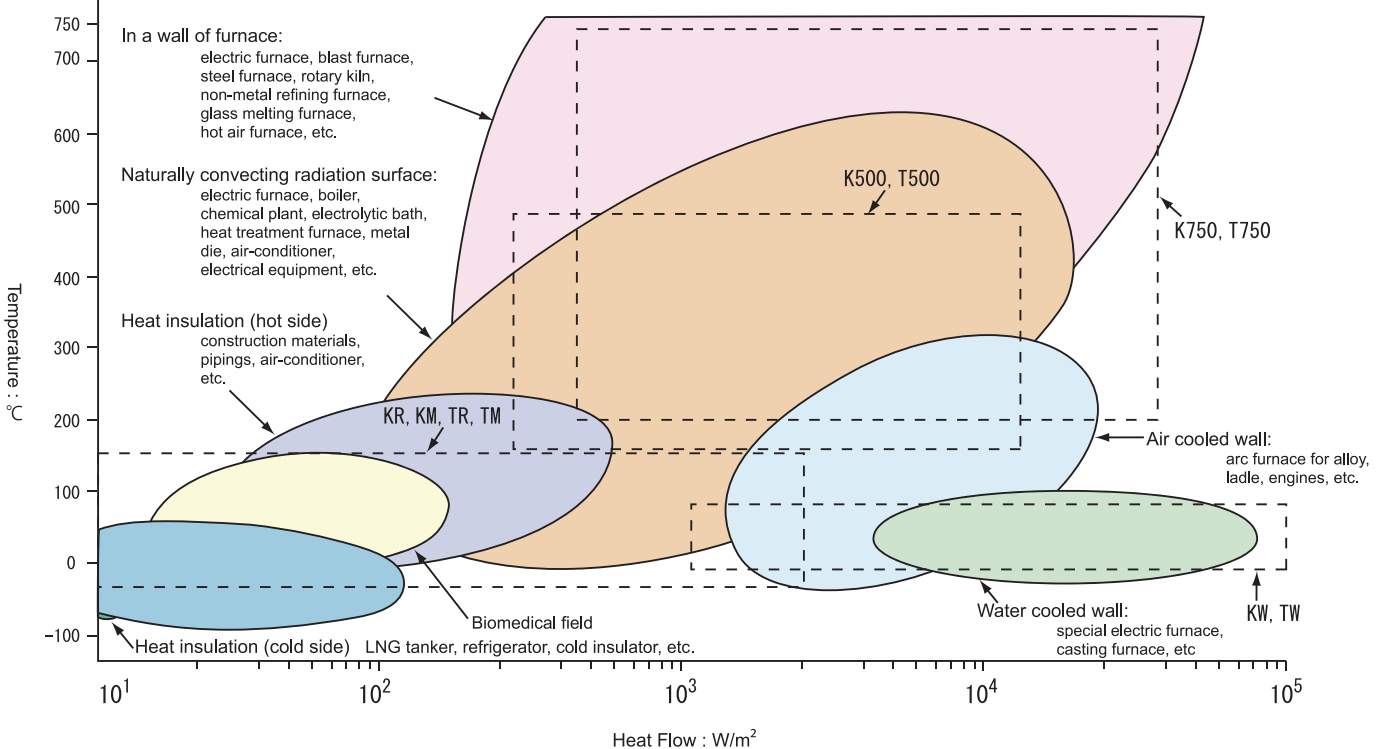

Simultaneous Measurement of up to 16 Channels

Multipoint Heat Flow Meter

HFM-215N



High performance Heat Flow Meter with data logger.

Easy measurement; by connecting an appropriate heat flow sensor to what to be measured and enter a sensor constant.

Connectable with All Heat Flow Sensors

Terminal block has 16 channels. Up to 16 sensors of sensor constant A type, or up to 8 sensors of sensor constant A/B type or sensor constant A type that requires temperature data can be connected.

3.5-inch Color TFT LCD

Waveform of collected data and bar chart can be shown. Heat flow value and temperature can digitally be shown which may also be shown with waveform.

High Capacity External Memory

Internal memory (16 MB) can store data of 55 hours when eight sensors of sensor constant A/B type are connected and sampling rate is set at one second. External memory media, Compact Flash or SD card (1 to 2 GB), enable continuous measurement of some years at some sampling rates.

Equipped with Ethernet

Ethernet (10BASE-T/100BASE-TX) enables data collection through network.

Data Communication

Equipped with e-mail transmitting, Web server, FTP server and FTP client functions. RS-485, RS-232C and USB communication devices can also be used.

Dual Power Source

Both rechargeable battery and AC adapter can be used, making the HFM-215N compact and easy to carry. Battery life for continuous use is seven hours. (May vary depending on conditions.)



Enhanced Safety

Equipped with shock-resistant rubber cushions.

Item	Specifications
Measurement Object	Heat Flow and Temperature
Display Range *1	Heat Flow: 0 to $\pm 99,999 \text{ W/m}^2$ Temperature: -40 to 750°C
Selectable Units	Heat Flow (W/m^2) + Temperature($^\circ\text{C}$) Heat Flow (W/m^2), Temperature($^\circ\text{C}$)
Sampling Cycle	200/500ms, 1/2/5/10/20/30sec, 1/2/5/10/30min, 1h
Display Update	Approx. 1 sec
What to Display	Waveform, bar chart, values of heat flow and temperature, and waveform plus such values
A and B Constants	A and B sensor constants can be input by key entry
Number of Sensors	Sensor constant A/B type, sensor constant A type that requires temperature data Up to eight (8) Sensor constant A type that requires no temperature data Up to sixteen (16)
Internal Memory	16MB Stores data of 55 hours with eight (8) sensors of sensor constant A / B type at sampling rate of one (1) second
External Memory Device	Compact Flash Type II, SD card, USB flash drive (copy only)
External Communication	Ethernet (10BASE-T/100BASE-TX), Web server, FTP server, FTP client, e-mail transmitting functions, Compliant with USB Rev 1.1, RS-232C, RS-485
Power Source	Rechargeable battery: Lasts for approx. seven (7) hours of continuous use on a full charge of about eight (8) hours. (RT 25°C , measurement cycle of five minutes or more, backlighting auto off in five minutes or less, data communication not in use.) Comes with AC adapter (AC 100 to 240 V) as standard
Ambient Conditions	Temperature: 0 to 50°C (0 to 40°C when using with battery) Humidity: 5 to 85%RH
Dimension	Approx. 155 (W) \times 155 (H) \times 55(D) mm (6.1 (W) \times 6.1 (H) \times 2.17(D) in) (Not including projection portions and rubber cushions)
Weight	Approx. 800g (1.76 lbs) (Not including battery and rubber cushions)
Accessories	AC Adapter—one Mini USB Cable—one Standard Software for PC*—one Lithium-ion Battery—one Operation Manual—one
Options	Application Software <Enables real-time display and control>

*1 Measurement range differs depending on choice of a heat flow sensor.

*2 Can be converted into waveform display and CSV file format through external memory.

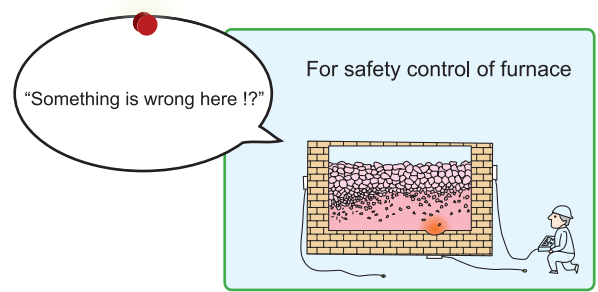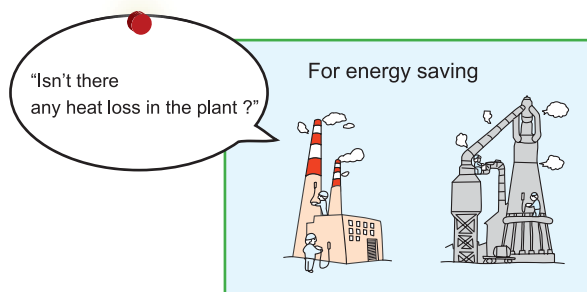

Measure Anywhere. Compact and Light.

Portable Heat Flow Meter HFM-201



Non-CE marking

Easy to carry, a portable type Heat Flow Meter.

To check heat dissipation from boilers or steam piping, evaluate thermal insulation, measure heating value of electronic devices and components, detect flaws of blast furnaces, etc. This Heat Flow Meter can be used at various sites on various occasions.

Display

Heat flow level in W/m^2 or $kcal/m^2h$ and temperature $^{\circ}C$ can be switched and shown on display.

Standard Sensor

Heat flow sensor model TR2-B is included.

Data Storage

Data memory can save 20 groups of files totaling 100 sets of data in storage.

Power Source

2-way power source from two AA dry cells (80-hour continuous run) or from AC adapter.

Carrying Case

Carrying case is included in the package

Data Communication




Data capture software enables you to import measurement data into your PC in real time. (Option)

Printer Option




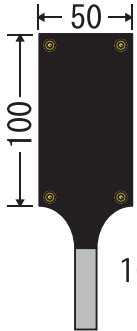
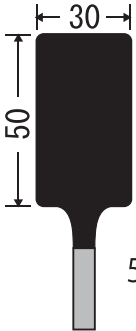
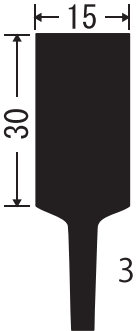
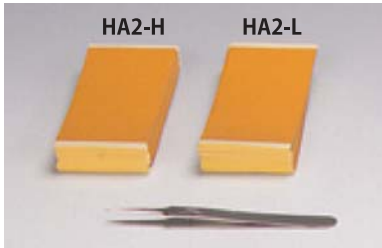
Optional printer is available.

Item	Specifications
Measurement Object	Heat Flow and Temperature
Display Range *1	Heat Flow: 0 to $\pm 99,990 W/m^2$ or $kcal/m^2h$ Temperature: -40 to $750^{\circ}C$
Selectable Units	Heat Flow: W/m^2 , $kcal/m^2h$ or Temperature: $^{\circ}C$
Sampling Cycle	Selectable from 1, 2, 5, or 10 seconds
Display Update	Synchronized with sampling cycle
Determination of mean value	Selection from moving average of 1 set (When set at 'Off'), 2 sets, 10 sets and 30 sets of data
A and B Constants	A and B sensor constants can be input by key entry
Data Memory	20 groups can be filed and total 100 sets of data are stored
External Communication	RS-232C port (one channel)
Ambient Conditions	Temperature: 0 to $50^{\circ}C$ Humidity: 20 to 80%RH (Subject no condensation)
Power Source	2 AA dry cells (80-hour continuous run) or from AC adapter
Dimension	82(W) \times 232(L) \times 22(H)mm
Weight	Approx. 220g
Accessories	Heat Flow Sensor TR2-B—One AA Dry Cell—Two AC Adapter—One Operation Manual—One Carrying Case—One
Options	Data Capture Software for PC(including connecting cable) Printer IDP-100 Connecting Cable for printer

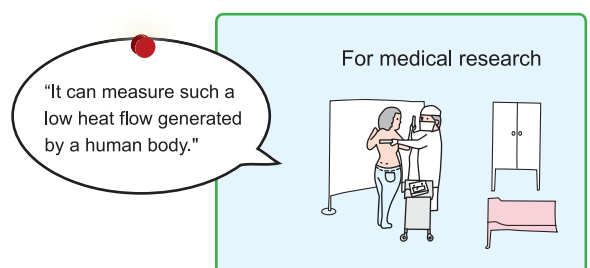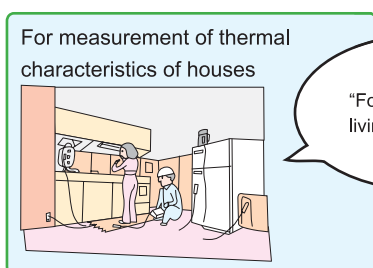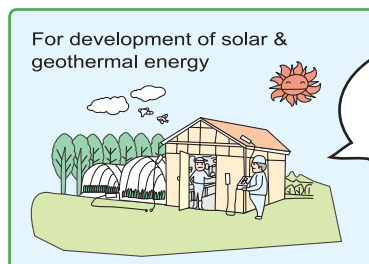*1 Measurement range differs depending on choice of a heat flow sensor.




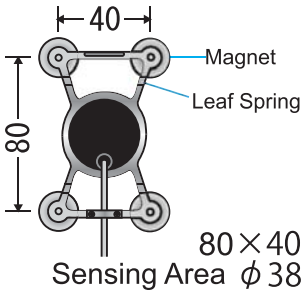
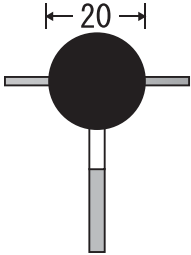
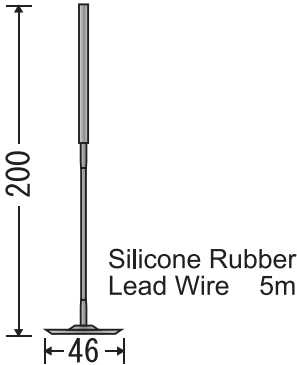


Heat Flow Sensors

Sensor Name	General-purpose Low Heat Flow Sensor	General-purpose Low Heat Flow Sensor	Low Heat Flow Sensor
For HFM-201 Use	TR 2 – B	TR 6 – B	TM 1 – B
For HFM-215N Use	KR 2	KR 6	KM 1
Sensor Image			
Normal Heat Flow Range	12 to 3,500 W/m ²	12 to 3,500 W/m ²	12 to 3,500 W/m ²
Normal Temperature Range	-40 to 150°C	-40 to 150°C	-40 to 150°C
Accuracy (%) *1	±2	±2	±2
Features & Applications	Being highly sensitive, the TR type sensor is capable of accurately measuring heat flow down to as low as 12W/m ² . It can be easily mounted on the object; in view of its flexibility, this is true in the case of objects with curved surfaces as well. As the TR type sensor comes in various sizes, as can be seen from the listing below, it can be selected in accordance with the requirement of the objects to be measured. The TR type sensor can be used in a wide variety of applications including the measurement of heat loss from insulated piping and the testing of heat characteristic of buildings. It can also be embedded in insulating materials or soil. In this case, however, a special calibration (extra charge) is required for accurate measurement.	Being highly sensitive, the TR type sensor is capable of accurately measuring heat flow down to as low as 12W/m ² . It can be easily mounted on the object; in view of its flexibility, this is true in the case of objects with curved surfaces as well. As the TR type sensor comes in various sizes, as can be seen from the listing below, it can be selected in accordance with the requirement of the objects to be measured. The TR type sensor can be used in a wide variety of applications including the measurement of heat loss from insulated piping and the testing of heat characteristic of buildings. It can also be embedded in insulating materials or soil. In this case, however, a special calibration (extra charge) is required for accurate measurement.	Although its characteristics are almost the same as those of TR type, the TM type sensor is of small size so as to enable measurement of heat radiation from living bodies and small parts of equipment.
Core Material	Silicone Rubber	Silicone Rubber	Silicone Rubber
Covering Material	Silicone Rubber	Silicone Rubber	Silicone Rubber
Shape & Dimensions	 <p>100 × 50 × t3</p> <p>Silicone Rubber Lead Wire 5m</p>	 <p>50 × 30 × t3</p> <p>Silicone Rubber Lead Wire 5m</p>	 <p>30 × 15 × t1.5</p> <p>Silicone Rubber Lead Wire 5m</p>
Others	 <p>Pressure-sensitive adhesive sheet to place the sensor on where you wish to measure. (Option) Available in two types: for high temperature and for low temperature.</p> <ul style="list-style-type: none"> ● HA2-H : Double-sided adhesive sheet for high temperature (70°C or above) ● HA2-L : Double-sided adhesive sheet for low temperature (70°C or below) 		

* Images for illustrative purposes only. Actual sensors may differ from the images shown.

*1 According to KEM measurement result.

Surface Type High Heat Flow Sensor	Surface Type High Heat Flow Sensor ϕ 20	Embedding Type High Heat Flow Sensor
T 5 0 0 B - B	T 5 0 0 B - 2 0 - B	T 7 5 0 - B
K 5 0 0 B	K 5 0 0 B - 2 0	K 7 5 0
		
350~17,000 W/m ²	350~17,000 W/m ²	580~58,000 W/m ²
70~500°C	70~500°C	200~750°C
±5	±5	±7
<p>Having excellent thermal resistance and durability, the T500 type & K500 sensor can be continuously used on surfaces having temperatures as high as 500°C. Since it is suited to measuring heat flow from high temperature surfaces, e.g., electric furnace walls, the T500 type sensor can be used in a wide variety of applications, ranging from energy saving to furnace operation control. When measuring an iron furnace wall, put the supplied magnets on the side objects to fix the sensor.</p>	<p>Having excellent thermal resistance and durability, the T500 type & K500 sensor can be continuously used on surfaces having temperatures as high as 500°C. Since it is suited to measuring heat flow from high temperature surfaces, e.g., electric furnace walls, the T500 type sensor can be used in a wide variety of applications, ranging from energy saving to furnace operation control. When measuring an iron furnace wall, put the supplied magnets on the side objects to fix the sensor. If magnets cannot be used, fix the sensor by welding or with screws.</p>	<p>The T750 type sensor was developed for embedding in furnace walls or insulating materials to measure heat flowing from them. As it's excellent thermal resistance enables it to be continuously used on parts having temperatures as high as 750°C, the sensor is highly suited to measuring heat flow from electric furnace walls etc.</p>
Air	Air	Air
Stainless steel	Stainless steel	Stainless steel
 <p>80 × 40 Sensing Area ϕ 38</p> <p>Silicone Rubber Lead Wire 5m</p>	 <p>Silicone Rubber Lead Wire 5m</p>	 <p>Silicone Rubber Lead Wire 5m</p>
<p>Although the K500B or T500B-B type sensor (color:black) is generally employed, use the K500S or T500S-B (color:silver) for surfaces that are silver color coated or have a metallic luster (emissivity, 0.5 max for both).</p>	<p>Although the K500B-20 or T500B-20-B type sensor (color : black) is generally employed, use the K500S-20 or T500S-20-B type sensor (color : silver) for surfaces that are silver color coated or have a metallic luster (emissivity, 0.5 max for both).</p>	<p>"K750 and T750-B are for embedding measurement only. Contact KEM or your local agent should you wish to use them for other measurements. Surface Type High Heat Flow Sensors of the same form, K750S or T750S-B (color: silver), are also available."</p>

Heat Flow Meters
Heat Flow Sensors

KEM
KYOTO ELECTRONICS
MANUFACTURING CO.,LTD.

Overseas Division : 2-7-1, Ichigaya-sadohara-cho, Shinjuku-ku,
TOKYO, 162-0842, JAPAN
FAX : +81-3-3268-5592 Phone : +81-3-5227-3156

URL: <http://www.kyoto-kem.com>

Distributed by

Specifications and design subject to change for improvements without notice. Printed in Japan.

1310-13-JW