# Series 439D Vibrating Bells by Kidde



Effective: September 2011

K-75-010

## **FEATURES**

- Agency approvals and listings: UL, FM, CSFM
- 6-inch and 10-inch shell sizes, 24 Vdc models
- Mounting options for surface, semi-flush, outdoor, and concealed conduit installation
- Red smooth finish to improve appearance and durability

## **SERIES 439D VIBRATING BELLS**



#### **DESCRIPTION**

Edwards Signaling<sup>TM</sup> manufactured Vibrating Bells provide a superior engineered notification product for fire and life safety alarm systems. The vibrating bells are designed for public mode signaling in accordance with the latest edition of NFPA 72. These vibrating bells produce a long and continuous ringing sound.

## **MOUNTING**

Bells may be easily surface mounted onto a wall mounting plate or mounted with an optional backbox. (See ordering information.) A mounting plate, insulator plate, lockwashers and nuts are provided for each bell body.

## ORDERING INFORMATION

Part Number	Input Voltage	Shell Size	dBA @ 10 ft	Current (Amps)
439D-6AW-R	24	6 inch	92	0.085
439D-10AW-R	24	10 inch	92	0.085
75-000000-005	semi-flush backbox			
75-000000-006	surface backbox			
75-000000-008	weatherproof backbox			

#### **DIMENSIONS**

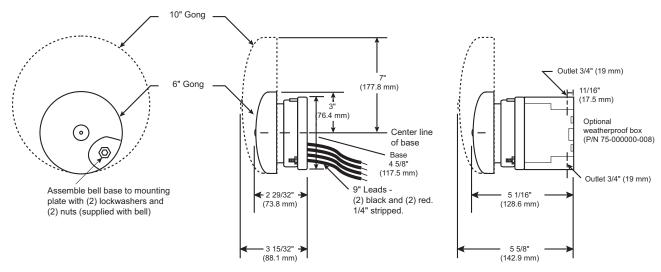


Figure 1. Series 439D Bell Dimensions

#### INSTALLATION

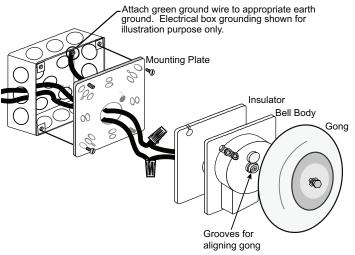


Figure 2. Wall Box Installation

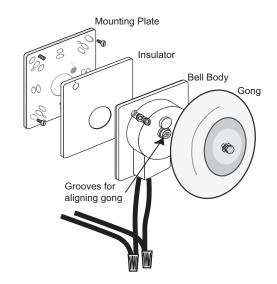


Figure 3. Surface Mount Installation

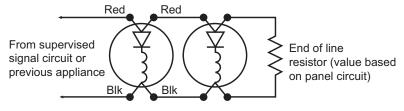


Figure 4. Bell Wiring Diagram

Kidde is a registered trademark of Kidde-Fenwal, Inc. Edwards Signaling is a trademark of Edwards.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular question, contact KIDDE-FENWAL, INC., Ashland, MA 01721.



400 Main Street Ashland, MA 01721 Ph: 508.881.2000 Fax: 508.881.8920 www.kiddefiresystems.com