

Kidde Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid
Nitrogen Pilot Cylinder, Bracket, and Adapter
Data Sheet





A UTC Fire & Security Company

Effective: March 2007
K-45-5050

FEATURES

- For Use with UL, ULC and FM Approved Systems

P/N: 877940

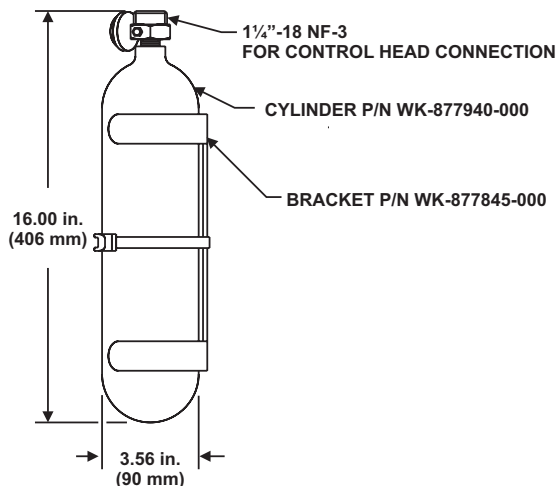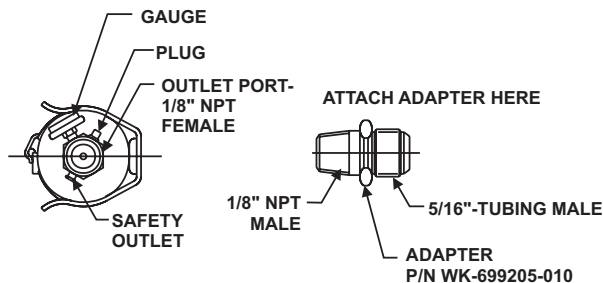

MATERIAL

- Cylinder: Steel, Painted Black
- Valve: Brass
- Bracket: Steel, Painted Black
- Adapter: Brass

SPECIFICATIONS

- Cylinder Capacity:
108 in.³ (1770 cm³)
- Safety Outlet Burst Range:
2650 to 3000 PSI (183 to 207 bars) at 70°F (21°C)
- Nitrogen:
NITROGEN-BB-n-411b, Grade A, Type 1
1800 PSI (124 bars) at 70°F (21°C)

Kidde is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.
If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.