

Kidde Engineered Fire Suppression System


Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid
Stop (Directional) Valves, 2-1/2 in. and 3 in.
Data Sheet



A UTC Fire & Security Company

Effective: March 2007
K-45-5140

P/N: 890010

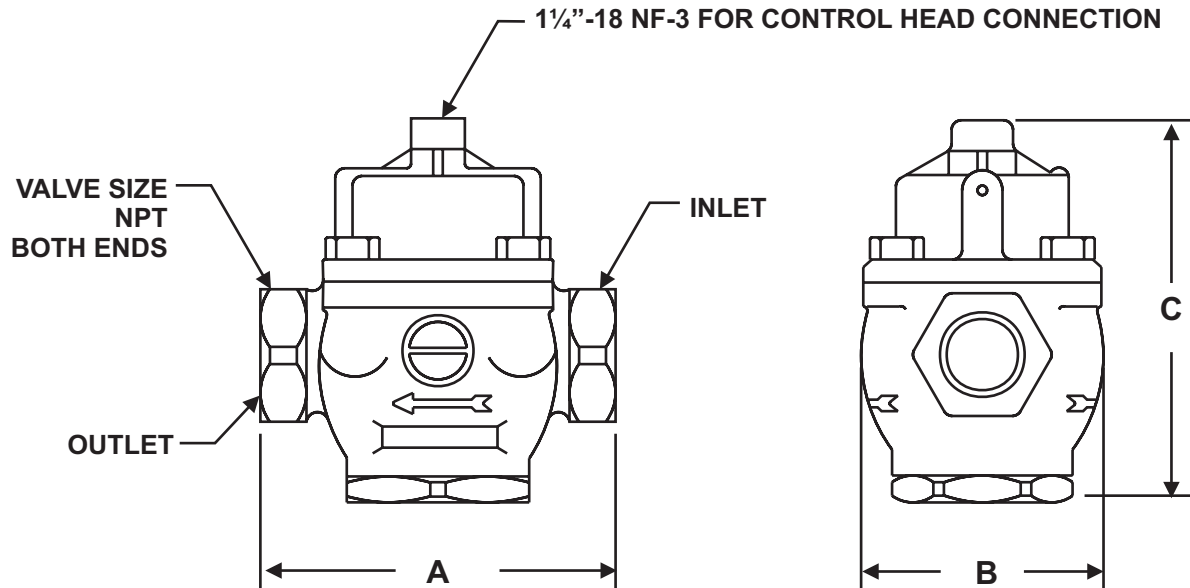

Note: Valve must be installed with the arrow pointing in the direction of flow.

MATERIALS

- Valve Body: Brass
- Gasket: Iron
- Flanges, Bolts, and Nuts: Steel

ORDERING INFORMATION

Check Valve Size	Part Number	Welding Neck Flange Part Number (2 Required)	Equivalent Length
2-1/2 in.	890010	263716	68 ft. (21 m)
3 in.	890010	6810-1200	216 ft. (66 m)

Kidde is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.
If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Kidde Fire Systems
A UTC Fire & Security Company
400 Main Street
Ashland, MA 01721
Ph: 508.881.2000
Fax: 508.881.8920
www.kiddefiresystems.com