

# Kidde Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid



Effective: July 2013  
K-45-9048

Supervisory Pressure Switch, 3- inch Valve (prior to May 1, 2013) Data Sheet  
P/N: 06-118263-001

## FEATURES

- Both Normally Open and Normally Closed Configuration with One Unit
- UL Listed and FM Approved
- CRUUS Recognized Component (US and Canada)
- For Use on 3-inch Valve Cylinders Manufactured Prior to May 1, 2013 Only

## DESCRIPTION

The cylinder supervisory pressure switch is intended to detect a fall in pressure in the Kidde Engineered System cylinder. The cylinder supervisory pressure switch can be wired for either normally open or normally closed operation, depending on installation requirements. This cylinder supervisory pressure switch can be installed on 3-inch valve cylinders manufactured prior to May 1, 2013. For 3-inc valve cylinders manufactured after May 1, 2013, use Supervisory Pressure Switch P/N: 06-118262-001.

## OPERATION


When the pressure in the Kidde Engineered System container drops from the standard charge pressure of 360 PSI (25 bar) to below 305 PSI (21 bar) the switch operates. If wired in the NC (open-under-pressure) configuration the resulting pressure drop will cause the contacts to close. When connected to a monitored circuit of a suppression control panel the switching will result in an alarm or trouble condition.

**Note:** If the temperature of the cylinder contents drop close to a temperature of 32°F (0°C) or less the pressure in the cylinder will be equal to or less than 305 PSI (21 bar) and the switch will operate. However the minimum operating temperature of the system is 0°F (-18°C).

## INSTALLATION

The supervisory pressure switch can be installed on a fully charged container, without loss of pressure, provided the unit is handled with care and only by trained service personnel. Remove the protective plug in the pressure port fitting by holding the fitting with an 5/8 inch open-end wrench and removing the plug with another wrench. Apply Permacel® #412D Teflon® tape to the male switch threads and while maintaining the wrench on the fitting install the switch. Tighten using a 1-1/16 inch open-end wrench.

Leak check using a leak detector or bubbling solution. Secure switch body with wrench when connecting electrical conduit. Isolate the assembly from shock, vibration and areas subject to wide-ranging or rapid temperature fluctuations. Disconnect all supply circuits before wiring the supervisory switch.

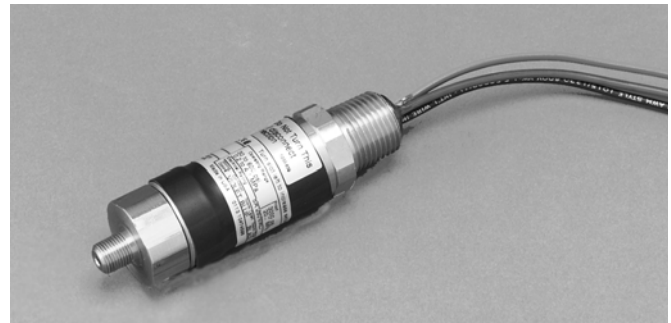

## ORDERING INFORMATION

The cylinder supervisory pressure switch offers combined normally opened and normally closed functionally. The part number for ordering the cylinder supervisory pressure switch is 06-118263-001.

## SPECIFICATIONS

|                              |  |
|------------------------------|--|
| Setting:                     | 305 PSI (21 bar) on falling pressure                               |
| Electrical rating:           | 5 Amps, 250 Vac  |
| Wire color coding:           | Blue = Normally Open<br>Black = Normally Closed<br>Violet = Common |
| Operating temperature range: | 32 to 130°F (0 to 54°C)  |
| Pressure connection:         | 0.25-27 in. NPT male connector                                     |
| Wetted materials:            | EPR, Brass Copper  |
| Lead length:                 | 36 in. ± 2 in. (914 mm ± 50 mm)                                    |

Kidde is a registered trademark of Kidde-Fenwal, Inc. 3M and Novec are trademarks of 3M Company. All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.  
If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Kidde Fire Systems  
400 Main Street  
Ashland, MA 01721  
Ph: 508.881.2000  
Fax: 508.881.8920  
[www.kiddefiresystems.com](http://www.kiddefiresystems.com)