

# CO<sub>2</sub> Component Description




A UTC Fire & Security Company

## Use of Flanged Nozzle Mounting Kit to Mount Type "S" Flanged Nozzle to Duct or Enclosure with Optional Frangible Disc

Effective: February 2007  
K-81-1143

P/N: 803330

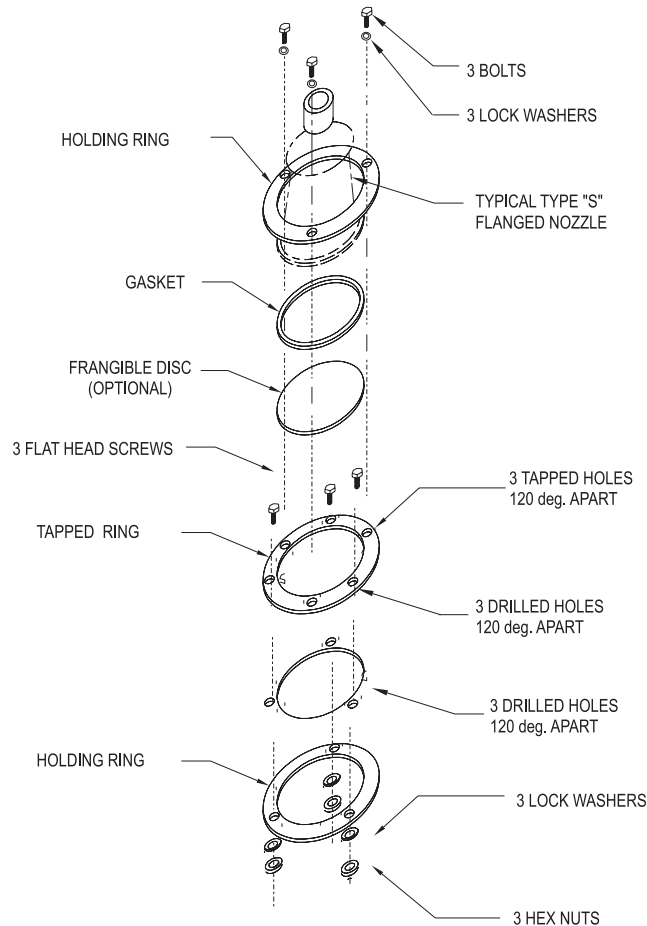

BOLTS:  $\frac{5}{16}$  -18 X  $\frac{1}{2}$ "

FLAT HEAD SCREWS:  $\frac{5}{16}$  -18 X  $\frac{7}{8}$ "

LOCK WASHERS:  $\frac{5}{16}$

HEX NUTS:  $\frac{5}{16}$  -18

### MATERIALS

RINGS: HOT ROLLED STEEL

GASKET: LEATHER

FRANGIBLE DISC: ALUMINUM P/N 31002 OR  
STAINLESS STEEL P/N 81-220299-000

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.