



CO₂ Component Description



A UTC Fire & Security Company

Nitrogen Pilot Cylinder, Bracket, and Adapter

Effective: February 2007
K-81-5050

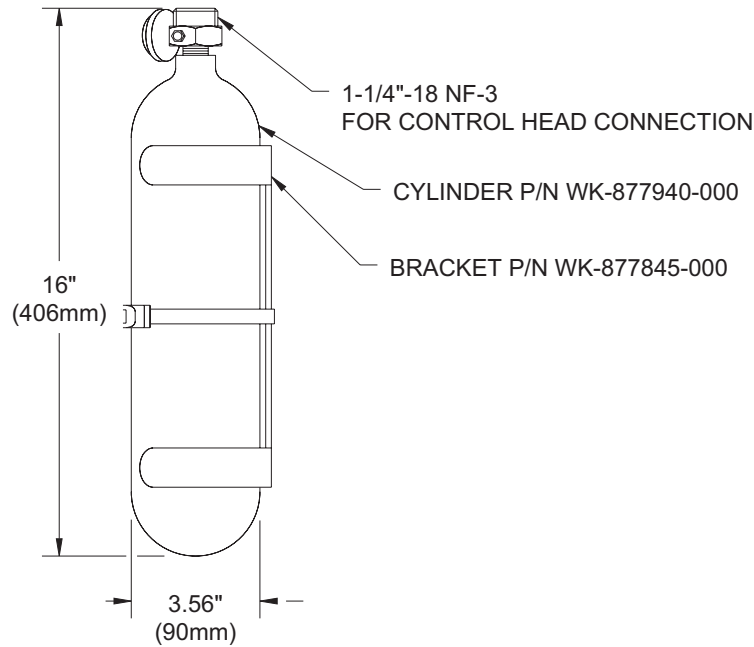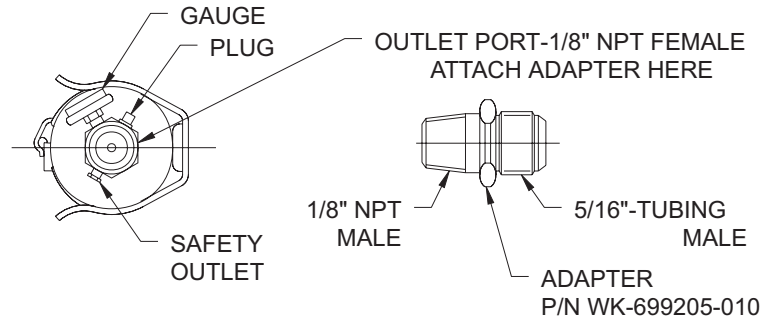

MATERIALS

CYLINDER: STEEL, PAINTED BLACK

VALVE: BRASS

BRACKET: STEEL, PAINTED BLACK

ADAPTER: BRASS

CYLINDER CAPACITY - 108 IN³ (1770 CM³)

SAFETY OUTLET BURST RANGE - 2650-3000 PSI (183-207 BARS) AT 70°F (20°C)

NITROGEN-BB-n-411b GRADE A, TYPE I 1800 PSI (124 BARS) AT 70°F (20°C)

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Kidde Fire Systems
A UTC Fire & Security Company
400 Main Street
Ashland, MA 01721
Ph: 508.881.2000
Fax: 508.881.8920
www.kiddefiresystems.com