

PANELS SHOWN MAY OR MAY NOT REPRESENT THE SPECIFIC PROFILE, ASK A SALESPERSON OR VISIT OUR WEBSITE FOR COMPLETE DETAILS.



CUSTOMER SERVICE PROMISE:

UNEQUALED TURNAROUND TIME • INFORMATIVE/HIGHLY SKILLED STAFF
UNPARALLELED CUSTOMER SERVICE

MISSION STATEMENT:

INSPIRE THE FREEDOM TO CREATE

BRIDGER STEEL SPECIALIZES IN ARCHITECTURALLY APPEALING, UNIQUE PROFILES IN VARIOUS TYPES OF METALS INCLUDING, BUT NOT LIMITED TO, OUR RUSTIC MATERIALS TRUTEN™ (A606 & 1008), GALVANIZED, GALVALUME®, BONDERIZED, REZIBOND®, AND OTHER CUSTOM METALS.



WWW.BRIDGERSTEEL.COM • TOLL FREE: 877.STEELMT



1558 AMSTERDAM RD. BELGRADE, MT 59714
4120 DOUBLE EAGLE RD. E. HELENA, MT 59635
11835 QUAAL RD. BLACK HAWK (RAPID CITY), SD 57718




17 LIBERTY LANE GREAT FALLS, MT 59404
7570 ENTRYWAY DRIVE BILLINGS, MT 59101
6797 WILDCAT RD. EVANSVILLE (CASPER), WY 82636

1-3/4" TRU-SNAP PANEL PROFILE

AN ARCHITECTURALLY APPEALING
STANDING SEAM METAL ROOF SYSTEM

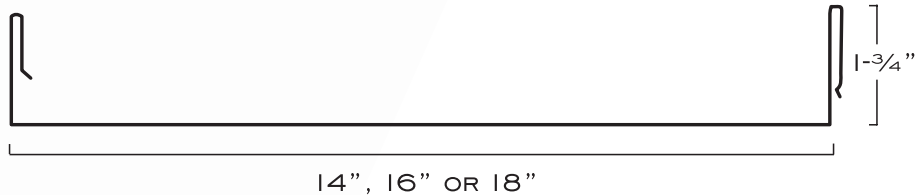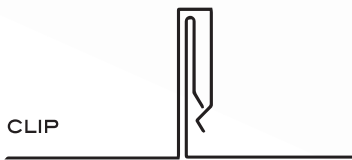

STRIATED PANEL

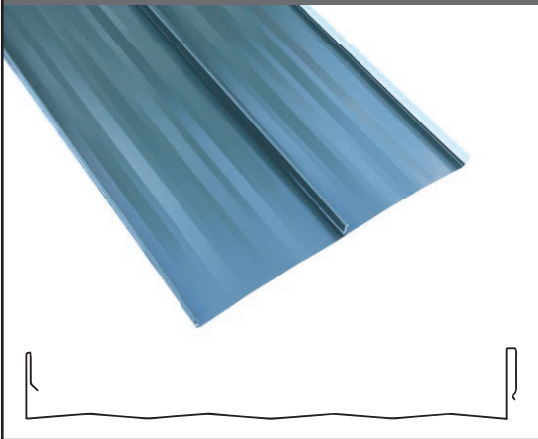

- : PANELS CAN BE PRODUCED IN:
 - : 14", 16" AND 18" WIDTHS
 - : LENGTHS FROM 3' TO 100'
 - : 26 AND 24 GAUGE
 - : FLAT OR WITH STRIATIONS
- : MINIMUM SLOPE AT 2:12 PITCH
- : CLIP PLACEMENT RECOMMENDED EVERY 24" ON A SOLID SUBSTRATE OR 24 GAUGE PANELS 14" OR 16" WIDE UP TO 4'0" ON OPEN PURLIN. SEE SALES REP FOR DETAILS
- : BRIDGER STEEL RECOMMENDS STRIATIONS TO MINIMIZE OIL CANNING. BACKER ROD MAY BE APPLIED UNDER FLAT PANEL APPLICATION TO HELP MINIMIZE OIL CANNING (OIL CANNING IS NOT A CAUSE FOR REJECTION)
- : INSTALLATION OVER SOLID SUBSTRATE OR OPEN PURLIN RECOMMENDED
- : PANELS CAN BE MANUFACTURED AT JOBSITE TO GREATLY REDUCE THE RISK OF DAMAGE DURING TRANSPORTATION
- : PROTECTIVE FILM CAN BE APPLIED TO PANELS FOR ADDED PROTECTION AT CUSTOMER'S REQUEST OR AT BRIDGER STEEL'S RECOMMENDATION
- : MANY COLORS AND KYNAR PAINT SYSTEMS AVAILABLE. PLEASE REFER TO COLOR CHART OR VISIT BRIDGERSTEEL.COM FOR MORE INFORMATION
- : CUSTOM TRIM AND ACCESSORIES AVAILABLE
- : WATERTIGHT WARRANTY AVAILABLE