

FLUSH SOFFIT PANEL PROFILE


AN ARCHITECTURALLY APPEALING 12" OR 16" CONCEALED
FASTENER PANEL FOR WALL, FASCIA OR SOFFIT
APPLICATIONS WHERE A FLUSH OR FLAT
APPEARANCE IS DESIRED

FLAT PANEL OPTION

12" or 16"












San Surger of the same of the

- : PANELS CAN BE PRODUCED IN:
 - : 12" AND 16" WIDTHS : LENGTHS FROM 3' TO 100'
 - : 26, 24 AND 22 GAUGE : 7/8" HEIGHT
- WHEN VENTED OR PERFORATED, THERE IS 5.376 SQUARE INCHES OF AIR FLOW PER LINEAR FOOT OF SOFFIT
- : PANEL OPTIONS (THESE OPTIONS CAN BE COMBINED):
 - :FLAT OR PERFORATED : 0,1 OR 2 V STIFFENERS
 - : 0" TO 1" REVEAL
- DESIGNED FOR WALL, FASCIA AND SOFFIT APPLICATIONS. NOT INTENDED AS A ROOFING PANEL
- BRIDGER STEEL RECOMMENDS A V-STIFFENER TO MINIMIZE OIL CANNING. (OIL CANNING IS NOT A CAUSE FOR REJECTION)

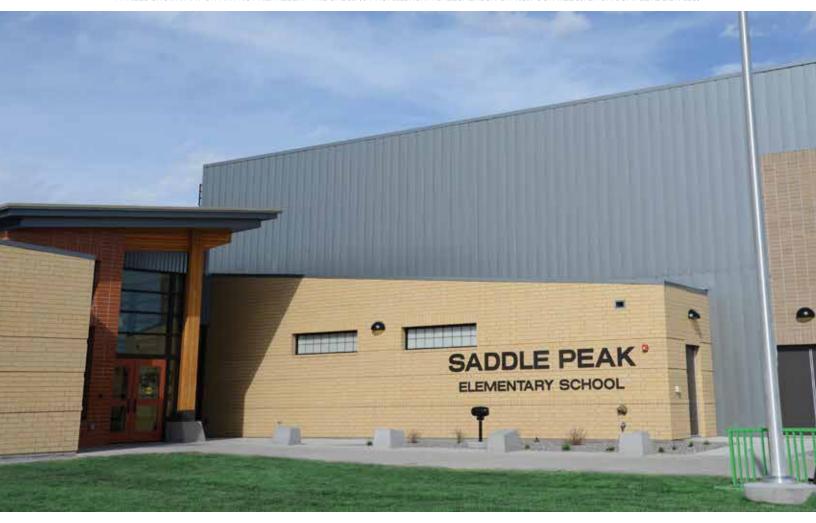

CUSTOMER SERVICE PROMISE:

UNEQUALED TURNAROUND TIME • INFORMATIVE/HIGHLY SKILLED STAFF

UNPARALLELED CUSTOMER SERVICE

MISSION STATEMENT:

INSPIRE THE FREEDOM TO CREATE

BRIDGER STEEL SPECIALIZES IN ARCHITECTURALLY APPEALING, UNIQUE PROFILES IN VARIOUS TYPES OF METALS INCLUDING, BUT NOT LIMITED TO, OUR RUSTIC MATERIALS TRUTEN" (A606 & 1008), GALVANIZED, GALVALUME, BONDERIZED, REZIBOND, AND OTHER CUSTOM METALS.



WWW.BRIDGERSTEEL.COM • TOLL FREE: 877,STEELMT



