

ProSNS® Series

FSNS6PL Specification Sheet



The ProSNS FSNS6PL Connector is a Plenum F-Type Connector that Fits Most RG6 Plenum Coaxial Cables.

ProSNS Connector: FSNS6PL

Specifications

- Body Material: Brass
- Body Material (Plating): Nickel
- 75 Ohm Construction
- Cable Pullout Force Exceeds 40 Lbs

Electrical Performance

- DC-1 GHz > 31 dB Return Loss < 1.05 VSWR
- DC-2 GHz > 26 dB Return Loss < 1.09 VSWR
- DC-3 GHz > 21 dB Return Loss < 1.18 VSWR


Quality in Design

The ProSNS connector series combines patented technologies and traditional, easy-to-use installation techniques together to create a high-quality connector family.



FSNS6PL

Internal Depiction of a ProSNS RG6 Connector

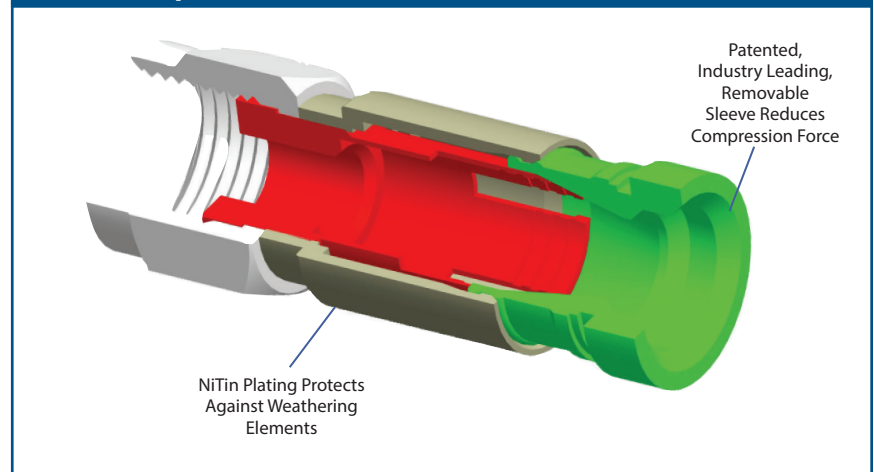

Cable Sizes

Inches	Minimum	~	Maximum
Center	.0399	~	.0418
Dielectric	.165	~	.172
Outer Jacket	.220	~	.250


Millimeters	Minimum	~	Maximum
Center	1.01	~	1.06
Dielectric	4.19	~	4.37
Outer Jacket	5.59	~	6.35

ProSNS Universal F Male Connector: FSNS6PL

Return Loss Performance

The return loss performance should be one of the most important factors in choosing a connector. Return loss (RL) represents the quality and consistency of the signal path. Better (more negative) RL measurements are the result of better impedance stability within the signal path and, therefore, lower reflected signal loss in the path.


All Belden ProSNS connectors meet or exceed SCTE return loss standards, providing superior return loss results and a dependable, high-quality signal.

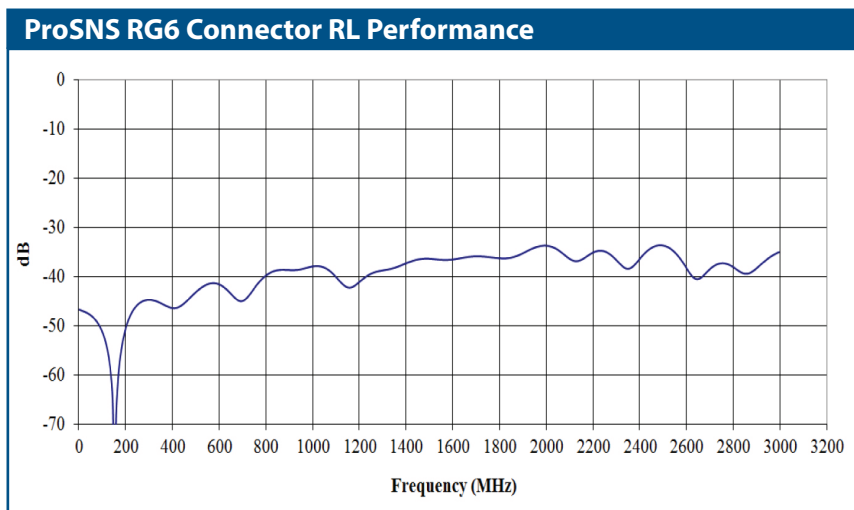

Recommended Installation Tools



CPLCCT-SLMR

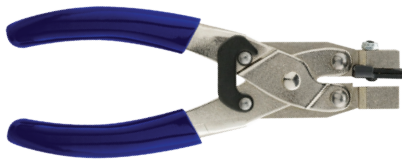

CPSNSCT-596



PSA59/6



FSNS6PL

Part Number*	Description	Impedance (Ohms)	Color Band	Recommended Tools**
FSNS6PL	"F" Male Connector for Plenum RG6 Cable	75	Green	CPLCCT-SLM or CPSNSCT-596

*RG6 ProSNS Connectors are also available in retail packaging when ordered with [Part Number]-R.

** Most industry compression tools are compatible with ProSNS Connectors