


# AquaTight® EX® Universal Compression Connectors

## Series 6 & 59



Moisture can kill a network. In real life, the use of clear port seals is often intermittent, and using the correct port seal is a tall order. Improper use or lack of port seals leaves connectors susceptible to the elements. The PPC AquaTight Universal Drop Connector guarantees the use of the proper port seal every time, keeping the moisture out.

### Features & Benefits

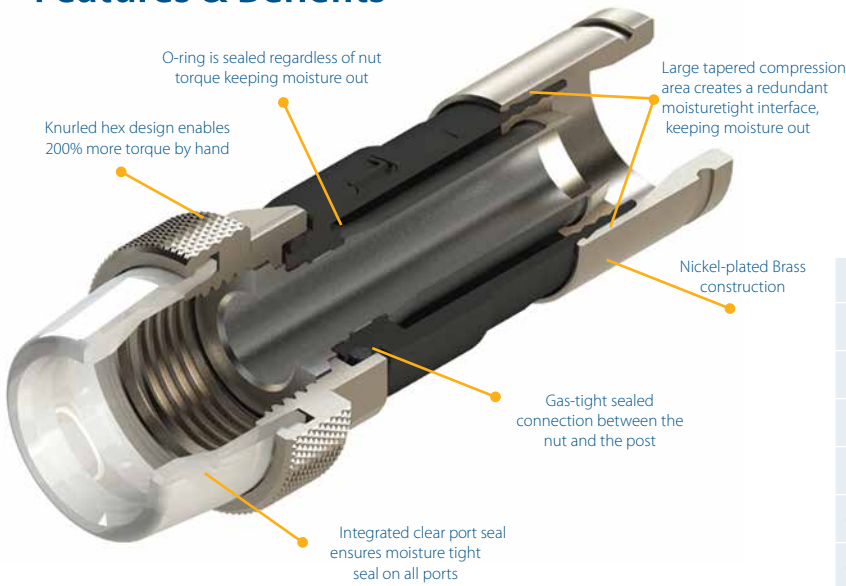

### Product Specifications

Bandwidth	0 MHz to 3 GHz
Impedance	75 Ohms (nominal)
Return Loss	Minimum -30 dB to 3 GHz
Insertion Loss	Less than .10 dB to 3 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Temperature	-40° F to + 140° F (-40° C to 60° C)
Cable Retention	45 lbs (20.41 kg) minimum

*Meets or Exceeds all SCTE Specifications*

## AquaTight® EX® Compression Connectors: Series 6 & 59

EX6WS

EX6XLWS

EX59WS

EX59XLWS



VT200

VT300

LDT596-250

TW307 AH



### Part Numbers

EX6WS	AquaTight® EX® connector, integrated port seal, series 6 cable
EX6XLWS	AquaTight® EX® connector, integrated port seal, extended body, series 6 cable
EX59WS	AquaTight® EX® connector, integrated port seal, series 59 cable
EX59XLWS	AquaTight® EX® connector, integrated port seal, extended body, series 59 cable

### Preparation & Installation Tools

Compression Tool	CATAS, VT200 (for use w/ XL series)		
	CAT-AS-EX, VT300 (for use w/ EX series)		
¼" – ¼" universal drop cable prep tool	LDT596-250	DDT59611	
7/16" snap torque wrench	TW207	TW307	TW307 AH