


KS Adapters

Splice Block




PPC Part #	Description
CSPB	Inline splice block, universal splice adapter for 2 pin type connectors
TSPB	Pedestal splice block, universal splice adapter for 2 pin type connectors

Integral Pedestal Splice Block




PPC Part #	Description
ISPB	Integrated pedestal splice block with self-seize pin. Installable to any pin connector. Provides 30dB structural return loss to 1 GHz and a current rating of 20 amps. No set screws, caps or test point.
ISPBT	Integrated pedestal splice block with self-seize pin. Installable to any pin connector. Provides 30dB structural return loss to 1 GHz and a current rating of 20 amps. Test point with dust cap, No set screws

Field Installable Extension Connector

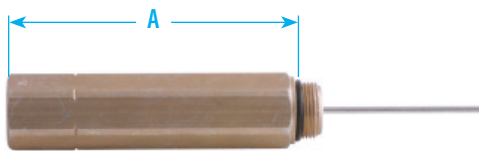

PPC Part #	Pin to Pin Length "A"	Description
EXT3	3.0 Inches (7.62 cm)	Field installable extension connectors provide additional length with self-seize pin. 1 GHz rating installable to any pin connector. Provides greater than -30 dB structural return loss and a current rating of 20 Amps.
EXT4.5	4.5 Inches (11.43 cm)	
EXT6	6.0 Inches (15.24 cm)	
EXT9	9.0 Inches (22.86 cm)	


"KS" Port Terminator

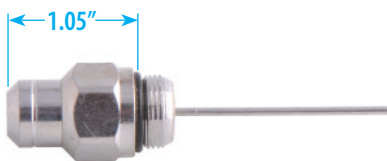

PPC Part #	Volt Rating	Description
UMTR6KV	6.0 KV	Universal male terminator for 5/8-24 entry ports. Blocks 60 cycle AC and terminates RF signals.
UMTRHV	2.5 KV	
UMTR	1.0 KV	


KS Adapters

"F" Female "KS" Adapter, 2 GHz

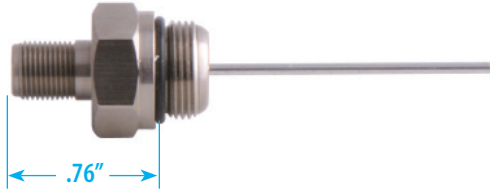


PPC Part #	Description
CF61G1A	The nickel plated, all brass adapter converts KS interface to "F" series female. The CF61G1A provides greater than -30 dB structural return loss to 2 GHz.

"F" Female "KS" Adapter, Power Blocking

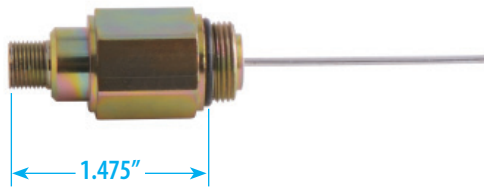


PPC Part #	Description
CF61625PB	All brass power blocking connector, KS port (housing) to "F" Female.

"F" Female "KS" Male Adapter Power Blocking

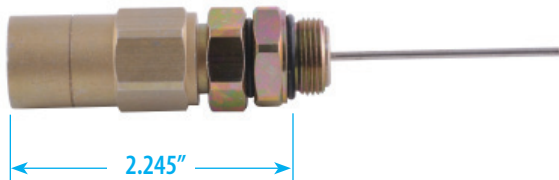


PPC Part #	Description
CKSFKSMPBAC	75 Ohm power blocking coupler, KS-female to KS-male swivel.

BAFF Adapter, Connector to "F" Series Female, Brass



PPC Part #	Description
ICHBAFFKS/2	The NiTiN plated, all brass 2 GHz adapter converts any pin type connector to "F" series female. Greater than -30 dB structural return loss to 2 GHz.


Male "F" Adapter, Connector to "F" Series Male, Brass



PPC Part #	Description
ICHAFM/2	The NiTiN plated, all brass 2 GHz adapter converts any pin type connector to "F" series male. Greater than -30 dB structural return loss to 2 GHz.


KS Adapters

Housing to Housing Male Splice Adapter, Antirotational, Weather Sealed

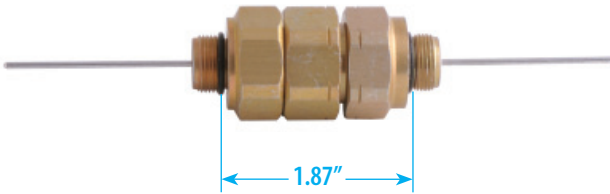


PPC Part #	Description
CKSKSARS	The 1 GHz housing to housing coupling connector is a non-rotational connector designed to permit the cascading of taps. Entry pins are fully weather sealed.

Housing to Housing Male Splice Adapter, Pedestal Version

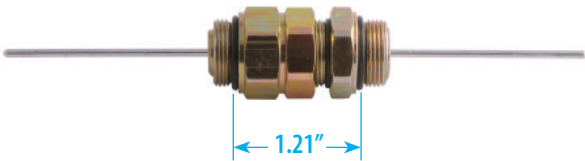


PPC Part #	Description
CKSKSSW	The 1 GHz housing to housing is a non-rotational connector designed to permit the cascading of taps. brass construction and reduced size is ideal for use in confined spaces.

Housing to Housing Male Splice Adapter, Rotational

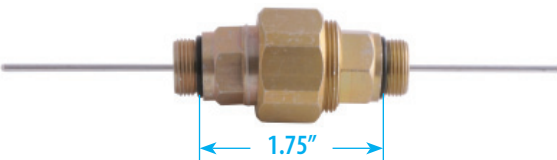

PPC Part #	Description
CKSKSULT	The 1 GHz housing to housing is a non rotational connector designed to permit the cascading of taps and comes standard with vibration resistant locking threads.

Female Splice Coupler



PPC Part #	Description
CKSKSHFS	Field installable adapter enables splicing of any type of cable to any other type, using pin connectors. The CKSKSHFS provides greater than -30 dB structural return loss to 1 GHz and has a current rating of 20 Amps.