


Specification: T&C Series LI-PL-(specify size)-L HDPE injection molded lint interceptor with flow rating of ____ (indicate) and liquid holding capacity of ____ (indicate). Unit shall include: two internal straining baffles with 3/8" diameter holes spaced 1/2" apart, internal deep seal trap, and HDPE injection molded, non skid, rectangular gasketed lid with securing latches.

Function: Used in maintenance facilities to receive waste water that contains lint. Typically installed either on or recessed in the floor. Regular maintenance is required to keep the interceptor functioning. The lint interceptor will filter out lint and sediment from the fixture waste line before entering the pipe system to reduce clogging. Interceptor is cleaned by removing the top gasketed lid and accessing the internal straining baffle. Simple latch design permits fast and easy removal of the lid for cleaning and maintenance. HDPE injection molded body and lid are covered by a limited lifetime warranty. All T&C interceptors can withstand a temperature of up to and including 180 degrees Fahrenheit.

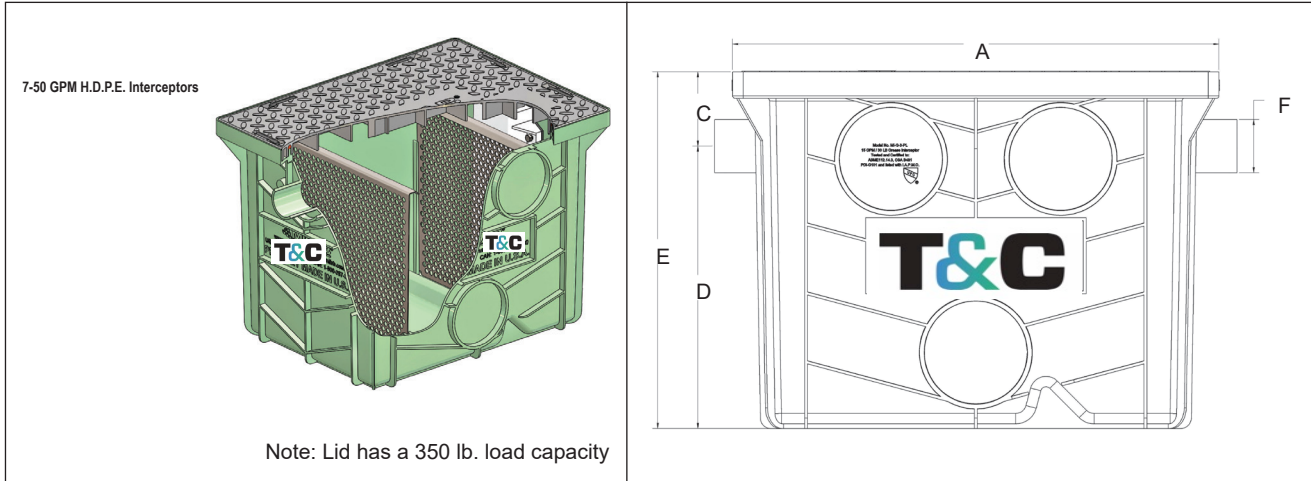

MODEL NO.	FLOW RATE (GPM)	LIQUID HOLDING CAPACITY(U.S.G.)	A (IN)	B (IN) WIDTH	C (IN)	D (IN)	E (IN)	F (IN)	Shipping Weight (lbs.) (in box)	Box Dimensions (L x W x H)	List Price
LI-PL-7	7	7.14	19.5	15.5	3.5	9	12.5	2	21	22" x 16" x 13"	\$900.00
LI-PL-10	10	10.99	23	17.5	3.5	9.75	13.25	2	30	25" x 18" x 14"	\$1,000.00
LI-PL-15	15	19.77	23	17.5	3.5	13.25	16.75	2	33	25" x 18" x 17.5"	\$1,100.00
LI-PL-20	20	18.57	29.5	20.5	3.5	10.75	14.25	3	41	32" x 21" x 15"	\$1,500.00
LI-PL-25	25	26.60	29.5	20.5	3.5	14.75	18.25	3	44	32" x 21" x 19"	\$1,600.00
LI-PL-35	35	44.56	33	25.5	5.5	16.75	22.25	3	57	35" x 26" x 23"	\$1,900.00
LI-PL-50	50	50.41	33	25.5	5.5	18.75	24.25	3	71	35" x 26" x 25"	\$2,700.00

SUFFIX	OPTIONAL VARIATIONS	LIST PRICE
-C	Extension "C" as required (up to 9" increments) (for 20 & 25 gpm) (contact T&C for other model extensions)	
-C	Extension "C" as required (up to 9" increments) (for 35 and 50 gpm)	
-F	Connection sizes different from standard (specify size) (by using a T&C increasing / reducing coupling).	
-FSCR	Stainless steel fine screen sediment bucket for PL-7	
-FSCR	Stainless steel fine screen sediment bucket for PL-10	
-FSCR	Stainless steel fine screen sediment bucket for PL-15	
-FSCR	Stainless steel fine screen sediment bucket for PL-20	
-FSCR	Stainless steel fine screen sediment bucket for PL-25	
-FSCR	Stainless steel fine screen sediment bucket for PL-35	
-FSCR	Stainless steel fine screen sediment bucket for PL-50	
-HD	Heavy duty 10 gauge steel lid (up to 2,000 lbs.) -	
-LHSI	No hub inlet on left hand side (not available with sediment bucket)	
-RHSI	No hub inlet on right hand side (not available with sediment bucket)	
-SP-IN	External Sampling Port - inline (part # TC-PL-SP)	
-SP-OF	External Sampling Port - offset (part # TC-PL SP-OF)	
-T	Female threaded connections	