


Specification: MIFAB® SM-MI-O-PL-750 oil interceptor with 750 U.S. gallons of liquid holding capacity has a limited lifetime warranty and is made in the U.S.A. out of seamless, rotationally molded High Density Polyethylene with 3/8" uniform wall thickness. Interceptor is designed for above or below ground installation and includes an adjustable lid system, sample port access, deep seal trap covered by lid, internal air relief by-pass, adjustable oil draw-off assembly (1 1/2" I.P.S.) on each side, double vent connections (3" I.P.S.) on each side, stainless steel calibrated orifice plate (internal flow control), base for support and floor level installation and 4" no hub inlet and outlet connections. Steel encased composite lids provide a water / gas tight seal and have a minimum of 20,000 LB. load capacity - in accordance with the loading requirements of AASHTO H20. The high density polyethylene material is PE 3135 from Dow 9.39 with a density of 0.939 g/cm3.

Function: Oil interceptors are required anywhere oil and sand may be introduced to the public sewer system in applications such as: repair garages, oil change stations, car wash facilities, parking garages, parking lots, hydraulic elevator pits and facilities where oil and flammable liquid waste are produced as a result of manufacturing, storage, maintenance, repair or testing processes. The interceptor collects the oil before it is drained to an adjacent storage tank through an adjustable draw off system. Sediment and debris are collected inside of the internal sediment bucket. Typically installed either on or into the floor. Regular maintenance is required to keep the interceptor functioning.

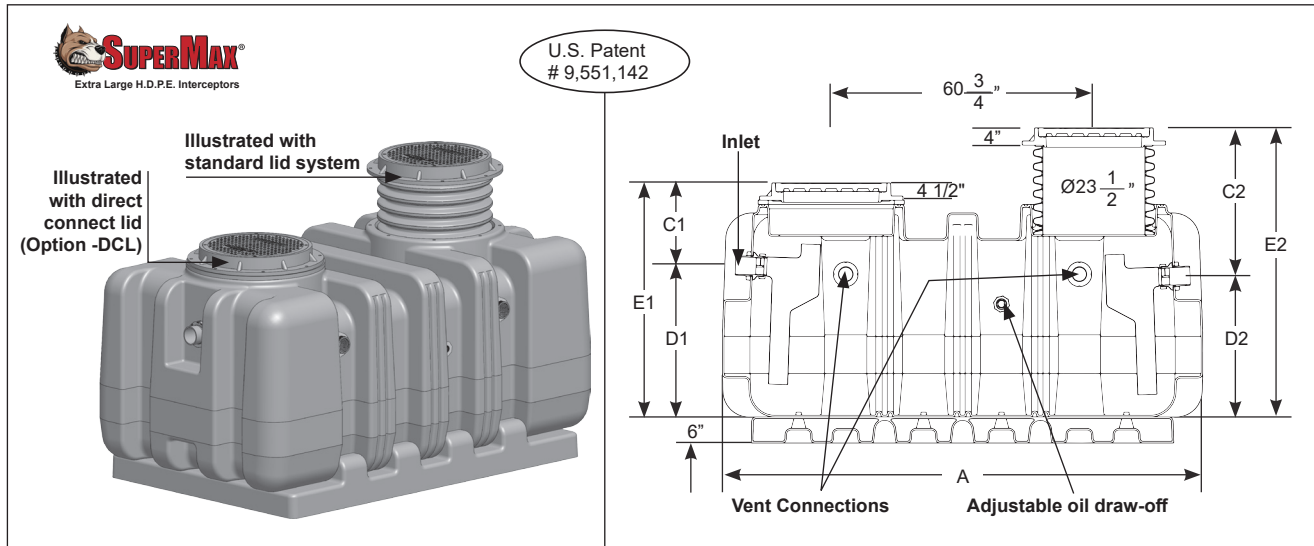

Model	Liquid Holding Capacity	Flow Rate (GPM)	A	Width B	C ¹ Dim.	C ² Dim.	D ¹ Dim.	D ² Dim.	E ¹ Dim.	E ² Dim.	F Connection Size	Shipping Weight (Lbs.)	List Price (Oil Interceptor)	List Price (Holding Tank)
SM-MI-O-PL-750	750 U.S. Gallons 2,840 litres	250	111" 2820mm	64" 1630mm	18.75" 476mm	37.25" 946mm	34.88" 886mm	32.88" 835mm	53.63" 1362mm	70.13" 1781mm	4" 102mm	1,025	\$23,900.00	\$17,925.00

Suffix	Optional Variations	List Price
-AK	High water anchor kit (set of two)	\$1,208.00
-C	Lid extension (specify dimension required)	\$400.00 per 12"
-COA	Coalescer Pack	\$3,000.00
-DI	Ductile iron lid & collar	\$1,322.00
-FL-C	Membrane clamp kit	\$600.00
-F6	6" No Hub Inlet / Outlet connection (flow rate of 375 GPM with 6" connections)	\$78.00
-HLA	High level alarm and float switch (to be installed on site)	\$661.00
-HT	Holding Tank	See above
-LHSI	4" no hub inlet on left hand side	\$55.00
-LHSO	4" no hub outlet on left hand side	\$55.00
-RHSI	4" no hub inlet on right hand side	\$55.00
-RHSO	4" no hub outlet on right hand side	\$55.00
-RPO	4" Remote pump outlet connections on top of interceptor - specify location and number required	\$100.00, each
-SB	Sediment bucket	\$1,500.00
-SP	External Sample Port (for existing construction. Inlet and Outlet on the same level)	\$2,370.00
-SP-OF	External Sample Port (for new construction. Inlet higher than the outlet).	\$2,370.00
-SST	Fire resistant fabricated stainless steel interceptor	Contact MIFAB®
-ST	Fire resistant fabricated 10 gauge powder epoxy coated steel interceptor	Contact MIFAB®

Design and dimensions are subject to modification. Prices do not include applicable taxes. Visit www.mifab.com for the most recent product information.