




## Model #R-48-36-48 / HDPE

### Rigid Plastic Grease Trap (Approximately 52"x40"x49" O.D.)

With 4" INLET AND OUTLET FITTINGS locations per jobsite conditions We would supply a molded seamless unit rather than a riser attached to the grease trap. This unit would also have steel external bracing to prevent bulging. You can choose which tank size works best with your application.

**Entire bottom of grease trap must be supported**

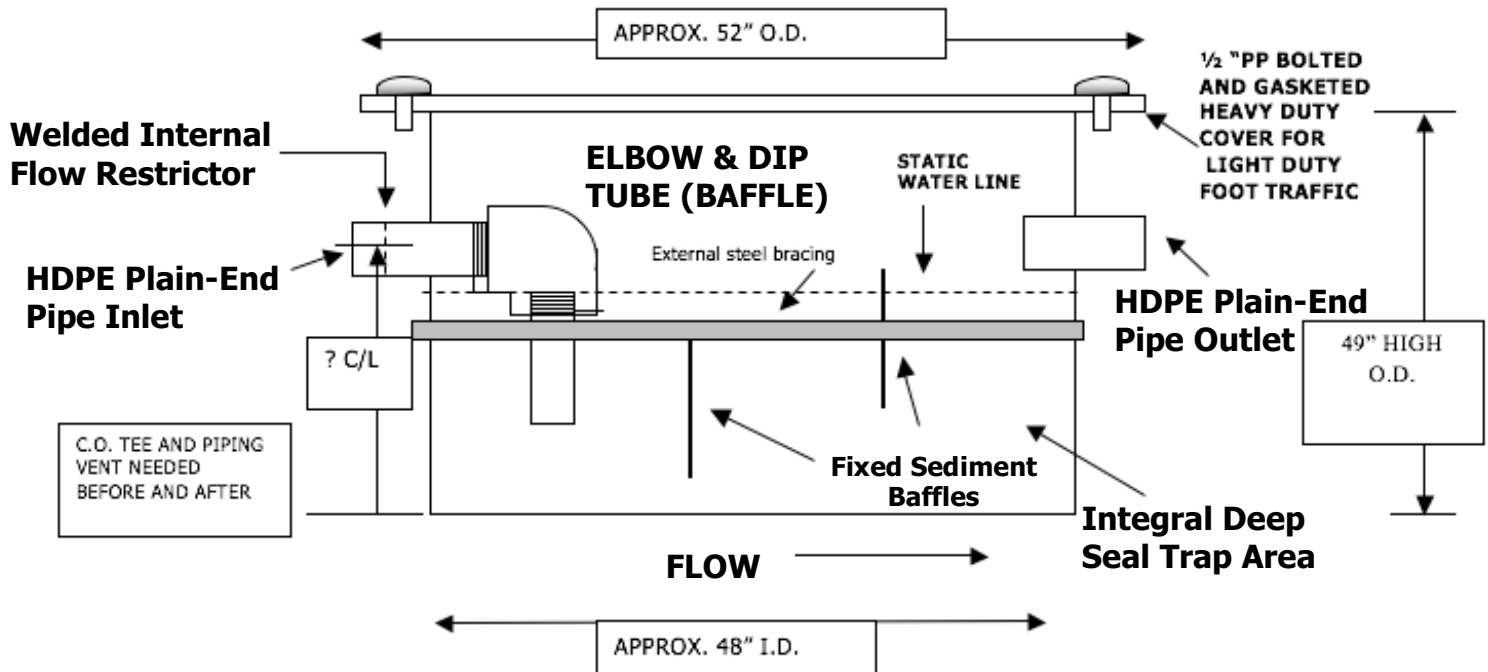

**NOTE:** SPECIAL TRAFFIC COVERS AVAILABLE, AT EXTRA COST.

3" PLAIN END PIPE CONNECTIONS ARE STANDARD ON ALL LARGER UNITS. HOWEVER, ANY CAN BE ORDERED WITH ANY SIZED FITTING CONNECTION, UP THRU 4". \* PLAIN END HDPE PIPE CONNECTIONS ON T&C UNITS ARE FOR FERNCO, M-G COUPLINGS, AND OTHER MECHANICAL JOINT (M/J) FITTINGS ONLY. INSTALLER CANNOT CEMENT THESE HDPE CONNECTIONS! THESE UNITS HAVE INTERNAL FLOW RESTRICTORS INSIDE INLET CONNECTIONS, INSTEAD OF SEPARATE FLOW CONTROL TEES.