
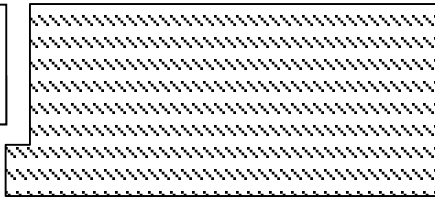
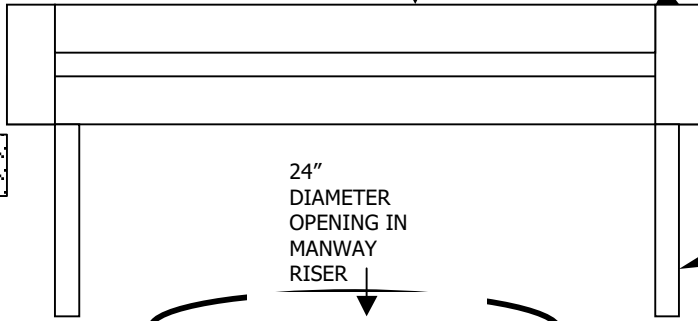


FLOOR GRADE REINFORCED CONCRETE WITH REBARS BY INSTALLER

MODEL # 48S STEEL TRAFFIC COVER

STEEL FRAME

FLOOR GRADE REINFORCED CONCRETE WITH REBARS BY INSTALLER

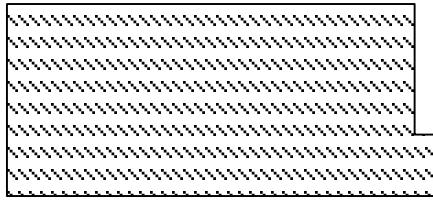

TOWN & COUNTRY PLASTICS

Customized For Precision

UNDERGROUND HAZARDOUS WASTE TANK INSTALLATION

48" SQUARE STEEL MANHOLE COVER AND FRAME ASSEMBLY TO BE SET IN CONCRETE WITH REBARS, BY INSTALLER

THREADED FITTINGS:

1. INLET FILL
2. VENT
3. HIGH / LOW LEVEL FLOAT(S)
4. PUMP OUT OUTLET


42" DIAMETER MANWAY RISER SHIPPED LOOSE (CAN BE TIMMED IN FIELD) APPROX. 47" HIGH)

24" DIAMETER OPENING IN MANWAY RISER


4" PP THR. SUCTION PIPE WITH CAP, BY CONTRACTOR

CONTRACTOR TO ATTACH RISER TO TANK BODY WITH FIBERGLASS RESIN AND MATING, FROM LOCAL SUPPLIERS, IF SHIPPED UNATTACHED

PENETRATIONS THRU RISER MUST BE MADE WITH BULKHEAD FITTINGS



LEAK DETECTION ALARM PANEL INSIDE BLDG.



LEVEL ALARM AND SWITCH BOX INSIDE BLDG.

16" I.D. MANHOLE AND COVER WITH THREADED FITTINGS (LARGER 20" I.D. ON 2,000 AND 3,000 GALLON TANKS)

16" M.H. WITH FITTINGS IN COVER

LEAK DETECTION FITTING

T & C HOLD DOWN STRAP ASSEMBLY


CONCRETE DEADMAN (3) REQUIRED TO BE SUPPLIED FROM T & C

T & C 63" DIAMETER, 550 GALLON, SPHERICAL TRIPLE WALL FIBERGLASS, HAZARDOUS WASTE, WASTE WATER UNDERGROUND TANK U.L. LABELLED

PEA GRAVEL BY INSTALLER

NOTE: OTHER SPHERICAL SHAPE SIZES AVAILABLE, UP TO 3,000 GALLON, LARGER SIZES COME IN HORIZONTAL / CYLINDRICAL SHAPE WITH DISHED ENDS

CONTACT T & C FOR DETAILED INSTALLATION INSTRUCTION SHEETS!



SIDE VIEW

* HDPE = HIGH DENSITY POLYPROPYLENE
* PP = POLYPROPYLENE