
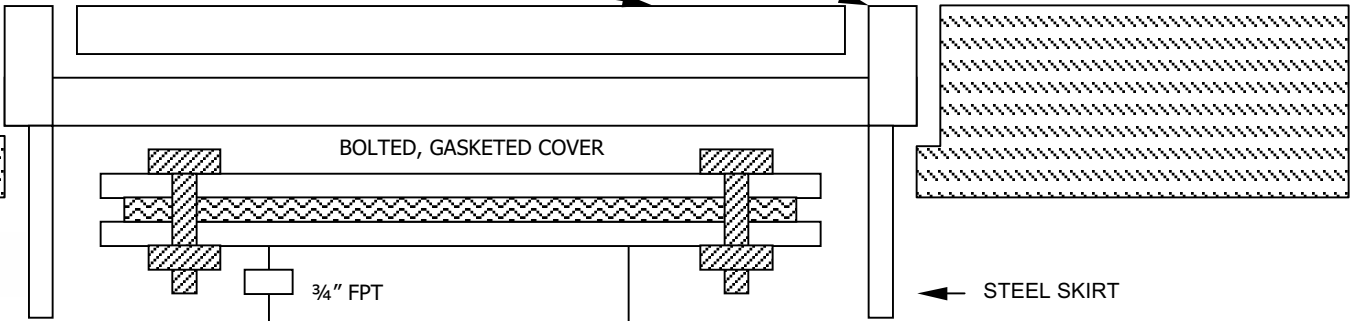


FLOOR GRADE REINFORCED CONCRETE WITH REBARS BY INSTALLER


MODEL # 36S

STEEL TRAFFIC COVER

STEEL FRAME


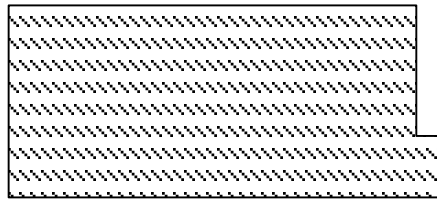


**UNDERGROUND HAZARDOUS WASTE TANK INSTALLATION**

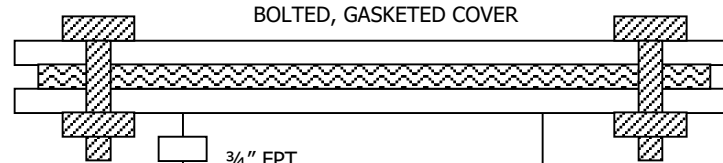

STEEL SKIRT

3/4" FPT



T & C HDPE SPILL CONTAINMENT MANHOLE (MODEL # S-15 / HDPE)

3/4" PIPING WITH 1/4" TUBING INSIDE

TWO PP THREADED BULKHEAD

THREADED FITTINGS:


1. INLET FILL
2. VENT
3. HIGH / LOW LEVEL FLOAT(S)
4. PUMP OUT OUTLET

INLET FILL

PIPES BY INSTALLER

VENT

LEAK DETECTION ALARMS AND SWITCH BOXES (LOW AND HIGH) INSIDE BLDG.



**THREE** TANK LEVEL ALARMS WITH SWITCH BOXES INSIDE BLDG. (ONE HIGH TANK LEVEL AND TWO MONITOR CHAMBER LEAK DETECTION)

T & C M.H. WITH FITTINGS IN COVER

(4) 2" FEMALE THR. CONNECTIONS IN M.H. COVERS

LEAK DETECTION FITTING - 3/4" FPT AND 1/4" TUBING INSIDE


T & C HOLD DOWN STRAP ASSEMBLY

T & C SPHERICAL DOUBLE WALL FIBERGLASS UNDERGROUND TANK (285 GALLONS TO 3,000 GALLONS - SPECIFY MODEL NUMBER)

T & C CONCRETE DEADMAN (3)

PEA GRAVEL BY INSTALLER

**CONTACT T & C FOR DETAILED INSTALLATION INSTRUCTION SHEETS!**



**SIDE VIEW**

\* HDPE = HIGH DENSITY POLYPROPYLENE  
\* PP = POLYPROPYLENE