




**TOWN & COUNTRY PLASTICS**

*Customized For Precision*

10-B Timber Lane, Marlboro, NJ 07746 • (732) 780-5300 • FAX: (732) 294-0001 • [www.tandoplastics.com](http://www.tandoplastics.com)

## **FLOOR DRAIN INSTALLATION INSTRUCTIONS**

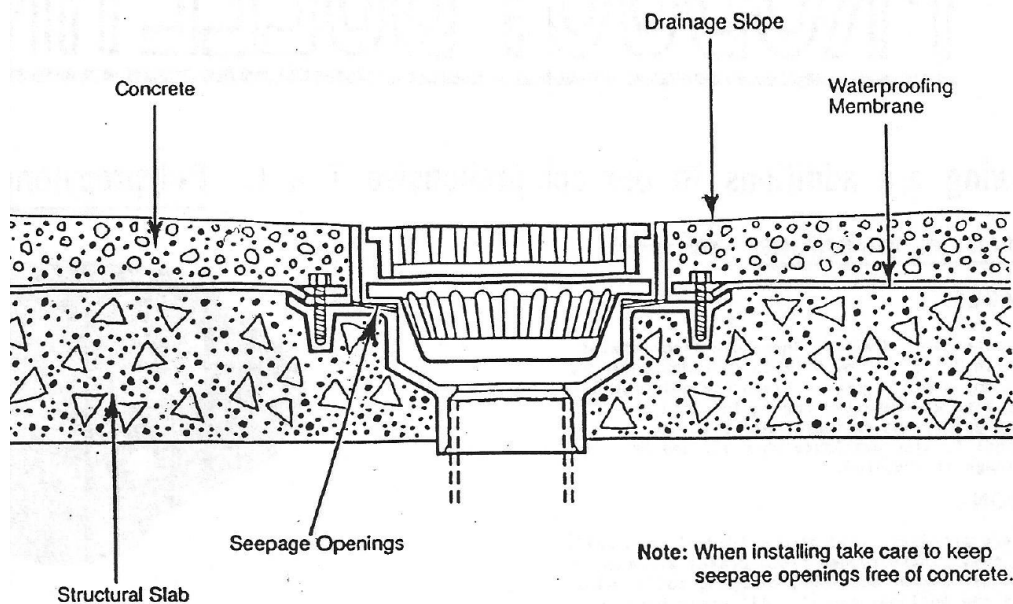

### **Fast, Secure Installation**

Each lightweight, pre-assembled unit can be installed in minutes. And when drains have to be placed in those awkward, hard to get places, the new T&C floor drains can be carried considerable distance with ease. Couple these benefits with the fact that this floor drain can be adapted to all types of floor construction and finishes and you have a real money saver. Membrane can be hot mopped over the floor drain body before installing the clamp ring.

### **Use**

For use in light traffic areas where a shallow drain is required. In on-grade locations, body flange and flashing collar work as an anchor. When installed in waterproof floors, they serve as a flashing device. Suitable for use in commercial, industrial and residential applications where water and other fluids must be removed. Where corrosive conditions are encountered check with your T&C sales representative about the use of our highly chemical resistant PP floor drains.

### **Product Specification**

Fixed height, light traffic areas

**SERIAL MODEL NUMBER #PP-7750 POLYPROPYLENE (PP) FOR CHEMICAL WASTES**

*Long form:*

Furnish and install a (PVC) (ABS) Plastic Floor Drain T&C No.'s 4750 (3" outlet), 4751 (4" outlet), manufactured by Town & Country Plastics, LLC, for light traffic areas with 8" diameter grate, sediment strainer, removable flashing collar secured with 6 rust resistant bolts, wide flange body.

*Short form:*

Furnish and install a (PVC) (ABS) Plastic Floor Drain T&C No.'s 4750 (3" outlet), 4751 (4" outlet), complete with grate, removable strainer, and wide flange body.